

### STRATO-THERM DIAMOND GRIP

TE Internal #: 321898


Closed Ring Tongue Terminal, 22 – 16 AWG, #10 Stud, 5 mm [.197 in] Stud Diameter, Closed Barrel, Straight, Nickel Plating, STRATO-

THERM DIAMOND GRIP

View on TE.com >



Terminals & Splices > Ring Terminals

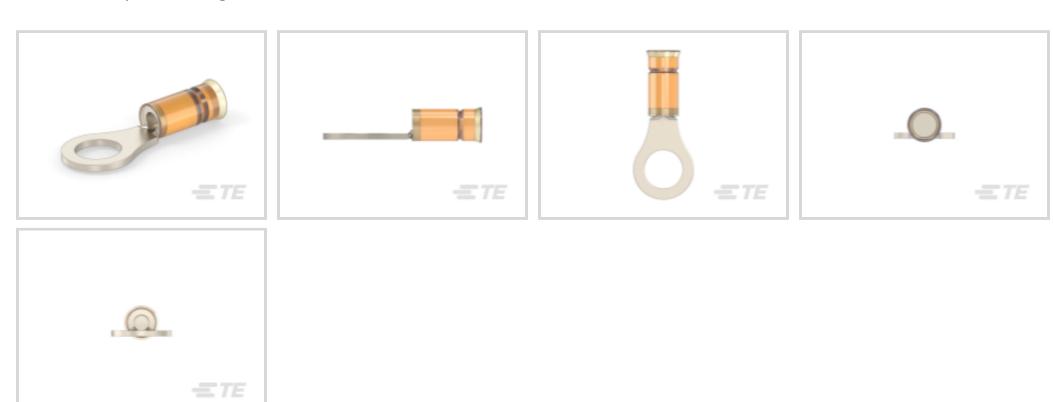

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: **509 – 3260 CMA** 

Stud Size: #10

### **Features**

### **Product Type Features**

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#10
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Body Features	
Product Weight	1.95 g
Insulation Sleeve Color	Orange
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Nickel
Mechanical Attachment	

With

Wire Insulation Support



#### **Dimensions**

Wire Size	509 – 3260 CMA
Stud Diameter	5 mm[.197 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	20.22 mm[.796 in]
Compatible Insulation Diameter (Max)	3.56 mm[.14 in]
Compatible Insulation Diameter Range	2.67 – 3.56 mm[.105 – .14 in]
Usage Conditions	

#### Usage Conditions

Insulation Option	Uninsulated	
Industry Standards		

No

# Packaging Features

Government Qualified Terminal

Packaging Quantity	1000
Packaging Method	Loose Piece

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts








# Also in the Series | STRATO-THERM DIAMOND GRIP



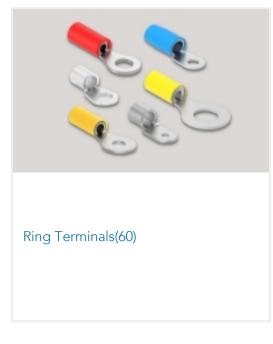



# Customers Also Bought























### **Documents**

### **Product Drawings**

DIAMOND GRIP 22-16 HT R 10

English

### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_321898\_V.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_321898\_V.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_321898\_V.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# Datasheets & Catalog Pages

STRATO-THERM Terminals & Splices for High Temperature Applications

English

# **Product Specifications**

**Application Specification** 

English

### **Instruction Sheets**

Instruction Sheet (U.S.)

English