

SOLISTRAND

TE Internal #: 323683 Closed Ring Tongue Terminal, 12 – 10 AWG, 1/4 / M6 Stud, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Nickel Plating, Uninsulated

View on TE.com >

Terminals & Splices > Ring Terminals



Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: 1/4, M6

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal 1/4, M6	
Stud Size		
Sealable	No	
Wire Insulation Support Retention Type	Non-Insulation Support	
Configuration Features		
Number of Holes	1	
Body Features		
Product Weight	2.564 g	
Contact Features		
Barrel Type	Closed	
Terminal Orientation	Straight	
Terminal Plating Material	Nickel	
Mechanical Attachment		
Wire Insulation Support	Without	
Dimensions		



323683

Closed Ring Tongue Terminal, 12 – 10 AWG, 1/4 / M6 Stud, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Nickel Plating, Uninsulated



Wire Size	5180 – 13100 CMA
Stud Diameter	6.73 mm[.265 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	25.5 mm[1.004 in]
Barrel Inside Diameter	3.28 mm[.129 in]
Usage Conditions	
Insulation Option	Uninsulated
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	500
Packaging Method	Loose Piece
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC			
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free			
Solder Process Capability	Not applicable for solder process capability			

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

323683


Closed Ring Tongue Terminal, 12 – 10 AWG, 1/4 / M6 Stud, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Nickel Plating, Uninsulated




Compatible Parts



Customers Also Bought

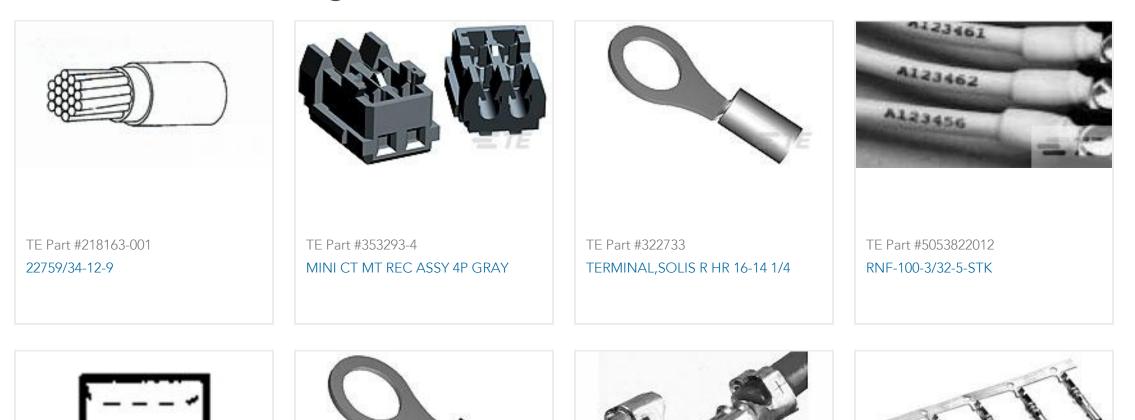

. 15				
TE Part #322347 SPLICE,SOLIS PARA HT 16-14	TE Part #322334 TERMINAL,SOLIS R HT 16-14 8	TE Part #353918-1 CT 1.5MM REC CONT CRIMP TYPE	TE Part #66331-8 III+ SKT,24-20,30AU/FL,STRIP	

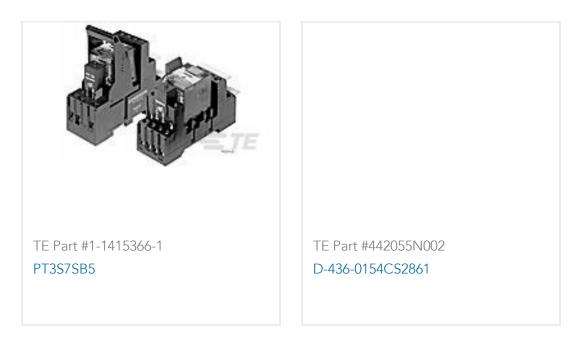

Documents

Product Drawings TERMINAL, SOLIS R HT 12-10 1/4

English

CAD Files

Customer View Model

323683

Closed Ring Tongue Terminal, 12 – 10 AWG, 1/4 / M6 Stud, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Nickel Plating, Uninsulated



ENG_CVM_CVM_323683_P.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_323683_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_323683_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages STRATO-THERM Terminals & Splices for High Temperature Applications

English