



Terminals & Splices > Splices



Splice Type: **Butt Splice**

Wire Size: **3 – 6 mm<sup>2</sup>**

Sealable: **No**

Splice Features: **Serrated**

Features

Product Type Features

|  |                        |
|--|------------------------|
| Splice Accessory Type                  | Splice                 |
| Splice Type                            | Butt Splice            |
| Sealable                               | No                     |
| Compatible With Discrete Wire Type     | Solid, Stranded        |
| Wire Insulation Support Retention Type | Non-Insulation Support |

Configuration Features

|                                   |               |
|-----------------------------------|---------------|
| Compatible With Wire & Cable Type | Discrete Wire |
|-----------------------------------|---------------|

Body Features

|                 |          |
|-----------------|----------|
| Product Weight  | 4.416 g  |
| Splice Features | Serrated |

Contact Features

|                           |         |
|---------------------------|---------|
|                           | 300 μin |
| Terminal Plating Material | Nickel  |
| Contact Base Material     | Copper  |



|             |        |
|-------------|--------|
| Barrel Type | Closed |
|-------------|--------|

Mechanical Attachment

|                         |         |
|-------------------------|---------|
| Wire Insulation Support | Without |
|-------------------------|---------|

Dimensions

|                             |                   |
|-----------------------------|-------------------|
| Outside Diameter            | 5.74 mm[.226 in]  |
| Wire Size                   | 5180 – 13100 CMA  |
| Barrel Inside Diameter      | 3.28 mm[.129 in]  |
| Terminal Material Thickness | .99 mm[.039 in]   |
| Product Length              | 14.35 mm[.565 in] |

Usage Conditions

|                   |             |
|-------------------|-------------|
| Insulation Option | Uninsulated |
|-------------------|-------------|

Operation/Application

|                                    |        |
|------------------------------------|--------|
| Compatible With Wire Base Material | Copper |
|------------------------------------|--------|

Industry Standards

|                             |    |
|-----------------------------|----|
| Government Qualified Splice | No |
|-----------------------------|----|

Packaging Features

|                    |             |
|--------------------|-------------|
| Packaging Quantity | 500         |
| Packaging Method   | Loose Piece |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|   |  |
|---|--|
| EU RoHS Directive 2011/65/EU                  | Compliant  |
| EU ELV Directive 2000/53/EC                   | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free  |
| Solder Process Capability                     | Not applicable for solder process capability   |

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




REPRESENTATION ONLY

TE Part # 46447  
DAHT STRATO 22-10 ASSY


Customers Also Bought

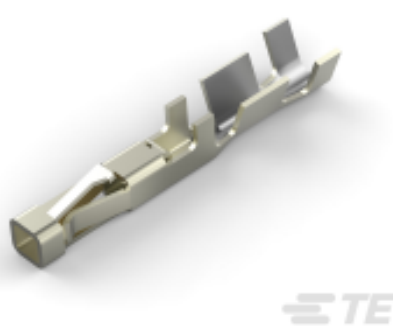


TE Part #1-794606-3  
MICRO MNL RPT CNT STRP 30AU LF

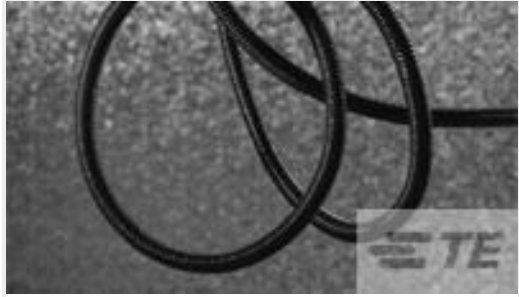


TE Part #0638514002  
HCTE-0312-0-SP




TE Part #42037  
RING TERMINAL 22-18 AWG TPBR




TE Part #YCTJ-3A-02C0160000  
RAIL ASSY

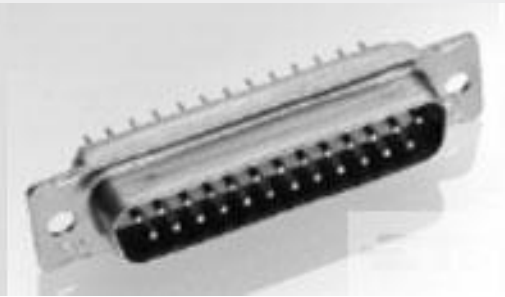


TE Part #204517-2  
AMPLIMITE,ASY,PLUG,STD,90,3




TE Part #YDTS26F21-35SBV001  
PLUG ASSY



TE Part #6100020004  
D-300-12CS1108



TE Part #617867N001  
D-436-0186CS1102

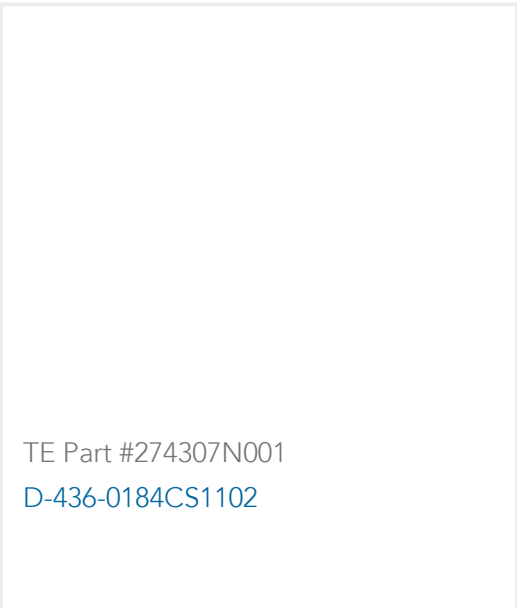

Documents

Product Drawings

TERM, SPLC, BUTT, STRAT, SOLIS, HR 12-10

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_323755\_F.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_323755\_F.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_323755\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

STRATO-THERM Terminals & Splices for High Temperature Applications

English