


SOLISTRAND

TE Internal #: 327025 Butt Splice, 16 – 14 AWG, 1.25 – 2 mm² Wire, Serrated, 2050 – 5180 CMA, Copper, 8 Serration, 15.01 mm [.591 in] Length, Loose Piece, Closed Barrel

View on TE.com >

Terminals & Splices > Splices

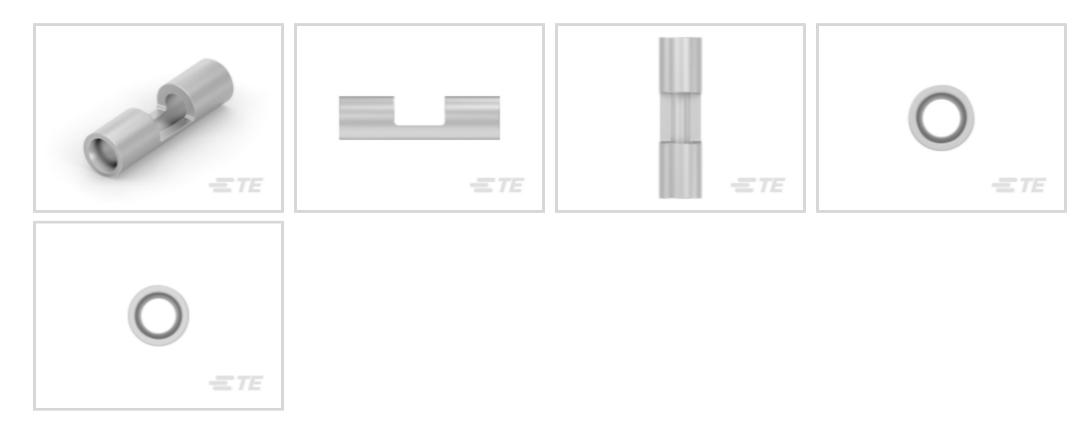

Splice Type: Butt Splice

Wire Size: **1.25 – 2 mm²**

Sealable: No

Splice Features: Serrated

Features

Product Type Features



Splice Accessory Type	Splice	
Splice Type	Butt Splice	
Sealable	No	
Compatible With Discrete Wire Type	Solid	
Wire Insulation Support Retention Type	Non-Insulation Support	
Configuration Features		
Number of Serrations	8	
Compatible With Wire & Cable Type	Discrete Wire	
Body Features		
Splice Features	Serrated	
Contact Features		
Terminal Plating Thickness	2.54 μm[100 μin]	
Terminal Plating Thickness Terminal Plating Material	2.54 μm[100 μin] Tin	

Butt Splice, 16 – 14 AWG, 1.25 – 2 mm² Wire, Serrated, 2050 – 5180 CMA, Copper, 8 Serration, 15.01 mm [.591 in] Length, Loose Piece, Closed Barrel



Without
Without
2.16 mm[.085 in]
4.19 mm[.165 in]
2050 – 5180 CMA
2.16 mm[.085 in]
.84 mm[.033 in]
15.01 mm[.591 in]
Uninsulated
Copper
No

Packaging Method

1000

Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

C For support call+1 800 522 6752

Butt Splice, 16 – 14 AWG, 1.25 – 2 mm² Wire, Serrated, 2050 – 5180 CMA, Copper, 8 Serration, 15.01 mm [.591 in] Length, Loose Piece, Closed Barrel



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

TE Part # 58545-4 SOLISTRAND 10-22 DIE ASSY.	TE Part # 49935 DAHT SOLIS 22-10 ASSY	TE Part # 58545-3 SDE DIE ASSY. 22-10 SOLISTRAND	TE Part # 58545-1 SOLISTRAND 10-22 DIE ASSY






Customers Also Bought



Butt Splice, 16 – 14 AWG, 1.25 – 2 mm² Wire, Serrated, 2050 – 5180 CMA, Copper, 8 Serration, 15.01 mm [.591 in] Length, Loose Piece, Closed Barrel



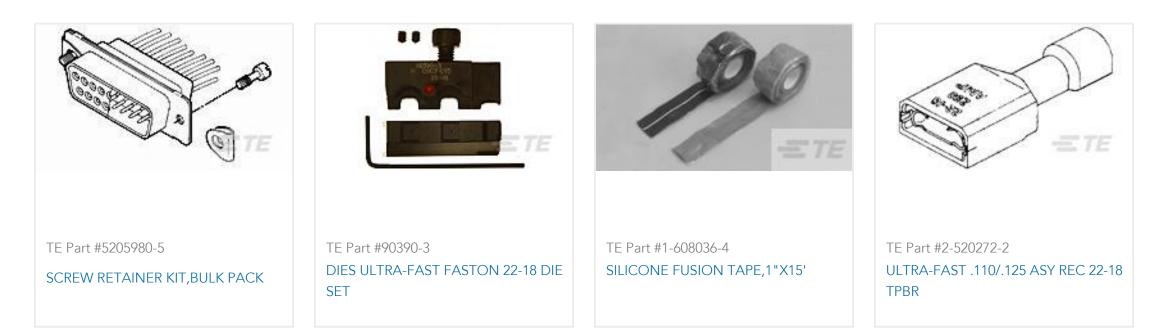



Documents

Product Drawings SPLICE, SOLIS BUTT STRAP 16-14

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_327025_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_327025_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_327025_F.3d_stp.zip

English

Customer View Model ENG_CVM_327025_B.3d_igs.zip

English

Customer View Model

ENG_CVM_327025_B.3d_stp.zip

English

Customer View Model

ENG_CVM_327025_B.2d_dxf.zip

English

3D PDF

English

C For support call+1 800 522 6752

Butt Splice, 16 – 14 AWG, 1.25 – 2 mm² Wire, Serrated, 2050 – 5180 CMA, Copper, 8 Serration, 15.01 mm [.591 in] Length, Loose Piece, Closed Barrel



By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals UL Report

English