

PLASTI-GRIP

TE Internal #: 34069 Butt Splice, 12 – 10 AWG, 3 – 6 mm² Wire, Serrated, 5180 – 13100 CMA, Copper, Yellow, 29.46 mm [1.16 in] Length, Loose Piece, PLASTI-GRIP

View on TE.com >

Terminals & Splices > Splices



Splice Type: Butt Splice

Wire Size: **3–6 mm²**

Sealable: No

Splice Features: Serrated

Features

Product Type Features



Splice Accessory Type	Splice
Splice Type	Butt Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Product Weight	.568 g
Insulation Material	Vinyl
Splice Features	Serrated
Primary Product Color	Yellow
Primary Product Color Contact Features	Yellow

Butt Splice, 12 – 10 AWG, 3 – 6 mm² Wire, Serrated, 5180 – 13100 CMA, Copper, Yellow, 29.46 mm [1.16 in] Length, Loose Piece, PLASTI-GRIP



Contact Base Material	Copper
Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	5180 – 13100 CMA
Compatible Insulation Diameter Range	5.08 mm[.2 in]
Product Length	29.46 mm[1.16 in]
Jsage Conditions	
Insulation Option	Fully Insulated
Operation/Application	
Compatible With Wire Base Material	Copper
ndustry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	500
Packaging Method	Loose Piece

Packaging Method

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

Butt Splice, 12 – 10 AWG, 3 – 6 mm² Wire, Serrated, 5180 – 13100 CMA, Copper, Yellow, 29.46 mm [1.16 in] Length, Loose Piece, PLASTI-GRIP



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts






TE Part # 169404

CERTI-LOK DIE

Also in the Series | PLASTI-GRIP

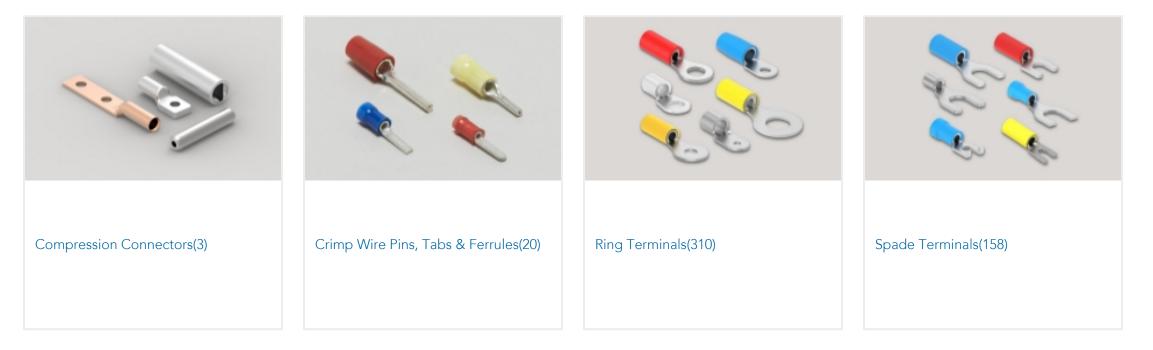




Splices(45)

C For support call+1 800 522 6752

Butt Splice, 12 – 10 AWG, 3 – 6 mm² Wire, Serrated, 5180 – 13100 CMA, Copper, Yellow, 29.46 mm [1.16 in] Length, Loose Piece, PLASTI-GRIP



Customers Also Bought

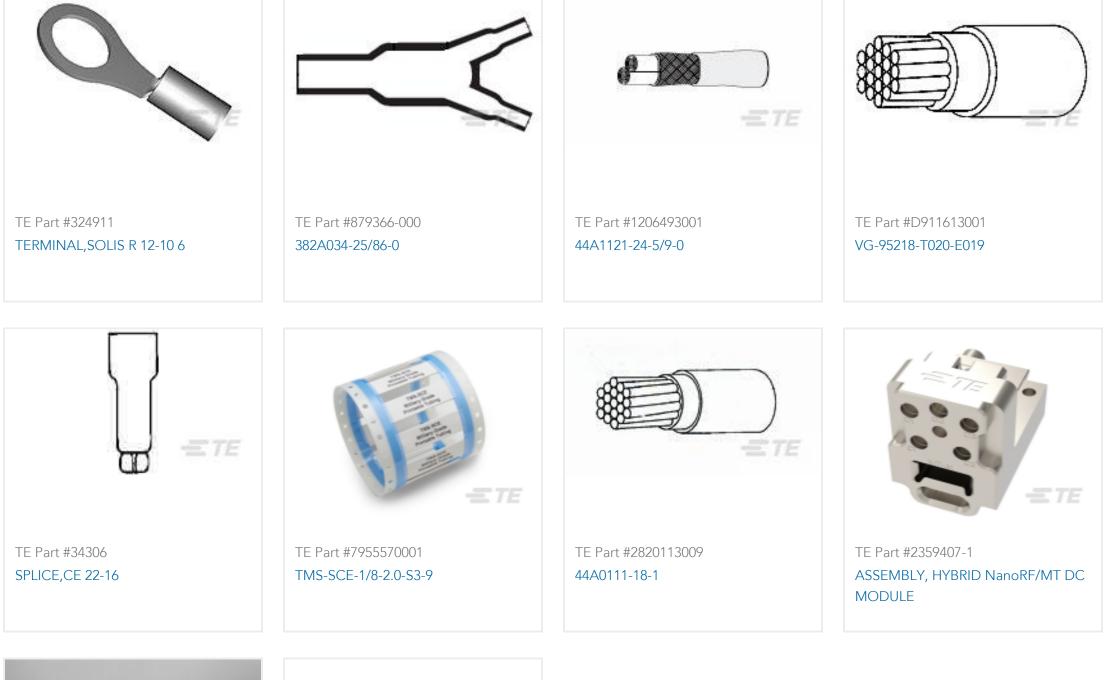



STVSKO H M 181 GERA 20A * CR02 * * MDME

TERMINAL, PIDG R 16-14 6

Documents

Product Drawings SPLICE,PG BUTT 12-10

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_34069_J.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_34069_J.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_34069_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

S For support call+1 800 522 6752

Butt Splice, 12 – 10 AWG, 3 – 6 mm² Wire, Serrated, 5180 – 13100 CMA, Copper, Yellow, 29.46 mm [1.16 in] Length, Loose Piece, PLASTI-GRIP



Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL

English