




Terminals & Splices > Ring Terminals

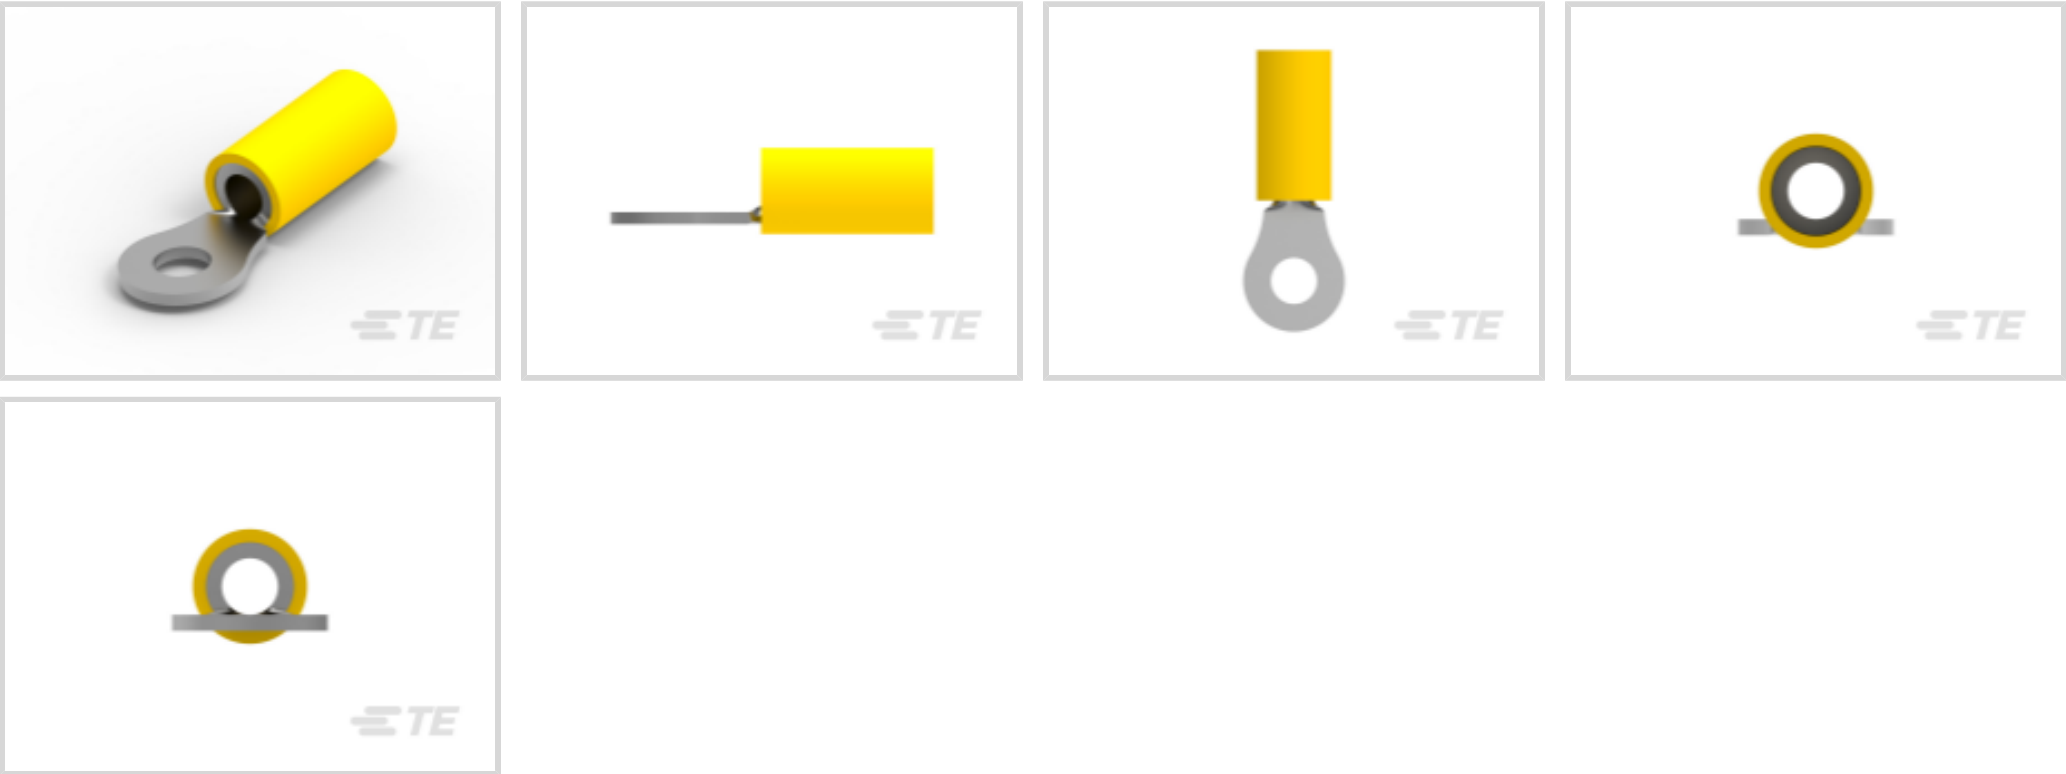

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: M5

Features

Product Type Features

|                                        |                             |
|----------------------------------------|-----------------------------|
| Terminal Features                      | Sheared                     |
| Ring Terminal Product Type             | Closed Ring Tongue Terminal |
| Stud Size                              | M5                          |
| Sealable                               | No                          |
| Wire Insulation Support Retention Type | Insulation Support          |

Configuration Features

|                 |   |
|-----------------|---|
| Number of Holes | 1 |
|-----------------|---|

Electrical Characteristics

|                |       |
|----------------|-------|
| Voltage Rating | 600 V |
|----------------|-------|

Body Features

|                         |        |
|-------------------------|--------|
| Product Weight          | .395 g |
| Insulation Sleeve Color | Yellow |
| Stripe Color            | Yellow |

Contact Features

|             |        |
|-------------|--------|
| Barrel Type | Closed |
|-------------|--------|



|                           |          |
|---------------------------|----------|
| Terminal Orientation      | Straight |
| Terminal Plating Material | Tin      |

Mechanical Attachment

|                         |         |
|-------------------------|---------|
| Wire Insulation Support | Without |
|-------------------------|---------|

Dimensions

|                                      |                               |
|--------------------------------------|-------------------------------|
| Wire Size                            | 5180 – 13100 CMA              |
| Stud Diameter                        | 5.25 mm [.207 in]             |
| Tongue Thickness                     | .79 mm [.031 in]              |
| Product Length                       | 27.88 mm [1.098 in]           |
| Compatible Insulation Diameter (Max) | 6.35 mm [.25 in]              |
| Compatible Insulation Diameter Range | 3.81 – 6.35 mm [.15 – .25 in] |

Usage Conditions

|                   |                     |
|-------------------|---------------------|
| Insulation Option | Partially Insulated |
|-------------------|---------------------|

Operation/Application

|                                       |        |
|---------------------------------------|--------|
| Compatible With Wire Base Material    | Copper |
| Compatible With Wire Plating Material | Tin    |

Industry Standards

|                               |    |
|-------------------------------|----|
| Government Qualified Terminal | No |
|-------------------------------|----|

Packaging Features

|                    |             |
|--------------------|-------------|
| Packaging Quantity | 500         |
| Packaging Method   | Loose Piece |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                |



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 169404  
CERTI-LOK DIE



TE Part # 59824-1  
TETRA-CRIMP PIDG PG FASTON 22-10 ASSY



TE Part # 59239-4  
HHHT PIDG PG 12-10 ASSY



TE Part # 58423-1  
DIE, RBY IS9252



TE Part # 58433-3  
PRO CR ASSY, RBY IS9252




TE Part # 525692  
HHHT PIDG PG 12-10 ASSY

Also in the Series | PLASTI-GRIP




Compression Connectors(3)

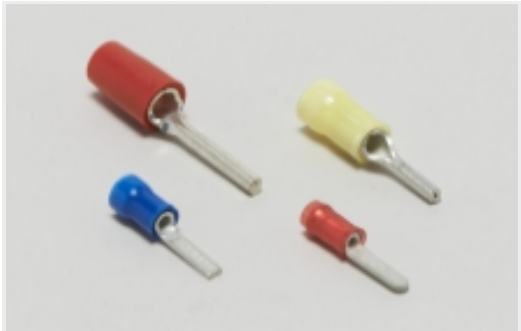

Crimp Wire Pins, Tabs & Ferrules(20)



Ring Terminals(310)

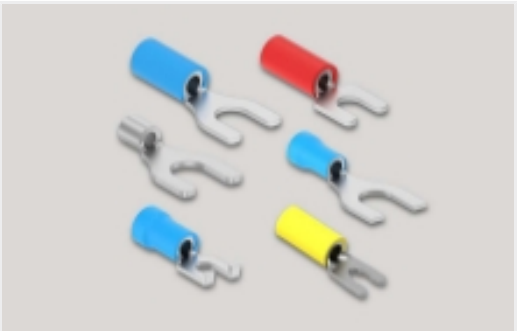

Spade Terminals(158)



Splices(45)

Customers Also Bought

TE Part #2102580-1  
ASSY 1/0 AL COPALUM LITE DUAL HOLE 3/8

TE Part #1-2834011-4  
4POS 3.5MM TOP ENTRY SCREWLESS CONN.

TE Part #1-66105-6  
III+ SKT,24-20,TIN-LEAD,SMPACK

TE Part #165015  
PLASTI-GRIP, SPADE 12-10 4.5MM

TE Part #1-2213767-5  
AV19 SPM 3A MOVE RING LED GREEN 24V

TE Part #52263  
TERMINAL R PG 8 10

TE Part #2351378-2  
M12 MALE,D4 CODE,STR CONNECTOR, PG9 SEAL

TE Part #31430  
TERMINAL,BUDG R 26-22 6

TE Part #3-2213767-5  
AV19 SPL 3A MOVE RING LED GREEN 24V

TE Part #342183-1  
12-10 F.E.P.G. RING TONGUE 3BA

Documents

Product Drawings  
12-10 F.E.P.G. RING TERMINAL

English

CAD Files  
3D PDF  
3D  
Customer View Model  
ENG\_CVM\_CVM\_342184-1\_R.2d\_dxf.zip



English

Customer View Model

[ENG\\_CVM\\_CVM\\_342184-1\\_R.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_342184-1\\_R.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English