
352131-1 - ACTIVE

Z-PACK | Z-PACK 2mm HM

TE Internal #: 352131-1 Hard Metric Backplane PCB Mount Header, ≤1 Gb/s, 22 Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline, Right Angle, Z-PACK 2mm HM

View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors >

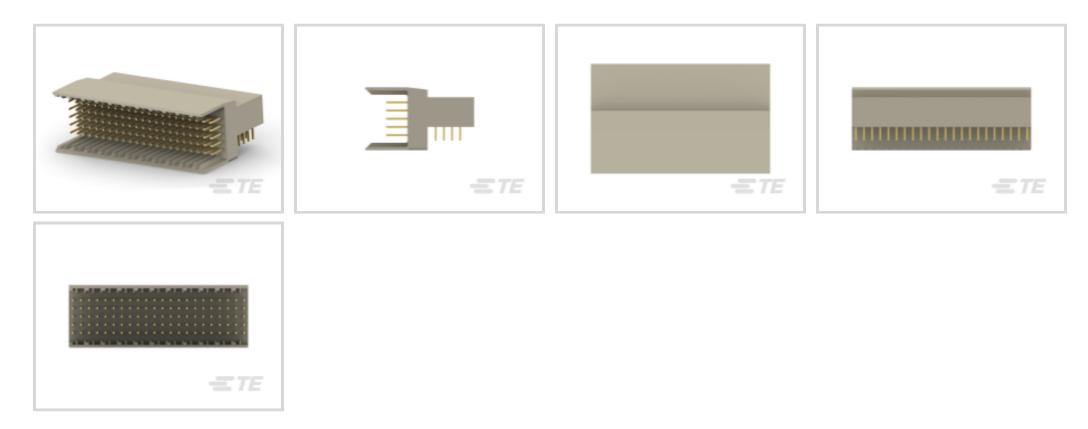

Hard Metric Backplane Male Connector: Right Angle, Coplanar, 2mm

PCB Connector Type: PCB Mount Header

Data Rate: **≤1 Gb/s**

Number of Columns: 22

Number of Rows: 5

Backplane Architecture: Mezzanine

All Hard Metric Backplane Male Connector: Right Angle, Coplanar, 2mm (20)



Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board			
Backplane Interface Type	2mm HM			
Connector System	Board-to-Board			
PCB Connector Type	PCB Mount Header			
Sealable	No			
Configuration Features				
Number of Columns	22			
Number of Rows	5			
Backplane Architecture	Mezzanine			
Number of Positions	110			
PCB Mount Orientation	Right Angle			

Signal Characteristics

Hard Metric Backplane PCB Mount Header, ≤1 Gb/s, 22 Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline, Right Angle, Z-PACK 2mm HM



Crosstalk Version	Standard				
Data Rate	≤1 Gb/s				
Body Features					
Primary Product Color	Gray				
Contact Features					
Contact Underplating Material	Nickel				
Contact Mating Area Length	3.3 mm				
Contact Base Material	Phosphor Bronze				
CompactPCI Designation	None				
PCB Contact Termination Area Plating Material	Tin-Lead				
Feedthrough Post Length	3.3 mm				
Contact Type	Pin				
Contact Mating Area Plating Material	Tin-Lead				
Contact Mating Area Plating Material Thickness	.5 μm[20 μin]				
Contact Current Rating (Max)	1.5 A				
Termination Features					

Termination Method to PCB

Through Hole - Press-Fit

Mechanical Attachment

Connector Mounting Type	Board Mount				
Front Mating Level	Level 1				
Housing Features					
Housing Material	Polyester GF				
Centerline (Pitch)	2 mm[.078 in]				
Dimensions					
Backplane Module Length	44 mm				
Usage Conditions					
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]				
Operation/Application					
Shielded	No				
Circuit Application	Power & Signal				
Industry Standards					

C For support call+1 800 522 6752

Hard Metric Backplane PCB Mount Header, ≤1 Gb/s, 22 Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline, Right Angle, Z-PACK 2mm HM



UL Flammability Rating	UL 94V-0					
Packaging Features						
Packaging Quantity	12					
Product Compliance						
For compliance documentation, visit the product page on TE.com>						
EU RoHS Directive 2011/65/EU	Not Compliant					
EU ELV Directive 2000/53/EC	Compliant with Exemptions					
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold					
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (13% in Component Part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.					
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.					
Solder Process Capability	Not applicable for solder process capability					

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Hard Metric Backplane PCB Mount Header, ≤1 Gb/s, 22 Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline, Right Angle, Z-PACK 2mm HM



Also in the Series Z-PACK 2mm HM



Board-to-Board Headers & Receptacles(46)




Connector Contacts(2)



Connector Hardware(91)




Hard Metric Backplane Connectors (266)

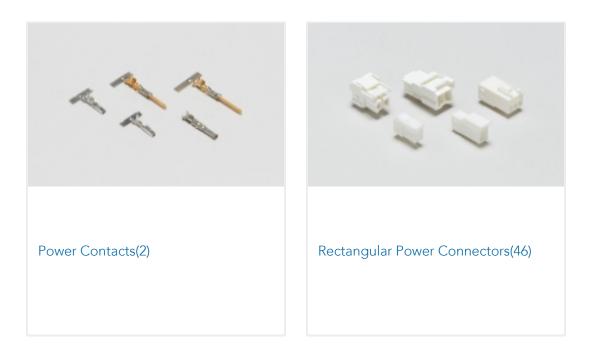

Customers Also Bought



TE Part #207526-8	TE Part #6469169-1	TE Part #5205868-1	TE Part #5188836-1
SKT HDR ASSY,9 POSN,METRIMATE	HMZD 2PR RA HDR 40P	15 RCPT RA/MS STD	Z-PACK/B22 RAF 110P
TE			TE
TE Part #1825910-6	TE Part #1-102155-0	TE Part #5406491-1	TE Part #5205737-7
FSM4JH=6MM TACT SWITCH, HIGH	050 UNIV HDR SP 4S 15DP STD	MJ,1X8,8POS,RV PNL GTABS	25 PLUG SP/MS STD

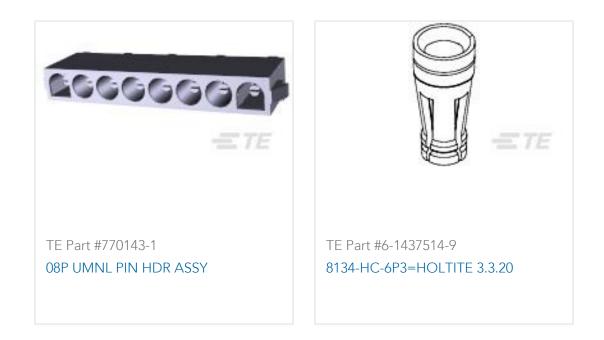

TEMP

Hard Metric Backplane PCB Mount Header, ≤1 Gb/s, 22 Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline, Right Angle, Z-PACK 2mm HM



Documents

Product Drawings Z-PACK/B RAMH.110P.

English

CAD Files

Customer View Model ENG_CVM_CVM_352131-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_352131-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_352131-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English