



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: **PCB Mount Receptacle**

PCB Mount Orientation: **Right Angle**

Connector System: **Board-to-Board**

Number of Positions: **20**

Number of Rows: **2**

Features

Product Type Features

Connector Shape	Rectangular
PCB Connector Type	PCB Mount Receptacle
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	10
Number of Loaded Positions	20
Connector Contact Load Condition	Fully Loaded
Board-to-Board Configuration	Co-Planar, Orthogonal
Stackable	No
PCB Mount Orientation	Right Angle



Number of Positions	20
Number of Rows	2

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	500 Vrms
---------------------------------------	----------

Body Features

Connector Profile	Standard
Primary Product Color	Black

Contact Features

Contact Shape & Form	Dual Beam
PCB Contact Termination Area Plating Material Thickness	4 – 6 µm[157.48 – 236.22 µin]
Contact Layout	Matrix
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Receptacle
Contact Current Rating (Max)	1.7 A

Termination Features

Termination Method to PCB	Surface Mount
---------------------------	---------------

Mechanical Attachment

Mounting Alignment Feature Length	.75 mm[.029 in]
PCB Mount Retention Type	Location Peg
Mating Alignment Type	Polarization
PCB Mount Alignment Type	Locating Posts
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Mating Entry Location	Side
Housing Material	LCP
Centerline (Pitch)	1.27 mm[.05 in]

Dimensions



Row-to-Row Spacing	1.27 mm[.05 in]
Connector Width	9.6 mm[.378 in]
Connector Height	3.85 mm[.151 in]
Connector Length	17.78 mm[.7 in]
Profile Height from PCB	3.85 mm[.151 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Shielded	No
Circuit Application	Power & Signal

Industry Standards

Compatible With Agency/Standards Products	DIN, UL
Industry Standard	IEC
Compatible With Approved Standards Products	UL
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Reel Diameter	330 mm[12.99 in]
Packaging Quantity	560
Packaging Method	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 494075-E
SMCB 20 M AB VV 7-03 CL * 0007 137 E004

TE Part # 454990-E
SMCQ 20 M AB VV 8-13 CL * H007 137 E005

TE Part # 354081-E
SMCQ 40 F AB VV 7-03 CL * 0007 137 E002

TE Part # 354080-E
SMCQ 32 F AB VV 7-03 CL * 0007 137 E002

TE Part # 254415-E
SMCQ 20 M AB VV 8-23 CL * H007 137 E005


TE Part # 354095-E
SMCB 20 M AB VV 7-03 CL * 0007 137 E004

TE Part # 494399-E
SMCB 20 M AB VV 7-03 CL * 0007 107 E003


TE Part # 254537-E
SMCQ 20 M AB VV 8-03 CL * H007 137 E005

TE Part # 254588-E
SMCQ 20 M AB VV 8-13 CL * H007 137 E005

Also in the Series | ERNI SMC

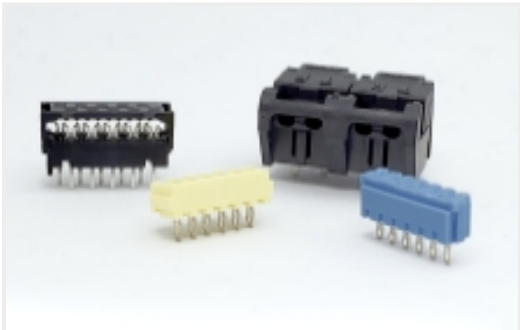


Board-In Connectors(6)

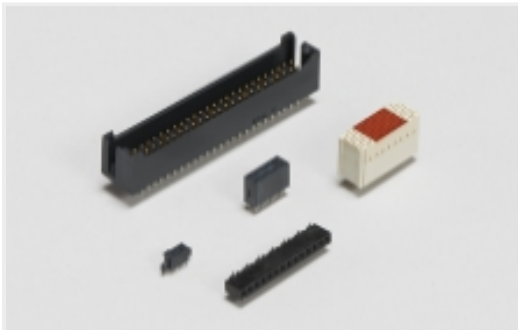

Board-to-Board Headers & Receptacles(81)



Connector Adapters & Connector Savers(45)

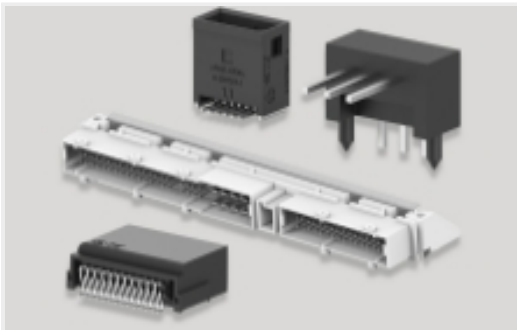

PCB Headers & Receptacles(81)




Pluggable I/O Cable Assemblies(27)



Rectangular Power Connectors(81)



Wire-to-Board Connector Assemblies & Housings(5)

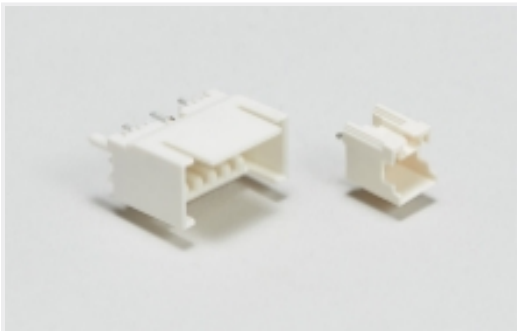

Wire-to-Board Headers & Receptacles (3)


Customers Also Bought



TE Part #4-1624113-5
3650 0805 91nH 5% 2K RL



TE Part #5-1622825-8
RL73K 2A R33 5% 5K RL

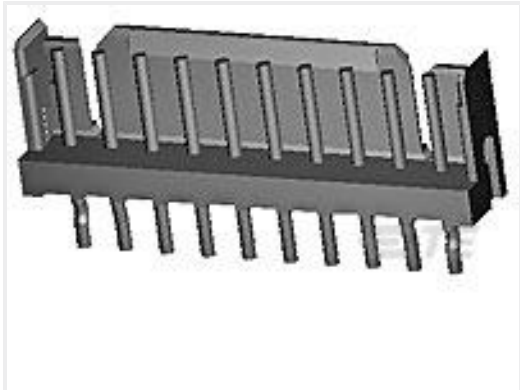

TE Part #1-292161-0
CT P/HDR ASSY V 10P W/KINK NAT



TE Part #1367646-4
Heatsink clip Stamped and Form



TE Part #3-1617031-7
HFW1201L01M = M39016/6-139M



TE Part #2170703-2
CAGE ASSEMBLY, QSFP28 1X1, SPRING



TE Part #1879222-6
CPF 0603 21R5 0.1% 25PPM 1K RL



TE Part #5414907-1
JACK,PCB,75 OHM,NC



TE Part #2-1879220-0
CPF 0603 13K7 0.1% 25PPM 5K RL



TE Part #354095-E
SMCB 20 M AB VV 7-03 CL * 0007 137 E004

Documents



Product Drawings

SMCQ 20 F AB W 7-03 CL * 0007 137 E002

English

SMCQ 20 F AB W 7-03 CL * 0007 137 E002

English

CAD Files

Customer View Model

ENG_CVM_CVM_354079-E_1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_354079-E_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_354079-E_1.3d_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Datasheet - ERNI SMC 1.27mm Connectors

English

Datasheet - ERNI SMC 1.27mm Connectors

Datasheet - ERNI SMC 1.27mm Connectors

German