382811-2 - ACTIVE


AMP

TE Internal #: 382811-2 Economy Shunt, Open Top, 2 Position, 2.54 mm [.1 in] Centerline, Signal, -65 – 105 °C [-85 – 221 °F]

View on TE.com >



Connectors > PCB Connectors > Board-to-Board Connectors > Board-to-Board Jumpers & Shunts

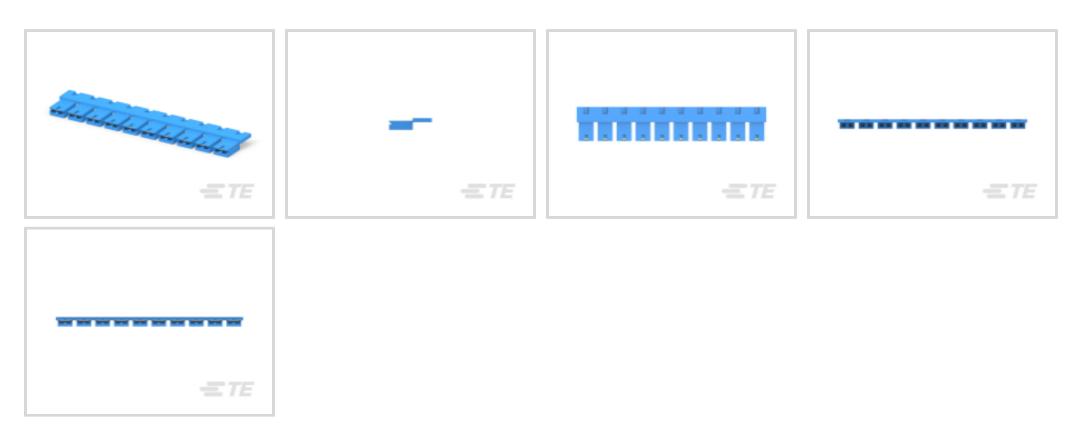

Shunt Type: Economy

Shunt Style: Open Top

Number of Positions: 2

Centerline (Pitch): 2.54 mm [.1 in]

Contact Current Rating (Max): 3A

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board	
Connector System	Board-to-Board	
Configuration Features		
Number of Positions	2	
Electrical Characteristics		
Insulation Resistance	1000 MΩ	
Body Features		
Primary Product Color	Blue	
Handle	Without	
Contact Features		
Contact Mating Area Plating Material	Gold (Au)	
Contact Base Material	Phosphor Bronze	
Contact Mating Area Plating Material Thickness	.381 μm[15 μin]	
Shunt Type	Economy	

C For support call+1 800 522 6752

382811-2

Economy Shunt, Open Top, 2 Position, 2.54 mm [.1 in] Centerline, Signal, -65 – 105 °C [-85 – 221 °F]



Shunt Style	Open Top	
Contact Current Rating (Max)	3 A	
Housing Features		
Housing Material	Polyester GF	
Centerline (Pitch)	2.54 mm[.1 in]	
Dimensions		
Product Height	6.35 mm[.25 in]	
Usage Conditions		
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]	
Operation/Application		
Circuit Application	Signal	
Industry Standards		
UL Flammability Rating	UL 94V-0	
Compatible With Approved Standards Products	UL	
Packaging Features		
Jumper & Shunt Packaging	Breakaway Strip of 10 Pieces	
Packaging Method	Box	



Packaging Quantity

1500

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	
Product Compliance Disclaimer		

382811-2

Economy Shunt, Open Top, 2 Position, 2.54 mm [.1 in] Centerline, Signal, -65 – 105 °C [-85 – 221 °F]



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts




Customers Also Bought









ETE		Etter E	=TE
TE Part #1734035-4 MINI USB, TYPE B, R/A, SMT, MYLAR	TE Part #1-2176177-7 CRGH0603 1% 3K3 0.2W	TE Part #146888-1 1FHP,64,30A/P,S,C,S10,12,13,15	TE Part #CAT-AM74-UN384H AMP-LATCH UNIVERSAL HEADERS



382811-2

Economy Shunt, Open Top, 2 Position, 2.54 mm [.1 in] Centerline, Signal, -65 – 105 °C [-85 – 221 °F]





Documents

Product Drawings SHUNT, ECON, PHBR15 AU, BLUE

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_382811-2_P.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_382811-2_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_382811-2_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Low Profile, Economy, and Dual Beam Shunt Connectors 382811, 390088, and 382823

English

Agency Approvals Agency Approval Document

English