




Connectors > Terminal Blocks & Strips > Barrier Strips

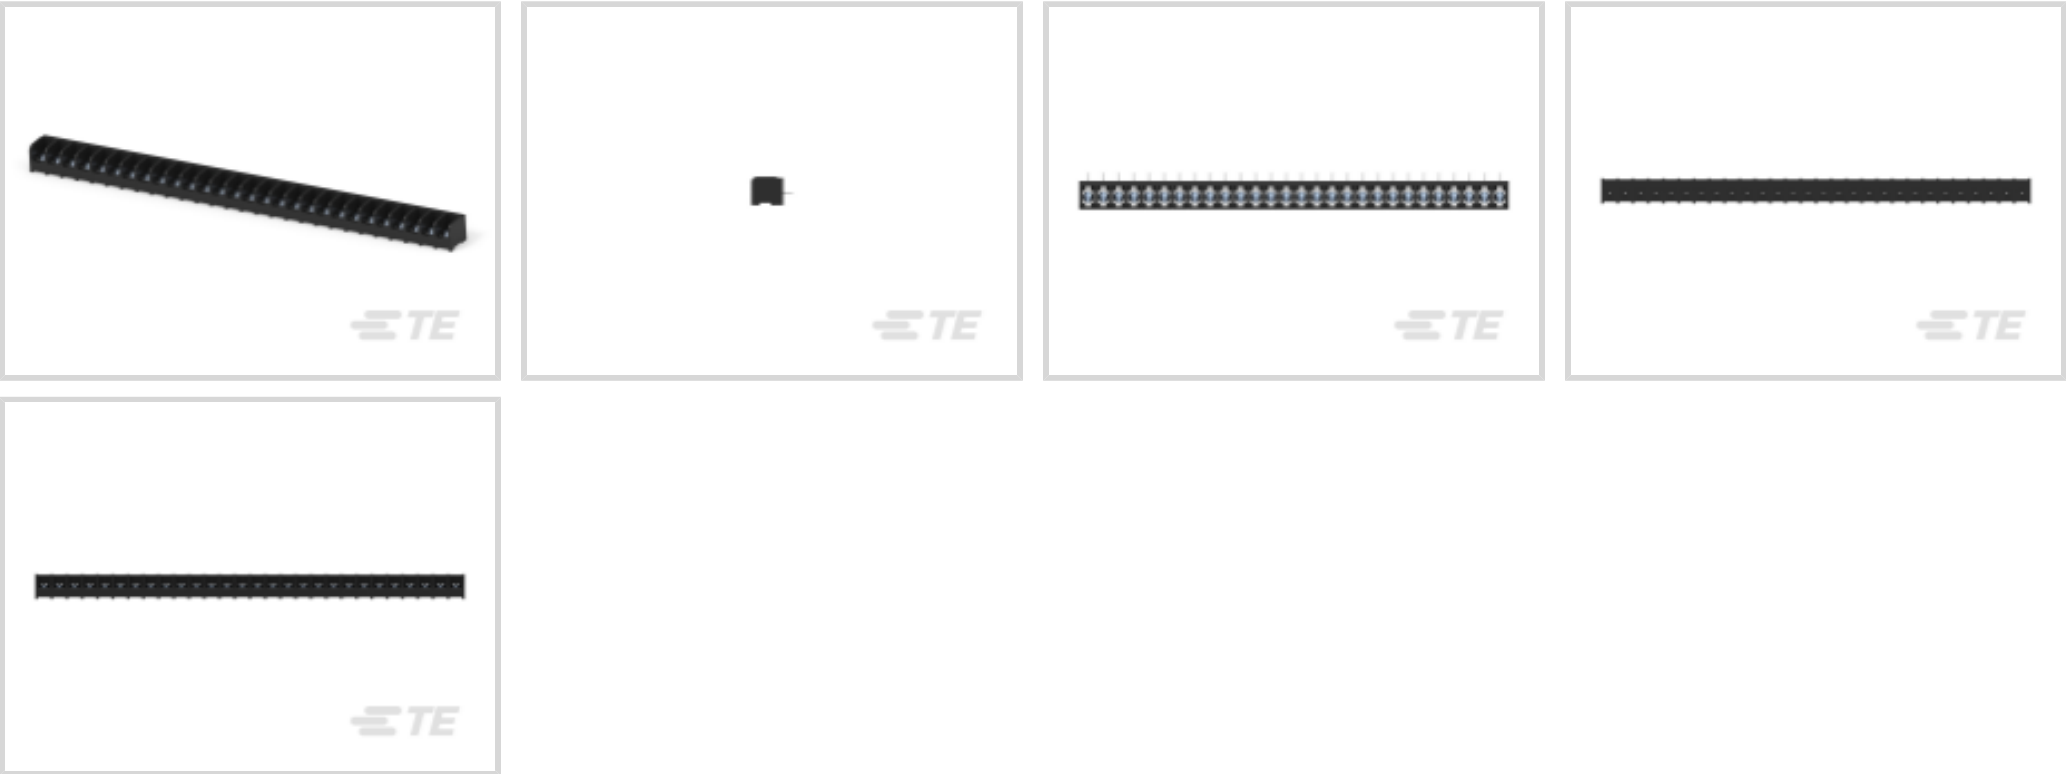

Number of Positions: 28

Barrier Strip Style: Tri-Barrier

Bottom Termination Type: Printed Circuit Pin

Connector System: Wire-to-Board

Centerline (Pitch): 9.53 mm [.375 in]

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Block Style                       | Flat Bottom           |
| Connector System                  | Wire-to-Board         |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

|                     |    |
|---------------------|----|
| Number of Levels    | 1  |
| Number of Positions | 28 |
| Number of Rows      | 1  |

Electrical Characteristics

|                   |       |
|-------------------|-------|
| Operating Voltage | 300 V |
|-------------------|-------|

Body Features

|                       |             |
|-----------------------|-------------|
| Primary Product Color | Black       |
| Product Orientation   | Right Angle |
| Barrier Strip Style   | Tri-Barrier |



Contact Features

|                                               |              |
|-----------------------------------------------|--------------|
| Contact Base Material                         | Copper Alloy |
| PCB Contact Termination Area Plating Material | Tin          |
| Contact Current Rating (Max)                  | 25 A         |

Termination Features

|                         |                     |
|-------------------------|---------------------|
| Bottom Termination Type | Printed Circuit Pin |
|-------------------------|---------------------|

Mechanical Attachment

|                         |                    |
|-------------------------|--------------------|
| Top Termination Type    | Binding Combo Head |
| Mounting Options        | None               |
| Screw Plating Material  | Zinc Chromate      |
| Screw Material          | Steel              |
| Thread Size             | 6-32               |
| Screw Head Type         | Combo Phil-Slot    |
| Connector Mounting Type | Board Mount        |

Housing Features

|                    |                  |
|--------------------|------------------|
| Housing Material   | Thermoplastic    |
| Centerline (Pitch) | 9.53 mm[.375 in] |

Dimensions

|                |                      |
|----------------|----------------------|
| Product Length | 268.25 mm[10.561 in] |
| Wire Size      | 22 – 12 AWG          |

Usage Conditions

|                             |                         |
|-----------------------------|-------------------------|
| Operating Temperature Range | 0 – 105 °C[32 – 221 °F] |
|-----------------------------|-------------------------|

Operation/Application

|                     |       |
|---------------------|-------|
| Circuit Application | Power |
|---------------------|-------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |         |
|--------------------|---------|
| Packaging Method   | Package |
| Packaging Quantity | 50      |

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>




|                                               |                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                      |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                      |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                            |
| Solder Process Capability                     | Wave solder capable to 265°C                                                                                                   |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | BUCHANAN 6 Series

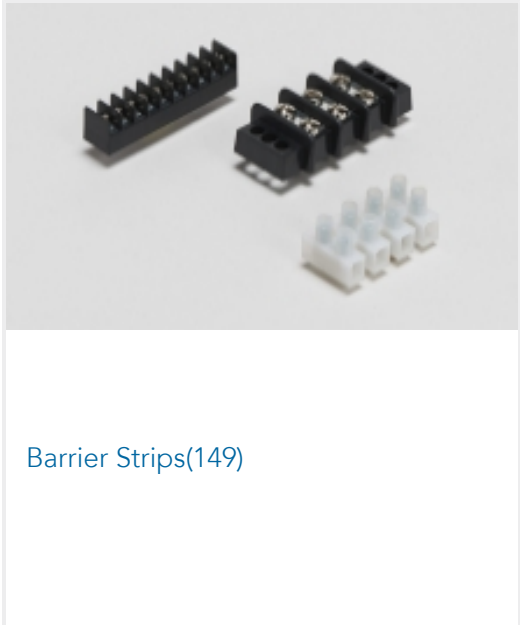

Barrier Strips(149)

Customers Also Bought



Documents

Product Drawings

6PCR-28-007=6PCR ASSEMBLY

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_4-1546158-2\_L.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_4-1546158-2\_L.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_4-1546158-2\_L.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

1-1773458-2\_BARRIER\_STRIPS\_QUICK\_REFERENCE\_GUIDE

English