

SIAMEZE

TE Internal #: 4-1601140-2


Wire-to-Wire, 22 – 18 AWG Lead Wire, .32 – .82 mm² Lead Wire, Insulation Displacement (IDC), Nickel Plating, SIAMEZE, Magnet

Wire Terminals

View on TE.com >



Terminals & Splices > Magnet Wire Terminals

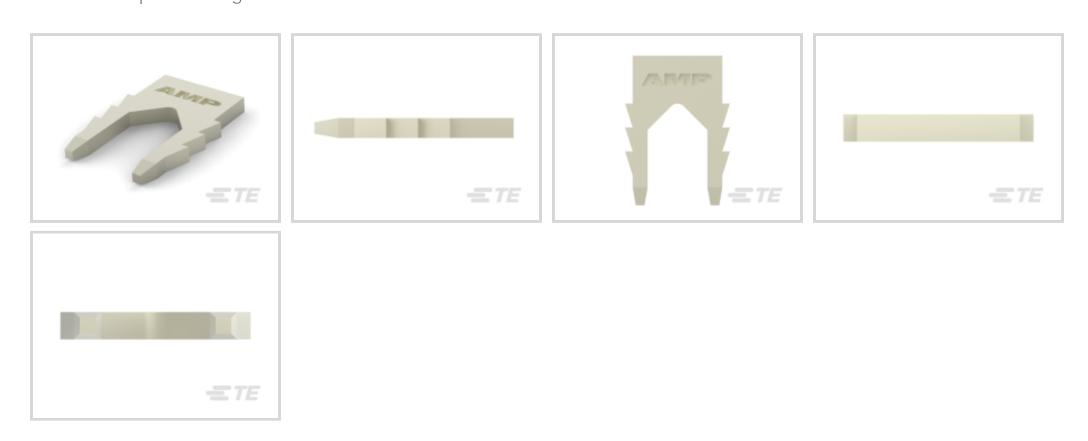

Magnet Wire Terminal Type: Wire-to-Wire

Compatible With Discrete Wire Type

Lead Wire Size: 22 – 18 AWG

Termination Method to Wire & Cable: Insulation Displacement (IDC)

Stock Thickness (Magnet Wire Side): .64 mm [.025 in]

Features

Product Type Features

Contact Features		
Magnet Wire Terminal Type	Wire-to-Wire	
Terminal Plating Material	Nickel	
Terminal Orientation	Straight	
Termination Features		

Solid, Stranded

Insulation Displacement (IDC)

Termination Method to Wire & Cable

Dimensions	
Terminal Height	6.35 mm[.25 in]
Lead Wire Size	22 – 18 AWG
Stock Thickness (Magnet Wire Side)	.64 mm[.025 in]
Product Length	6.35 mm[.25 in]

Usage Conditions

Insulation Option	Uninsulated



Operation/Application

Compatible With Wire Base Material	Copper
Packaging Features	
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | SIAMEZE

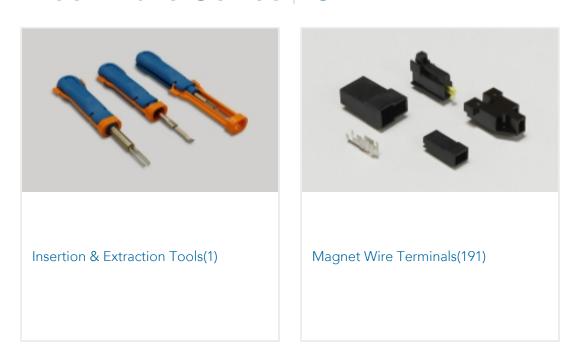

Customers Also Bought



Documents

Product Drawings

LEADLOK STRAIN RELIEF, SMZ

English

CAD Files

Customer View Model

ENG_CVM_CVM_4-1601140-2_F.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_4-1601140-2_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_4-1601140-2_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Magnet Wire Terminals & Splices

English

Product Specifications

Application Specification

Wire-to-Wire, 22 – 18 AWG Lead Wire, .32 – .82 mm² Lead Wire, Insulation Displacement (IDC), Nickel Plating, SIAMEZE, Magnet Wire Terminals



English