

CGS | CGS SQ

TE Internal #: 4-1623795-5

.22 ohm, Through-Hole Power Resistor, Wire Wound, 5 W, 5 %,


±300 ppm/°C, Axial-Leaded, Copper Termination, 22 x 10 x 9 mm,

Loose Piece - Box, CGS SQ

View on TE.com >



Passive Components > Resistors > Through-Hole Resistors > Wirewound Resistor: Horizontal Mount



Resistance Value: $.22 \Omega$

Resistor Type: **Power Resistor**Element Type: **Wire Wound**

Power Rating: 5 W

Resistance Class: Up to $1k\Omega$

All Wirewound Resistor: Horizontal Mount (156)

Features

Product Type Features

Resistor Type	Power Resistor
Element Type	Wire Wound
Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Operating Voltage	350 V
Resistance Value	.22 Ω
Power Rating	5 W
Resistance Class	Up to $1k\Omega$
Passive Component Tolerance	5 %
Body Features	

Lead Type	Axial-Leaded

Termination Features

Termination Area Base Material	Copper
Number of Terminations	2

Dimensions



Passive Component Dimensions	22 x 10 x 9 mm
Usage Conditions	
Operating Temperature Range	-55 – 250 °C
Temperature Coefficient	±300 ppm/°C
Packaging Features	
Packaging Method	Loose Piece - Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | CGS SQ

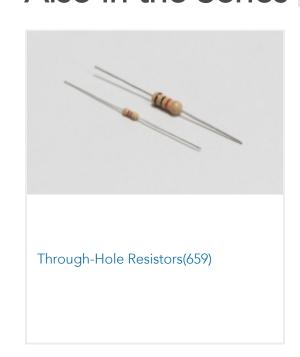

Customers Also Bought





















.22 ohm, Through-Hole Power Resistor, Wire Wound, 5 W, 5 %, \pm 300 ppm/°C, Axial-Leaded, Copper Termination, 22 x 10 x 9 mm, Loose Piece - Box, CGS SQ



Documents

Product Drawings

SQP5 R22 5% WIRE

English

Datasheets & Catalog Pages

4-1773460-6_RESISTIVE_SOLUTIONS_RAIL

English

1309350_PASSIVE_COMPONENT

English

8-1773459-4_POWER_FILTERING_AND_RESISTIVE_SOLUTIONS_FOR_ELEVATORS_AND_ESCALATORS

English

High Power Resistors - Type SQ Series

English