

zQSFP+/QSFP28 TE Internal #: 4-2170754-5 OSFP28/56, Cage Assembly, Sealable, Signal, Operating Temperature Range -40 – 85 °C [-40 – 185 °F], Data Rate (Max) 28 Gb/s, 1 Ports

View on TE.com >

Connectors > Pluggable IO Connectors & Cages



Form Factor: **QSFP28/56** Pluggable I/O Product Type: Cage Assembly Sealable: Yes Circuit Application: Signal Operating Temperature Range: -40 – 85 °C [-40 – 185 °F]

Features

Product Type Features

Cage Type

Thermal Accessory Type Included

Ganged

Heat Sink



Form Factor	QSFP28/56
Pluggable I/O Product Type	Cage Assembly
Sealable	Yes
Configuration Features	
Number of Rear EONs per Port Column	0
Number of Ports	1
Port Matrix Configuration	1 x 1
Electrical Characteristics	
Data Rate (Max)	28 Gb/s
Body Features	
Heat Sink Style	Pin
Heat Sink Finish	Anodized Black
	.256 in
Heat Sink Height Class	SAN
Contact Features	

C For support call+1 800 522 6752

QSFP28/56, Cage Assembly, Sealable, Signal, Operating Temperature Range -40 – 85 °C [-40 – 185 °F], Data Rate (Max) 28 Gb/s, 1 Ports



PCB Contact Termination Area Plating Material	Tin
Termination Features	
Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	2.05 mm[.081 in]
Housing Features	
Cage Material	Nickel Silver
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Pluggable I/O Applications	SFP+ Stacked Belly-to-Belly
Heat Sink Compatible	Yes
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0

Packaging Features

		 .

Packaging Method	Box & Tray
Other	
Included Lightpipe	Yes
EMI Containment Feature Type	Elastomeric Gasket
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900

OSFP28/56, Cage Assembly, Sealable, Signal, Operating Temperature Range -40 – 85 °C [-40 – 185 °F], Data Rate (Max) 28 Gb/s, 1 Ports



ppm.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



 TE Part # 2215047-7
 TE Part # CAT-C11-N490333
 TE Part # CAT-C11-N490325
 TE Part # CAT-C11-N49

 ASSY, STG TL, QSFP28 LP,1X1
 QSFP28-Four SFP+ Cable Assembly:
30 AWG
 QSFP28-Four SFP+ Cable Assembly:
26 AWG
 QSFP28-Four SFP+ Cable Assembly:
26 AWG
 QSFP28-Two QSFP28 Cable
Assembly: 30 AWG






QSFP28/56, Cage Assembly, Sealable, Signal, Operating Temperature Range -40 – 85 °C [-40 – 185 °F], Data Rate (Max) 28 Gb/s, 1 Ports




TE Part # CAT-Q17-N490325 QSFP56 to QSFP56 Cable Assembly: 30 AWG

Also in the Series | zQSFP+/QSFP28

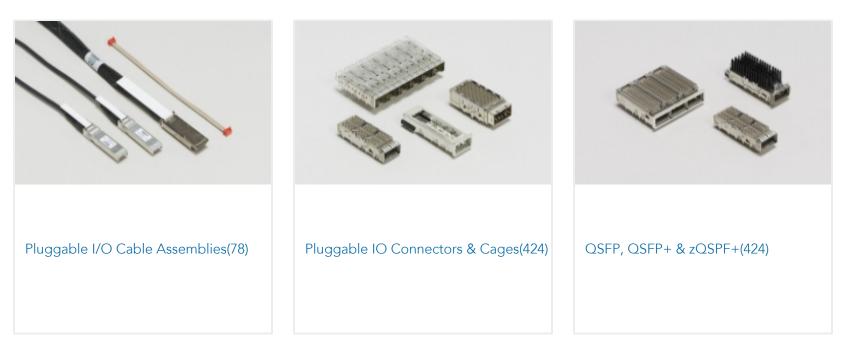

Customers Also Bought



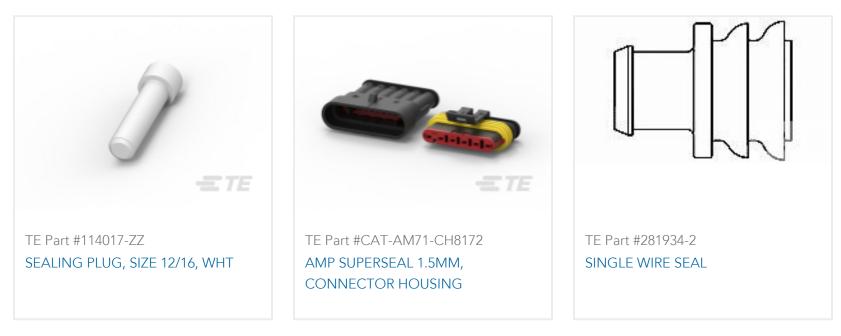

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_4-2170754-5_A.2d_dxf.zip

English

QSFP28/56, Cage Assembly, Sealable, Signal, Operating Temperature Range -40 – 85 °C [-40 – 185 °F], Data Rate (Max) 28 Gb/s, 1 Ports



Customer View Model

ENG_CVM_CVM_4-2170754-5_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_4-2170754-5_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages QSFP28/56 and zQSFP+ Interconnects

English

Product Specifications

Product Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English