4-2213480-1 - ACTIVE

LUMAWISE | LUMAWISE LED Holders

TE Internal #: 4-2213480-1 Optic Compatible / Zhaga Inspired, 60 VDC, Poke-In, 1 Position, Printed Circuit Board, -40 – 105 °C [-40 – 221 °F], LUMAWISE LED Holders, LED Holders

View on TE.com >

Connectors > Lighting Connectors > LED Holders



Lighting Connector Features Included: Optic Compatible, Zhaga Inspired

Operating Voltage: 60 VDC

Termination Method to Wire & Cable: Poke-In

Number of Positions: 1

Connector & Contact Terminates To: Printed Circuit Board

Features



Product Type Features

Electrical Characteristics					

C For support call+1 800 522 6752

4-2213480-1

Optic Compatible / Zhaga Inspired, 60 VDC, Poke-In, 1 Position, Printed Circuit Board, -40 – 105 °C [-40 – 221 °F], LUMAWISE LED Holders, LED Holders



Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]					
Operation/Application						
Circuit Application	Power					
Product Compliance For compliance documentation, visit the product page on TE.com>						
EU RoHS Directive 2011/65/EU	Compliant					
EU ELV Directive 2000/53/EC	Compliant					
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold					
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC					
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free					
Solder Process Capability	Not reviewed for solder process capability					

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



4-2213480-1

Optic Compatible / Zhaga Inspired, 60 VDC, Poke-In, 1 Position, Printed Circuit Board, -40 – 105 °C [-40 – 221 °F], LUMAWISE LED Holders, LED Holders






Also in the Series | LUMAWISE LED Holders



Customers Also Bought

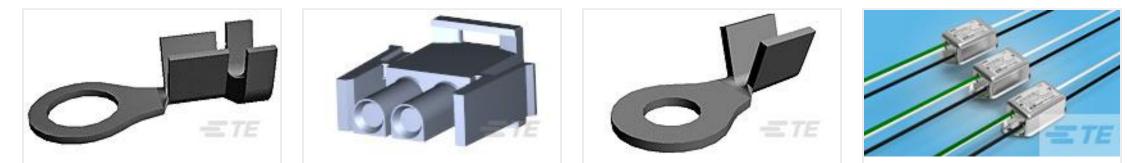

TE Part #60433-2TE Part #794814-1TE Part #42111-2TE Part #9-1609095-0RING CRIMP 18-14 AWG TPBR02P UMNL PLUG HSG,HI TEMPRING TONGUE TERMINAL 18-143FB3=F8362AWG TPBRAWG TPBR				RING TONGUE TERMINAL 18-14		
---	--	--	--	----------------------------	--	--





4-2213480-1

Optic Compatible / Zhaga Inspired, 60 VDC, Poke-In, 1 Position, Printed Circuit Board, -40 – 105 °C [-40 – 221 °F], LUMAWISE LED Holders, LED Holders



Documents

Product Drawings LUMAWISE Z50 HOLDER 2828 LEDIL

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_4-2213480-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_4-2213480-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_4-2213480-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages LUMAWISE LED HOLDERS + LEDiL ELISE REFLECTORS

English

LUMAWISE TYPE Z LED HOLDERS

English

Product Specifications Application Specification

English