# 413524-5 - ACTIVE

TE Internal #: 413524-5 BNC Connector, Jack, 50 ohm, Bayonet, 1 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount, -55 – 85 °C [-67 – 185 ° F], Zinc, Nickel

## View on TE.com >

connectivity

Connectors > RF Connectors > Coax Connectors



RF Interface: BNC

RF Connector Style: Jack

RF Connector Mated Outer Diameter (Approximate): 14.53 mm [.572 in ]

Impedance:  $50 \Omega$ 

RF Connector Coupling Mechanism: Bayonet

## Features

## Product Type Features

RF Interface	BNC
RF Connector Style	Jack
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Right Angle
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
Impedance	50 Ω
Body Features	
Body Material	Zinc
Body Plating Material	Nickel

BNC Connector, Jack, 50 ohm, Bayonet, 1 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount, -55 – 85 °C [-67 – 185 °F], Zinc, Nickel



## **Contact Features**

RF Connector Center Contact Underplating Material	Nickel
	889 µin
RF Connector Center Contact Plating Material	Gold (Au)
RF Connector Center Contact Material	Phosphor Bronze
Termination Features	
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	4 mm[.157 in]
Mechanical Attachment	
Panel Mount Feature Type	Lockwasher and Nut
PCB Mount Retention	With
RF Connector Coupling Mechanism	Bayonet
Connector Mounting Type	Panel Mount
RF Contact Captivation Method	Mechanical
Detent	With
Dimensions	

Mounting Post Length

## 2.79 mm[.11 in]

Profile Height from PCB	15.88 mm[.625 in]
RF Connector Mated Outer Diameter (Approximate)	14.53 mm[.572 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Operating Frequency	1 GHz
Packaging Features	
Packaging Method	Tube
Other	
Grade	Commercial
Dielectric Material	Polymethylpentene

## Product Compliance

For compliance documentation, visit the product page on TE.com>

BNC Connector, Jack, 50 ohm, Bayonet, 1 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount, -55 – 85 °C [-67 – 185 °F], Zinc, Nickel



EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**






# Customers Also Bought

BNC Connector, Jack, 50 ohm, Bayonet, 1 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount, -55 – 85 °C [-67 – 185 °F], Zinc, Nickel



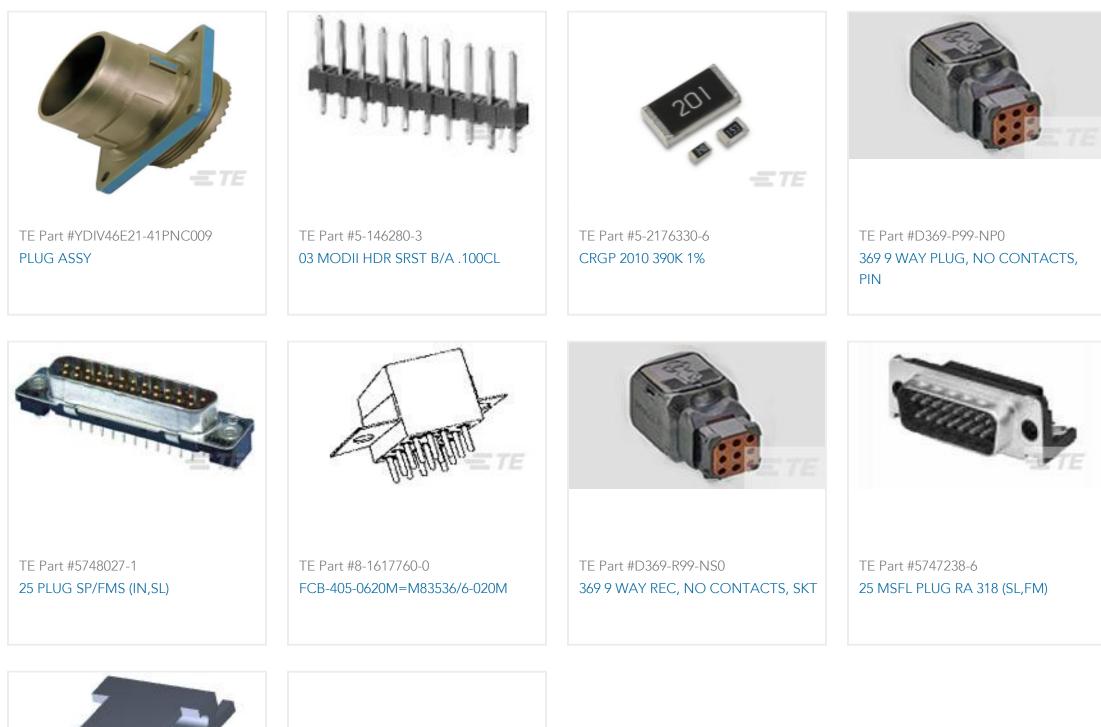



## Documents

Product Drawings JACK DECOUPLER PCB RTANG

English

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_413524-5\_AC.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_413524-5\_AC.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_413524-5\_AC.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**C** For support call+1 800 522 6752

BNC Connector, Jack, 50 ohm, Bayonet, 1 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount, -55 – 85 °C [-67 – 185 °F], Zinc, Nickel



PCB Decoupled BNC Straight & Right Angle Jacks

English

**Product Specification** 

English