




Terminals & Splices > Quick Disconnects

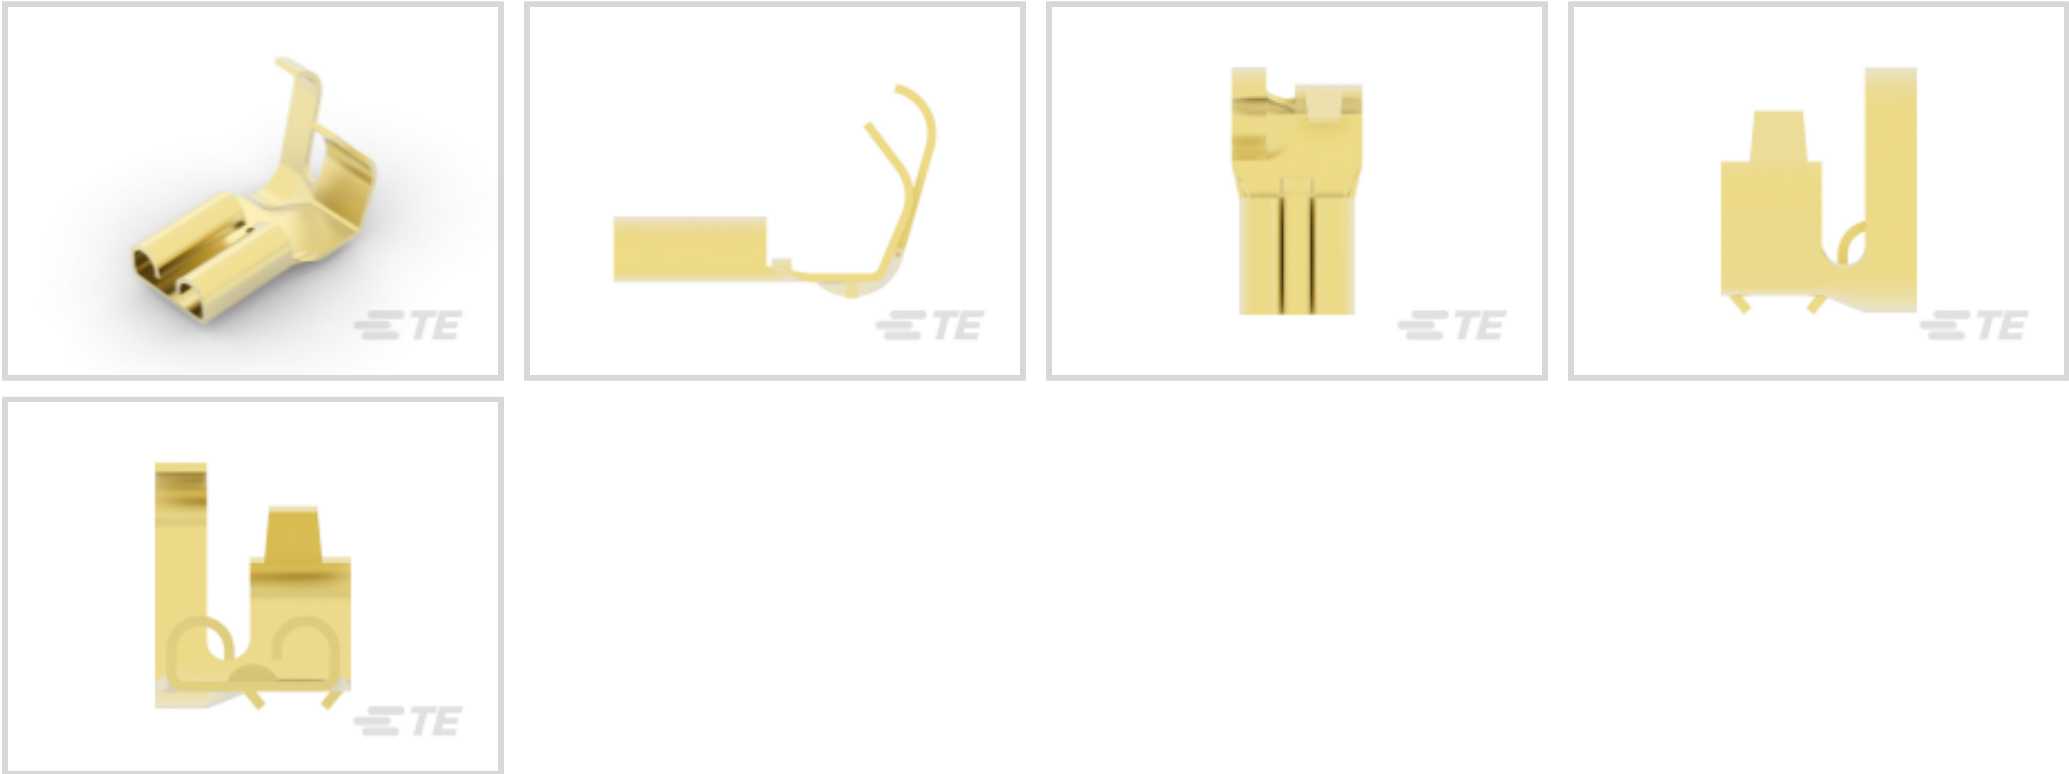

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 3.31 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Flag
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	Tab-Lok
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	17.02 mm[.67 in]
Compatible Insulation Diameter Range	2.79 – 5.33 mm[.11 – .21 in]
Terminal Material Thickness	.43 mm[.017 in]
Wire Size	.82 – 3.31 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	4000
Packaging Method	Strip/Reel

Other

Line	Premier
------	---------

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability





Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

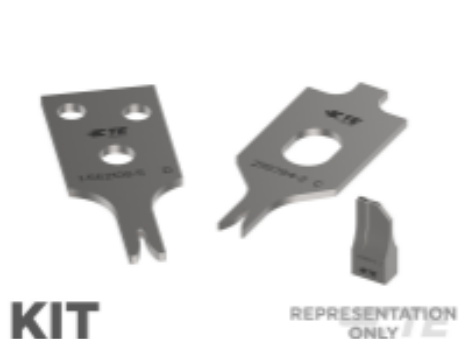 KIT REPRESENTATION ONLY TE Part # 7-1855041-7 SPARE PART KIT	 TE Part # 1596697-5 HB APPL,AOM	 TE Part # 2088156-2 MINI APPLICATOR, HINGE BAR END FEED	 TE Part # 1596696-2 HB APPL,AOL
 TE Part # 1852633-1 EAPOHB160TABLOCK1800 LM/G-HINGE BAR	 TE Part # 2232111-2 250 FASTON,FLAG,REC.,12-20 AWG, BR	 TE Part # 1855041-1 HINDGE BAR F.A. EMPO160TAB1800 LM & G	

Also in the Series | FASTON 250

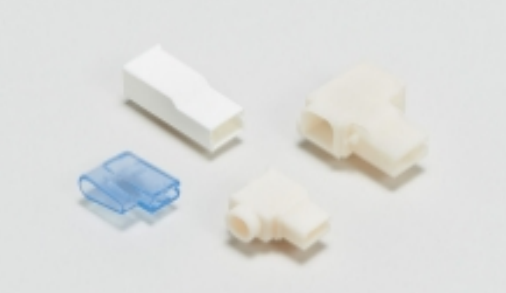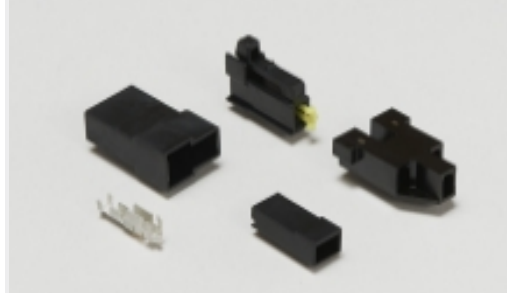 Compression Connectors(4)	 Crimp Terminal Housings(116)	 Insulation Boots & Sleeves(16)	 Magnet Wire Terminals(1)
--	--	---	---



PCB Terminals(134)



Quick Disconnects(421)




Splices(4)


Customers Also Bought



TE Part #520971-1
ULTRA-POD 250 ASY REC 18-14 AWG
BR

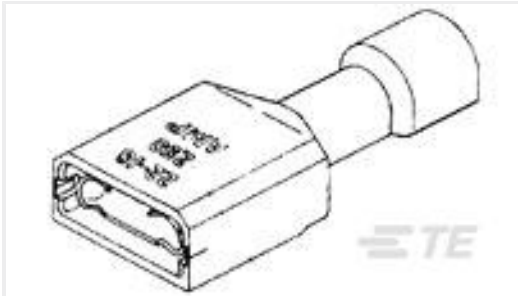

TE Part #3-520140-4
ULTRA-FAST 250 ASY REC 16-14 AWG
TPBR

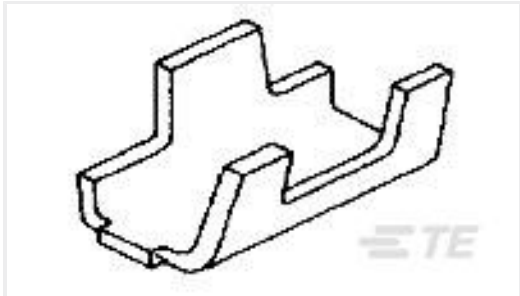

TE Part #41276
IDENTIFICATION BAND AL




TE Part #521282-1
ULTRA-POD 250 ASS REC 18-14 AWG
BR LIF



TE Part #NB15794001
RNF-150-3/8-0-SP



TE Part #CAT-UL8-2502
ULTRA POD: Straight, Receptacle
Assembly, Unplated, .250 inch

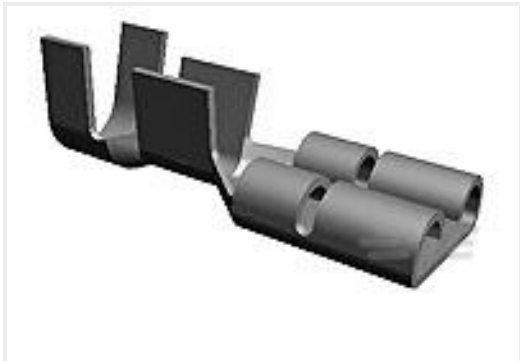

TE Part #63306-1
250 FASTON REC 18-14 AWG BR



TE Part #42486-2
187 FASTON FLAG REC 20-16 AWG
TPBR



TE Part #1742583-1
FASTON 312 TAB NPST

Documents

Product Drawings

250 FASTON FLAG REC 18-12 AWG BR

English

CAD Files

Customer View Model

ENG_CVM_CVM_41531_DW.2d_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG_CVM_CVM_41531_DW.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_41531_DW.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[82004 FASTON Terminals \(Insulated and Uninsulated\) Catalog - FASTON Receptacles Section](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[Agency Approval Document](#)

English