



SPLICE

TE Internal #: 42329-1  
Pigtail Splice / Thru Splice, 3200 – 3900 CMA, Steel, 0 Serration,  
3.81 mm [.15 in] Length, Reel, Open Barrel, Solid / Stranded Wire,  
SPLICE

[View on TE.com >](#)

Terminals & Splices > Splices



Splice Type: **Pigtail Splice, Thru Splice**  
Sealable: **No**  
Wire Size: **3200 – 3900 CMA**  
Contact Base Material: **Steel**  
Terminal Material Thickness: **.3 mm [.012 in]**

Features

Product Type Features

Splice Type	Pigtail Splice, Thru Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Number of Serrations	0
Compatible With Wire & Cable Type	Discrete Wire

Body Features

Product Weight	.089 g
----------------	--------

Contact Features

Contact Base Material	Steel
Barrel Type	Open

Mechanical Attachment

--	--



Wire Insulation Support	Without
-------------------------	---------

Dimensions

Wire Size	3200 – 3900 CMA
Terminal Material Thickness	.3 mm[.012 in]
Product Length	3.81 mm[.15 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 250 °C[-40 – 482 °F]

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Packaging Features

Packaging Quantity	33000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


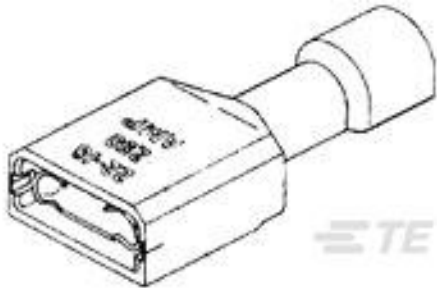


Compatible Parts



 <p>TE Part # 61021-1 SPLICE 18-16 AWG .0126 NPST</p>	 <p>TE Part # 42627-4 SPLICE 3232-8282 .0198 NPST</p>	 <p>TE Part # 2150684-1 OCEAN_2.0_Applicator-E-100F-REM</p>	 <p>TE Part # 41627-1 SPLICE 4000-10000 .025 ST</p>
 <p>TE Part # 7-2150684-7 OCEAN_2.0_SPARE_PART_KIT-100F</p>	 <p>TE Part # 2150684-2 OCEAN_2.0_Applicator-E-100F-REA</p>	 <p>TE Part # 61008-1 SPLICE 18-16 AWG .0158 TPST</p>	 <p>TE Part # 60933-2 SPLICE 2200-2900 .012 TPST</p>

Also in the Series | SPLICE

 <p>Crimp Wire Pins, Tabs &amp; Ferrules(1)</p>	 <p>Splices(63)</p>
--	---

Customers Also Bought

 <p>TE Part #1-1703061-2 PLUG, 2 CIRCUIT , UNIVERSAL MATE-N-LOK</p>	 <p>TE Part #3-520140-2 ULTRA-FAST 250 ASY REC 16-14 AWG TPBR</p>	 <p>TE Part #794991-1 02P UMNL BLACK INTERFACE SEAL</p>	 <p>TE Part #1375819-1 CST-100 II CONTACT TIN PLT</p>
--	--	--	--

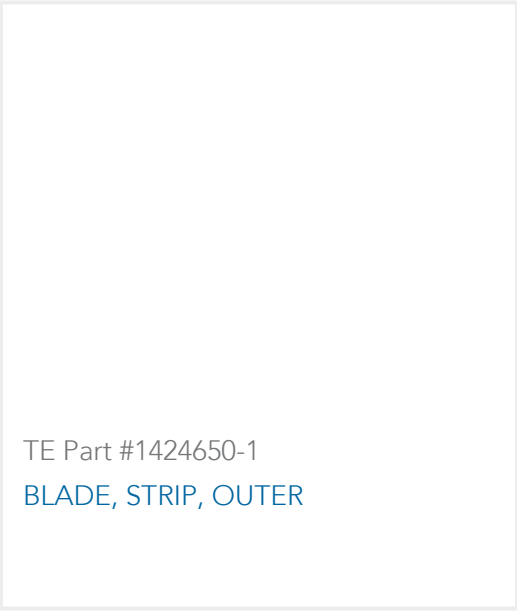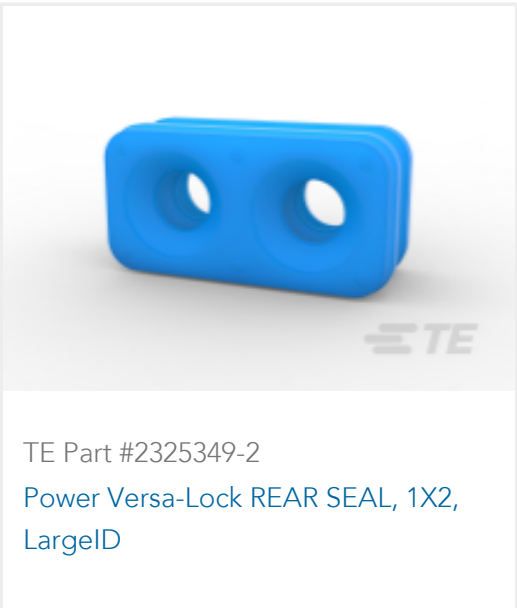

Documents

Product Drawings

SPLICE 1200-2600 .012 NPST

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_42329-1\_J\_c-42329-1-j.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_42329-1\_J\_c-42329-1-j.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_42329-1\_J\_c-42329-1-j.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English