#### **SPLICE**

TE Internal #: 42627-4

Pigtail Splice, 15 – 11 AWG, 1.62 – 4.56 mm<sup>2</sup> Wire, 3 Splice Capacity, 3200 – 8200 CMA, Steel, 0 Serration, 9.4 mm [.37 in]

Length, Strip, SPLICE

View on TE.com >



Terminals & Splices > Splices











Splice Type: **Pigtail Splice**Wire Size: 1.62 – 4.56 mm²

Sealable: **No**Splice Capacity: **3** 

### **Features**

### Product Type Features

Splice Type	Pigtail Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Insulation Support

### **Configuration Features**

Strip Orientation	End Feed
Splice Capacity	3
Number of Serrations	0
Compatible With Wire & Cable Type	Discrete Wire

#### **Electrical Characteristics**

Operating Voltage	250 V
-------------------	-------

#### **Contact Features**

Terminal Plating Material	Nickel
Contact Base Material	Steel



Barrel Type	Open
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	3200 – 8200 CMA
Compatible Insulation Diameter Range	4.06 mm[.16 in]
Terminal Material Thickness	.51 mm[.02 in]
Product Length	9.4 mm[.37 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 – 250 °C[-40 – 482 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Method	Strip

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**






















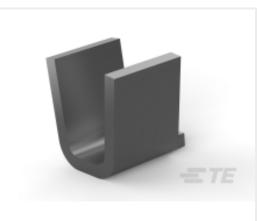

TE Part # 60932-2 SPLICE 2500-4700 .020 TPST












## Also in the Series | SPLICE

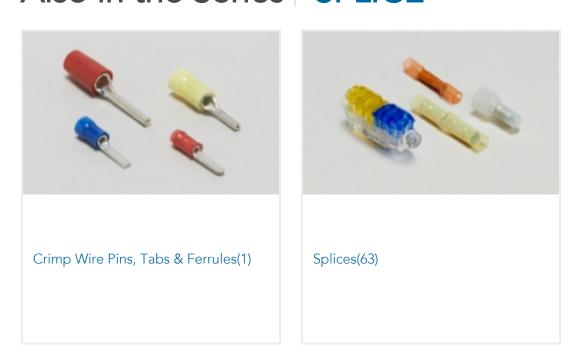

# Customers Also Bought





















### **Documents**

Product Drawings
SPLICE 3232-8282 .0198 NPST

English

**CAD Files** 

3D PDF

3D



**Customer View Model** 

ENG\_CVM\_CVM\_42627-4\_R.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_42627-4\_R.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_42627-4\_R.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**Application Specification** 

English