




Connectors > Contacts > Connector Contacts > FFC Connector Pin Contacts, 1.27 mm

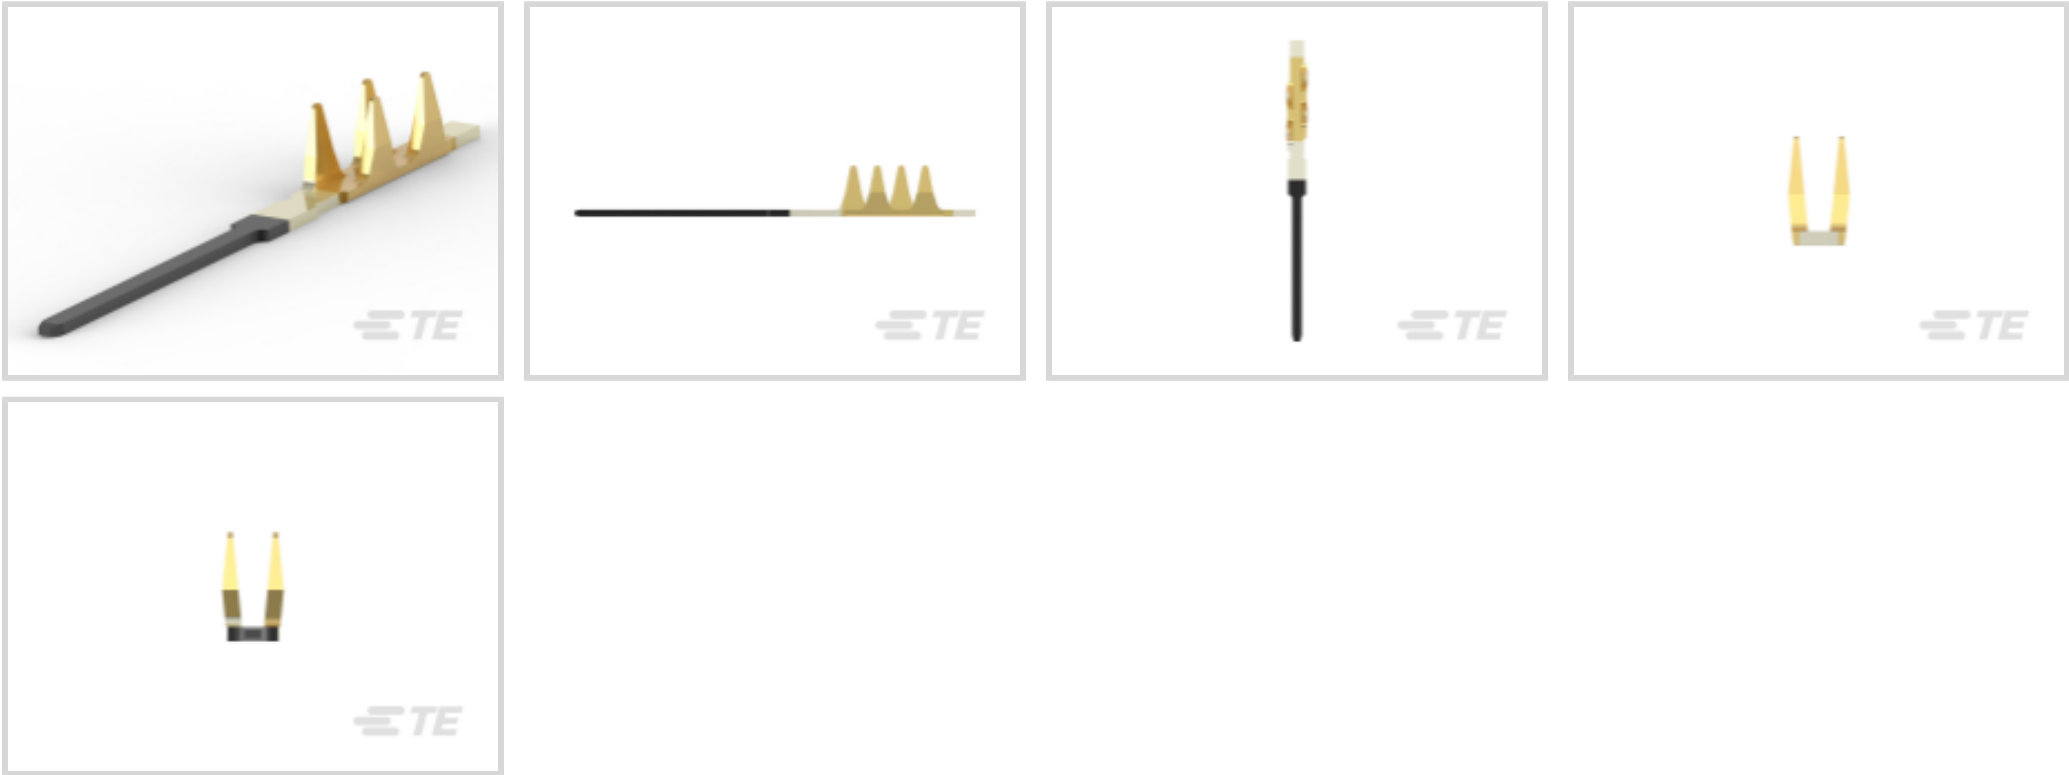

Contact Type: **Pin**

Contact Mating Area Plating Material: **Tin (Sn)**

Compatible With Wire & Cable Type: **FFC**

Termination Method to Wire & Cable: **Solder Tab**

Contact Base Material: **Phosphor Bronze**

[All FFC Connector Pin Contacts, 1.27 mm \(8\)](#)

Features

Configuration Features

Compatible With Wire & Cable Type	FFC
-----------------------------------	-----

Contact Features

PCB Contact Termination Area Plating Material	Gold Flash
Contact Mating Area Plating Material Thickness	2.54 µm
Contact Type	Pin
Contact Mating Area Plating Material	Tin (Sn)
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	1.5 A

Termination Features

Termination Method to Wire & Cable	Solder Tab
Product Terminates To	Wire & Cable

Dimensions

Accepts Conductor Width	.66 mm
-------------------------	--------



Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Packaging Features

Packaging Method	Reel
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought



Documents

Product Drawings

FFC,SLDR TAB CONTACT,.050" CNT

English

CAD Files

Customer View Model

ENG_CVM_CVM_487923-4_S.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_487923-4_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_487923-4_S.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMPMODU_INTERCONNECTION_SYSTEM_SECTION3AND4

English

Product Specifications

Application Specification

English

487923-4

Pin Contact, Tin (Sn), FFC, Solder Tab, Phosphor Bronze, Signal, -55 – 105 °C [-67 – 221 °F]

