




Connectors > Contacts > Connector Contacts

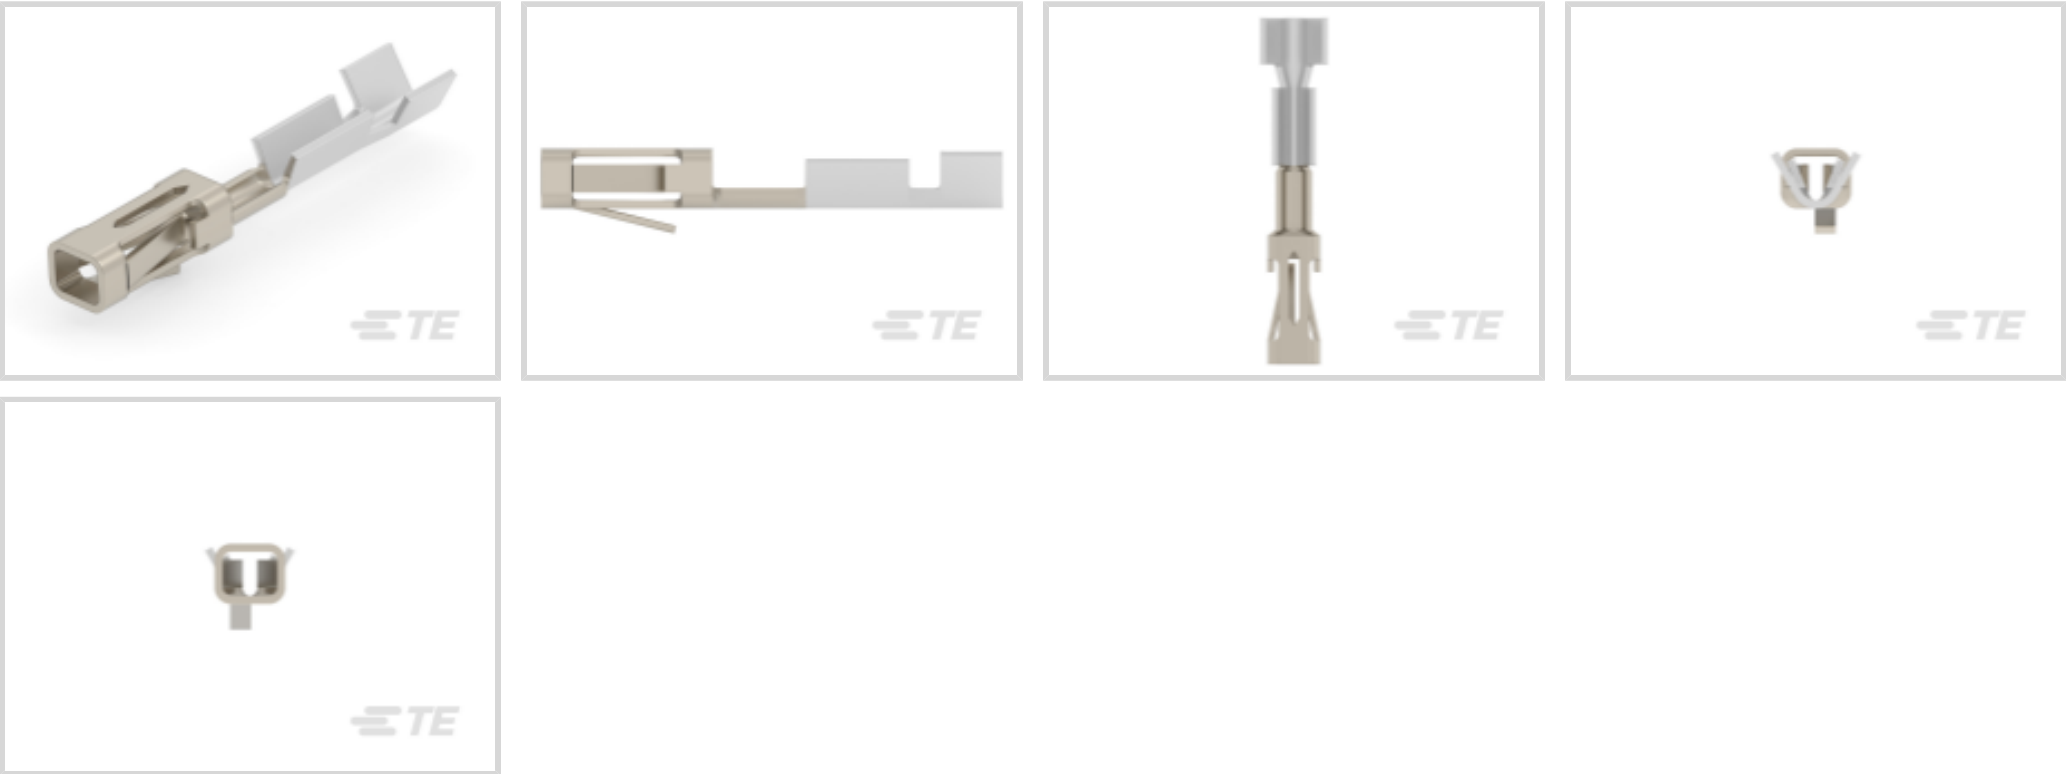

Contact Type: **Socket**

Contact Mating Area Plating Material: **Gold (Au)**

Wire Contact Termination Area Plating Material: **Tin**

Operating Voltage: **250 VAC**

Compatible With Wire & Cable Type: **Discrete Wire**

Features

Product Type Features

Applied Pressure	Standard
------------------	----------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Electrical Characteristics

Termination Resistance	12 mΩ
Dielectric Withstanding Voltage (Max)	750 V
Insulation Resistance	5000 MΩ
Operating Voltage	250 VAC

Contact Features

	100 – 200 μin
Mating Square Post Dimension	.64 mm[.025 in]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Type	Socket
Contact Mating Area Plating Material	Gold (Au)



Wire Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Tin Phosphor Bronze
Contact Current Rating (Max)	3 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Wire Size	59.2 – 197.35 CMA
-----------	-------------------

Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Approved Standards Products	CSA LR7189, UL E28476
---	-----------------------

Packaging Features

Packaging Method	Reel
Packaging Quantity	12500

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 91541-1
CCII MOD IV 1 2 REC 32-27 ASSY

TE Part # 7-2836135-7
OCEAN_2.0_SPARE_PART_KIT-033F0550

TE Part # 843996-3
TOOL, EXTRACTION RESET

TE Part # 2836135-2
OCEAN_2.0_APPLICATOR-S-033F0550A-SSA

Also in the Series | AMPMODU IV/V

Board-to-Board Headers & Receptacles(517)

Connector Caps & Covers(11)

Connector Contacts(270)

Connector Hardware(10)

Power Contacts(206)


Rectangular Connector Housings(5)

Standard Rectangular Connectors(8)


Wire-to-Board Connector Assemblies & Housings(393)

Customers Also Bought






TE Part #L9000161-01
Antenna uSP PCB RPC 916MHz SMT
T&R

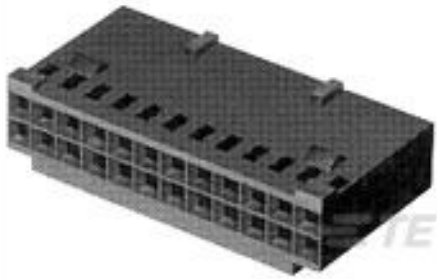

TE Part #87631-8
12 MODIV HSG DR MKRD .100 POL

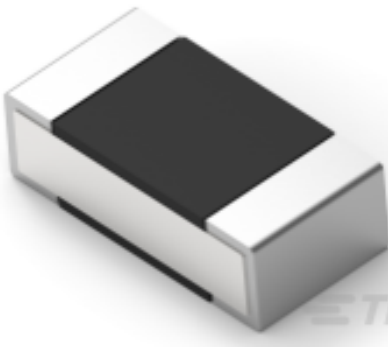

TE Part #5-2176307-4
RP 1E 0.1W 44K2 0.1% 25PPM 5K RL



TE Part #6609054-2
3EHQ3=F7672 S0




TE Part #1393212-3
T92S7A22-208



TE Part #5786676-1
6 CIRC DIN RCPT W/GRND FINGERS




TE Part #4-1879128-1
RN 0402 750R 0.1% 10PPM 1K RL



TE Part #8-1879135-8
RN 0603 9R53 0.1% 10PPM 5K RL



TE Part #5-534978-3
20 MODII 2PC HDR DR W/HLDWN,
ROHS

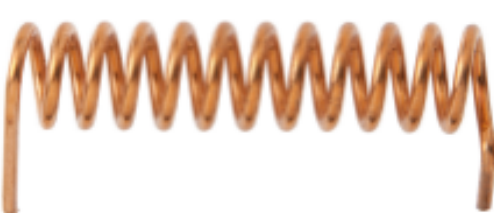

TE Part #ANT-418-HESM
Antenna 1/4 Wave Coil 418MHz SMT

Documents

Product Drawings

MOD IV RECP PLAD 30 DPLX LF

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-102316-8_AF_c-5-102316-8-af.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-102316-8_AF_c-5-102316-8-af.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-102316-8_AF_c-5-102316-8-af.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



AMP MODU IV & V Section of Catalog 1307819

English

AMPMODU_INTERCONNECTION_SYSTEM_SECTION5_CONT

English

1-1773720-9_AMPMODU_MOD_IV_V_QRG

English

Product Specifications

Application Specification

English