

#### AMPMODU

TE Internal #: 5-102694-1 Connector Assembly, Receptacle, Insulation Displacement (IDC), Wire-to-Board, Gold (Au), High, Rectangular Wire & Cable Connectors & Housings

#### View on TE.com >





# Connector Product Type: Connector Assembly

Connector & Housing Type: Receptacle

Mating Alignment: With

Mating Alignment Type: Polarization

Mating Retention: Without

## Features

## Product Type Features

Compatible With Discrete Wire Type

Connector Product Type

Connector & Housing Type

Stranded

Connector Assembly

Receptacle



Connector System	Wire-to-Board
Insertion Force Type	High
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Cavities	6
Contacts Preloaded	Yes
Number of Positions	6
Number of Rows	2
Electrical Characteristics	
Operating Voltage	250 VAC
Body Features	
Primary Product Color	Black
Contact Features	
Contact Underplating Material	Nickel

Connector Assembly, Receptacle, Insulation Displacement (IDC), Wire-to-Board, Gold (Au), High, Rectangular Wire & Cable Connectors & Housings



Wire Contact Termination Area Plating Material	Tin
Contact Layout	Matrix
Contact Type	Socket
Contact Mating Area Plating Material	Gold (Au)
Contact Retention Within Housing	With
Contact Current Rating (Max)	3 A
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Mechanical Attachment	
Contact Retention Type Within Housing	Locking Lance
Mating Alignment	With
Mating Alignment Type	Polarization
Mating Retention	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT
Centerline (Pitch)	2.54 mm[.1 in]

## Dimensions

Row-to-Row Spacing	2.54 mm[.1 in]
Compatible Insulation Diameter (Max)	1.27 mm[.05 in]
Connector Width	15.24 mm[.6 in]
Connector Height	6.1 mm[.24 in]
Wire Size	26 – 22 AWG
Connector Length	7.62 mm[.3 in]
Usage Conditions	
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
Operating Temperature Range Operation/Application	-65 – 105 °C[-85 – 221 °F]
	-65 – 105 °C[-85 – 221 °F] No
Operation/Application	
Operation/Application Shielded	No
Operation/Application Shielded Circuit Application	No

Connector Assembly, Receptacle, Insulation Displacement (IDC), Wire-to-Board, Gold (Au), High, Rectangular Wire & Cable Connectors & Housings



Compatible With Agency/Standards Products	CSA, UL	
UL Rating	Recognized	
Compatible With Approved Standards Products	UL E28476	
CSA Rating	LR 7189	
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Quantity	410	
Packaging Method	Tray	
Product Compliance		
For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247)	

#### Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Candidate List Declared Against: JAN 2025

Does not contain REACH SVHC

(247)

Not applicable for solder process capability

#### Solder Process Capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**

Connector Assembly, Receptacle, Insulation Displacement (IDC), Wire-to-Board, Gold (Au), High, Rectangular Wire & Cable Connectors & Housings





## Customers Also Bought

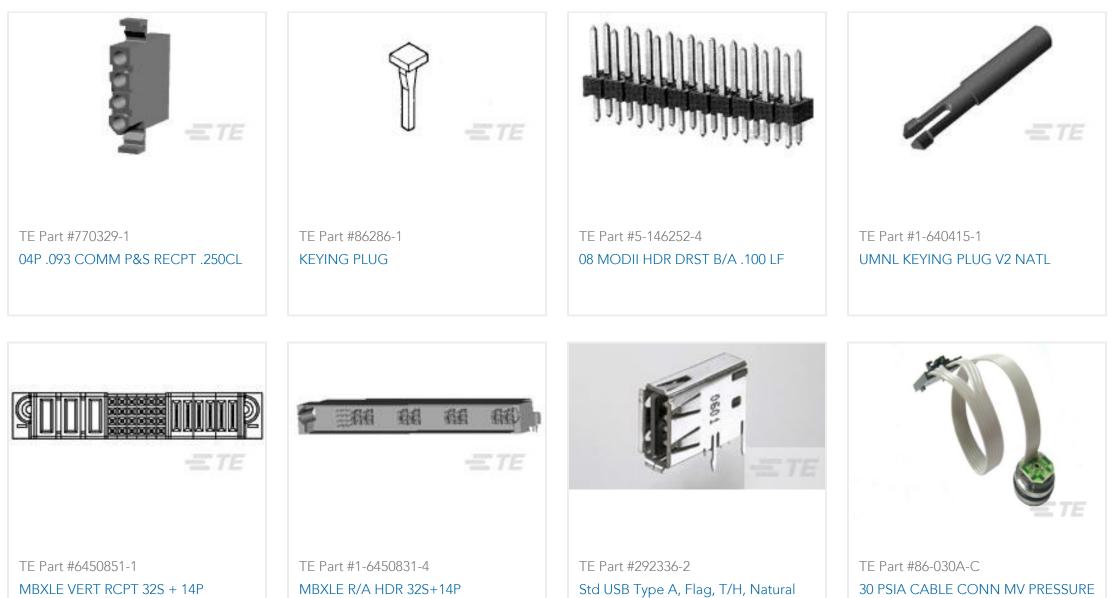

MBXLE VERT RCPT 32S + 14P	MBXLE R/A HDR 32S+14P	Std USB Type A, Flag, T/H, Natural	30 PSIA CABLE CONN MV PR
			SENSOR



## Documents

Product Drawings

06 ampmodu mt assy dr.sn

English

## CAD Files

## 3D PDF

English

Customer View Model

ENG\_CVM\_5-102694-1\_P.2d\_dxf.zip

Connector Assembly, Receptacle, Insulation Displacement (IDC), Wire-to-Board, Gold (Au), High, Rectangular Wire & Cable Connectors & Housings



English

Customer View Model ENG\_CVM\_5-102694-1\_P.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_5-102694-1\_P.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages AMPMODU\_INTERCONNECTION\_SYSTEM\_SECTION5\_CONT

English

Product Specifications Application Specification

English