



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.51 – 1.65 mm²**

Mating Tab Width: **4.75 mm [.187 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple
Extraction Force	7.1 kgf

Dimensions

Product Length	15 mm[.59 in]
Compatible Insulation Diameter Range	2.3 – 3.3 mm[.09 – .13 in]
Terminal Material Thickness	.3 mm[.012 in]
Wire Size	.51 – 1.65 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	12000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2276203-1
Mini Applicator-LP



TE Part # 2150081-1
OCEAN_2.0_APPLICATOR-E-090F130F-REM



TE Part # 7-2150081-7
OCEAN_2.0_SPARE_PART_KIT-090F130F



TE Part # 2150081-2
OCEAN_2.0_APPLICATOR-E-090F130F-REA




TE Part # 7-2276203-7
KIT FOR APPLICATOR



TE Part # 6-160429-2
187 FASTON REC 17-14 AWG TPBR

Also in the Series | FASTON 187

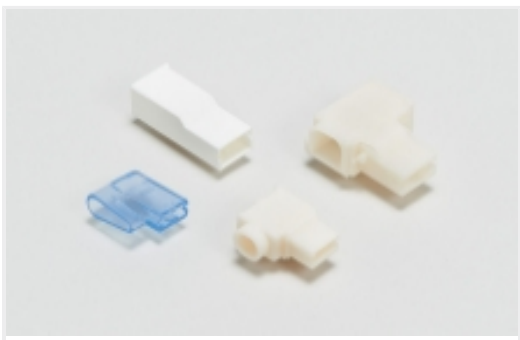

Crimp Terminal Housings(40)



Insertion & Extraction Tools(1)



Insulation Boots & Sleeves(1)



Joints & Splices(1)



PCB Terminals(42)



Quick Disconnects(205)



Splices(1)

Customers Also Bought



TE Part #794186-1
03P MINI UMNL2 PLUG HSG UL94V0




TE Part #520971-2
ULTRA-POD 250 ASY REC 18-14 AWG TPBR



TE Part #626416-2
RING TONGUE 0.5-1.5 MM2 0.60X13.23 TPBR



TE Part #160434-1
RING TONGUE WITH IS 20-16 AWG BR

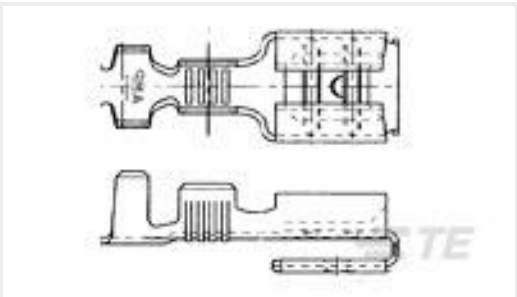

TE Part #160739-2
250 FASTON,PIGGYBACK REC.,18-14 AWG,TPBR



TE Part #2-1633961-6
CRIMPER, INSUL F PREMIUM




TE Part #520982-2
ULTRA-POD 187 ASSY REC 20-16 AWG TPBR



TE Part #794231-1
MINI UMNL2 SCKT 20-16AWG LP SN



TE Part #3-1534799-1
AMP DUOPLUG MK2 CONNECTOR 11P SELECTIVE



TE Part #1534415-9
DUOPL POW FEM CON9P

Documents

Product Drawings

187 FASTON REC 20-16 AWG TPBR

English

CAD Files

Customer View Model

ENG_CVM_CVM_5-160430-7_BA.2d_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG_CVM_CVM_5-160430-7_BA.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-160430-7_BA.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

[Appl. spec. FASTON COnn. .187 & .197 sr. rec. ctc. & L.I.F. rec. ctc.](#)

English

Application Specification

English

Agency Approvals

[VDE Certificate](#)

English