

CII | CII FCA-125 Series TE Internal #: 5-1617748-9 General Purpose Power Relay, DC, Polarized, Monostable, 1 Form C SPDT-CO, 25 A Contact Rating, 12 VDC Coil Voltage, Socket Mount, CII FCA-125 Series

View on TE.com >

Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: General Purpose Power Relay

Current Type: DC

Coil Magnetic System: Polarized, Monostable

Contact Arrangement: 1 Form C SPDT-CO

Contact Current Rating: 25 A

Features

Product Type Features

Relay & Contactor Type

connectivity

General Purpose Power Relay

Configuration Features

Contact Arrangement	1 Form C SPDT-CO
Electrical Characteristics	
Coil Resistance	2 08
Contact Current Rating	25 A
Coil Voltage Rating	12 VDC
Body Features	
Enclosure Type	Hermetically Sealed
Contact Features	
Contact Material	Silver Cadmium Oxide
Terminal Plating	Gold
Termination Features	
Main Termination & Connection Type	Socket Pins
Coil Termination & Connection Type	Socket Pins
Mechanical Attachment	
Product Mounting Feature Type	Mounting Brackets

C For support call+1 800 522 6752

FCA-125-AY2

General Purpose Power Relay, DC, Polarized, Monostable, 1 Form C SPDT-CO, 25 A Contact Rating, 12 VDC Coil Voltage, Socket Mount, CII FCA-125 Series



Product Mount Type	Socket Mount
Usage Conditions	
Operating Temperature Range	-70 – 125 °C[-94 – 257 °F]
Environmental Ambient Temperature (Max)	125 °C[257 °F]
Operation/Application	
Vibration Resistance	30G's, 33 – 3000Hz
Shock Resistance	200G's, 6ms
Current Type	DC
Coil Magnetic System	Polarized, Monostable
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025

Halogen Content

(247)

SVHC > Threshold:

Cd (10% in Component Part)

Cadmium oxide (3% in Component Part)

Article Safe Usage Statements:

Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

FCA-125-AY2

General Purpose Power Relay, DC, Polarized, Monostable, 1 Form C SPDT-CO, 25 A Contact Rating, 12 VDC Coil Voltage, Socket Mount, CII FCA-125 Series




Compatible Parts



Also in the Series | CII FCA-125 Series



Customers Also Bought

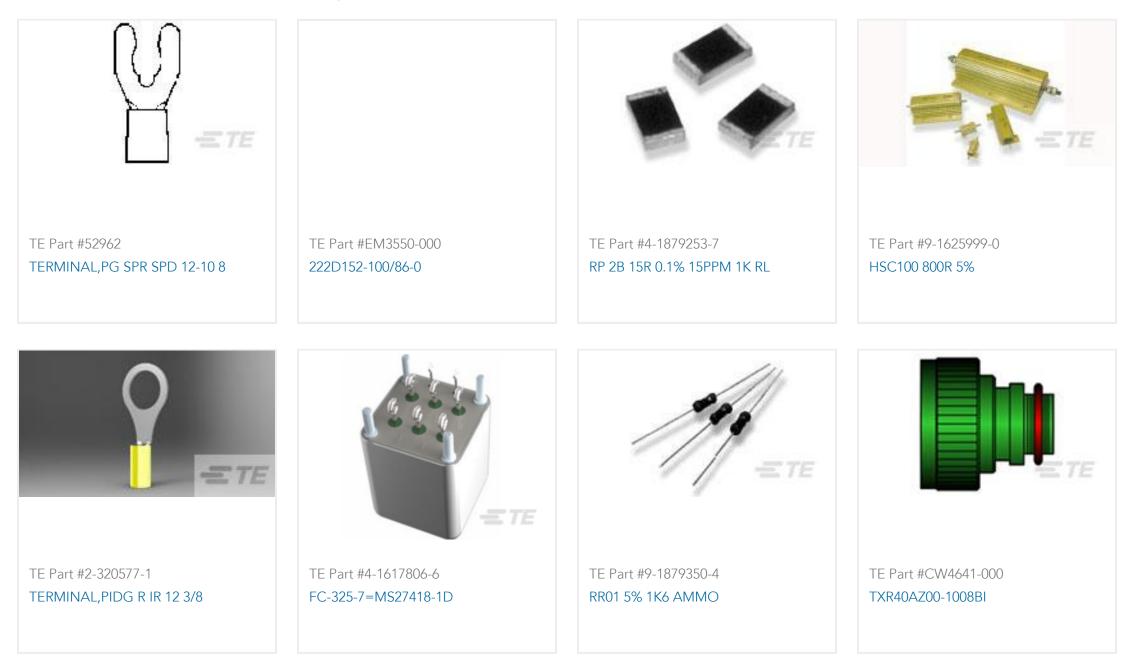

FCA-125-AY2

General Purpose Power Relay, DC, Polarized, Monostable, 1 Form C SPDT-CO, 25 A Contact Rating, 12 VDC Coil Voltage, Socket Mount, CII FCA-125 Series





Documents

Product Drawings FCA-125-AY2

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-1617748-9_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-1617748-9_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-1617748-9_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 5-1773450-5_sec5_FCA-125

English