


AMPLIMITE

TE Internal #: 5-166053-1 Pin Contact, Gold (Au), Snap-In Contact Retention, Size 20 Contact Size, 24 – 20 AWG, .2 – .56 mm² Wire, Crimp, Brass, Signal View on TE.com >



Connectors > Contacts > Connector Contacts > D-Sub Connector Contacts: Pin, Brass, Signal, Size 20

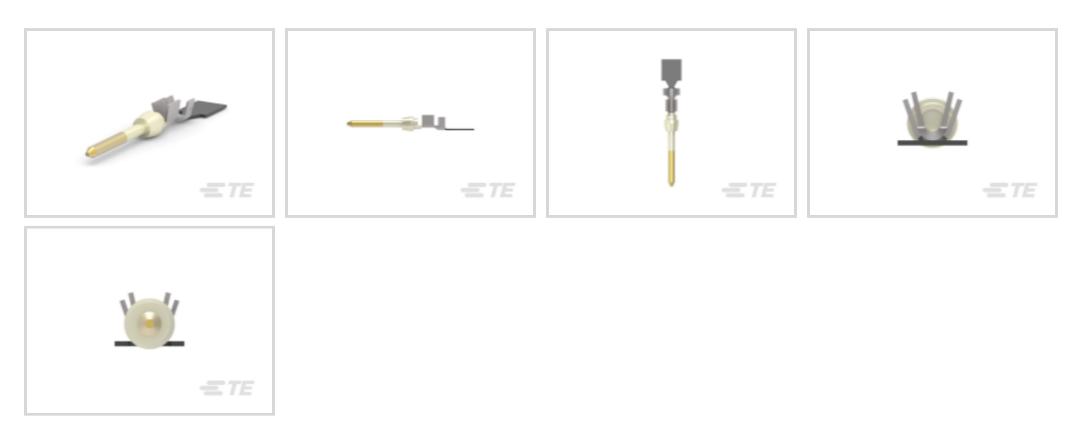

Contact Type: Pin

Contact Mating Area Plating Material: Gold (Au)

Contact Retention Type Within Housing: Snap-In

Contact Size: Size 20

Wire Size: 24 – 20 AWG

All D-Sub Connector Contacts: Pin, Brass, Signal, Size 20 (45)

Features

Contact Features

| Contact Underplating Material | Nickel |
|--|--------------|
| Mating Pin Diameter | 1 mm |
| PCB Contact Termination Area Plating Material | Tin |
| Contact Mating Area Plating Material Thickness | .76 μm |
| Contact Type | Pin |
| Contact Mating Area Plating Material | Gold (Au) |
| Contact Size | Size 20 |
| Contact Base Material | Brass |
| Contact Current Rating (Max) | 2 A |
| Termination Features | |
| Termination Method to Wire & Cable | Crimp |
| Product Terminates To | Wire & Cable |
| Mechanical Attachment | |

C For support call+1 800 522 6752

5-166053-1

Pin Contact, Gold (Au), Snap-In Contact Retention, Size 20 Contact Size, 24 – 20 AWG, .2 – .56 mm² Wire, Crimp, Brass, Signal



| Wire Insulation Support | With |
|---------------------------------------|------------------------------|
| Contact Retention Type Within Housing | Snap-In |
| Dimensions | |
| Compatible Insulation Diameter Range | 1.27 – 1.52 mm[.05 – .06 in] |
| Wire Size | .2 – .56 mm² |
| Usage Conditions | |
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
| Operation/Application | |
| Circuit Application | Signal |
| Identification Marking | |
| Contact Color Code | Red |
| Packaging Features | |
| Packaging Method | Small Reel |
| Packaging Quantity | 500 |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| | |

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

5-166053-1

Pin Contact, Gold (Au), Snap-In Contact Retention, Size 20 Contact Size, 24 – 20 AWG, .2 – .56 mm² Wire, Crimp, Brass, Signal



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Customers Also Bought





TE Part #4-2071571-9 SR940007 (SR4D4024)

Documents

Product Drawings COSI PIN CONTACT HD20 DF; 24-20 AWG

English

5-166053-1

Pin Contact, Gold (Au), Snap-In Contact Retention, Size 20 Contact Size, 24 – 20 AWG, .2 – .56 mm² Wire, Crimp, Brass, Signal



CAD Files

Customer View Model ENG_CVM_CVM_5-166053-1_AB.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-166053-1_AB.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-166053-1_AB.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

AMPLIMITE Subminiature D Connectors - Subminiature D Connectors for Cable Mounting

English

NECTOR_S_LINE_CONNECTOR_BROCHURE

English

Product Specifications Application Specification

English