

AMPLIMITE

TE Internal #: 5-1761184-1 Plug, Flat Ribbon Cable, 24 AWG, .2 mm² / .205 mm² Wire, Cableto-Board, 4 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, Signal, SDL Connectors

View on TE.com >

Connectors > Audio & Video Connectors > SDL Connectors



Connector & Housing Type: Plug

Compatible With Wire & Cable Type: Flat Ribbon Cable

Wire Size: 24 AWG

Connector System: Cable-to-Board

Features

Product Type Features Receptacle Configuration Standard Connector & Housing Type Plug Connector System Cable-to-Board Wire & Cable Connector & Contact Terminates To **Configuration Features** Compatible With Wire & Cable Type Flat Ribbon Cable Number of Positions 4 **Body Features** Shield Plating Material Tin over Nickel Shield Material Brass **Contact Features** Gold (Au) Contact Mating Area Plating Material Contact Base Material Copper Alloy 50 µin



5-1761184-1

Plug, Flat Ribbon Cable, 24 AWG, .2 mm² / .205 mm² Wire, Cable-to-Board, 4 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, Signal, SDL Connectors



Contact Current Rating (Max)	1.5 A
Mechanical Attachment	
Polarization Code	E
PCB Mount Retention	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Color	Smoke Gray
Housing Material	Polycarbonate GF
Centerline (Pitch)	1.27 mm[.05 in]
Dimensions	
Conductor Insulation Diameter Range	1.27 mm[.05 in]
Wire Size	24 AWG
Usage Conditions	
Operating Temperature Range	-20 – 80 °C[-4 – 176 °F]
Operation/Application	
Circuit Application	Signal

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products


5-1761184-1

Plug, Flat Ribbon Cable, 24 AWG, .2 mm² / .205 mm² Wire, Cable-to-Board, 4 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, Signal, SDL Connectors



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

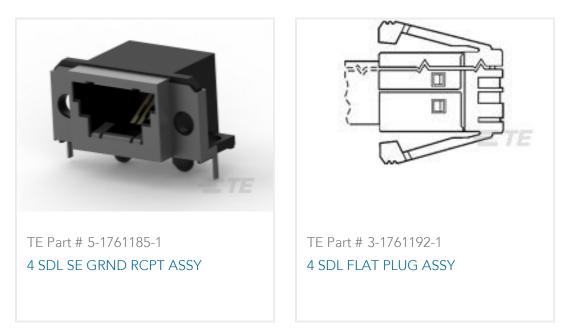

Customers Also Bought



180DEG,COD G

UNSEALED

SLD,180 DEG

UNSEALED





TE Part #2307198-3 1POS,FAKRA AUT,PIN OUTER HSG, SLD,180 DEG

TE Part #2141360-3 HANDHOLD,CRIMP BUSHING



TE Part #2320666-1 HSD DIA 0.6,SOC HSG TRMNL BLOCK,180DEG



Documents

Product Drawings

C For support call+1 800 522 6752

5-1761184-1

Plug, Flat Ribbon Cable, 24 AWG, .2 mm² / .205 mm² Wire, Cable-to-Board, 4 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, Signal, SDL Connectors



4 SDL FLAT PLUG ASSY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-1761184-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-1761184-1_A.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_5-1761184-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English