


AMPLIMITE

TE Internal #: 5-1761184-3 Plug, Flat Ribbon Cable, 24 AWG, .2 mm² / .205 mm² Wire, Cableto-Board, 8 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, Signal, SDL Connectors

View on TE.com >



Connectors > Audio & Video Connectors > SDL Connectors



Connector & Housing Type: Plug

Compatible With Wire & Cable Type: Flat Ribbon Cable

Wire Size: 24 AWG

Connector System: Cable-to-Board

Features

Product Type Features

Receptacle Configuration	Standard
Connector & Housing Type	Plug
Connector System	Cable-to-Board
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Compatible With Wire & Cable Type	Flat Ribbon Cable
Number of Positions	8
Body Features	
Shield Plating Material	Tin over Nickel
Shield Material	Brass
Contact Features	
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Copper Alloy
	50 µin
Contact Current Rating (Max)	1.5 A
Mechanical Attachment	
Polarization Code	E
PCB Mount Retention	Without
Connector Mounting Type	Cable Mount (Free-Hanging)

C For support call+1 800 522 6752

5-1761184-3

Plug, Flat Ribbon Cable, 24 AWG, .2 mm² / .205 mm² Wire, Cable-to-Board, 8 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, Signal, SDL Connectors



Housing Features	
Housing Color	Smoke Gray
Housing Material	Polycarbonate GF
Centerline (Pitch)	1.27 mm[.05 in]
Dimensions	
Conductor Insulation Diameter Range	1.27 mm[.05 in]
Wire Size	24 AWG
Usage Conditions	
Operating Temperature Range	-20 – 80 °C[-4 – 176 °F]
Operation/Application	
Circuit Application	Signal
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


China RoHS 2 Directive MIIT Order No 32, 2016

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

5-1761184-3

Plug, Flat Ribbon Cable, 24 AWG, .2 mm² / .205 mm² Wire, Cable-to-Board, 8 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, Signal, SDL Connectors



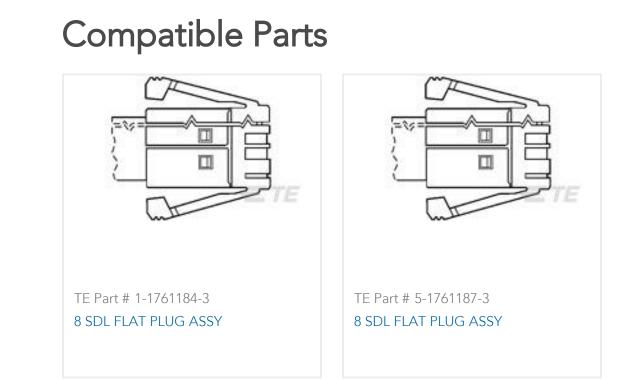

Customers Also Bought



Documents

Product Drawings 8 SDL FLAT PLUG ASSY

English



CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-1761184-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-1761184-3_A.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_5-1761184-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.)

5-1761184-3

Plug, Flat Ribbon Cable, 24 AWG, .2 mm² / .205 mm² Wire, Cable-to-Board, 8 Position, 1.27 mm [.05 in] Centerline, Wire & Cable, Signal, SDL Connectors



English

Instruction Sheet (U.S.)

English