5-583616-2 - ACTIVE

TE Internal #: 5-583616-2 Socket Contact, Gold (Au), Locking Lance Contact Retention, Discrete Wire, 28 – 24 AWG, .08 – .24 mm² Wire, 159.8 – 642.4 CMA, Crimp, Phosphor Bronze

View on TE.com >



Connectors > Contacts > Connector Contacts



Contact Type: Socket

Contact Mating Area Plating Material: Gold (Au)

Wire Contact Termination Area Plating Material: Tin

Contact Retention Within Housing: With

Contact Retention Type Within Housing: Locking Lance

Features

Product Type Features

Discrete Wire Type	Stranded
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Contact Features	
Contact Underplating Material	Nickel
Contact Orientation	Straight
Contact Underplating Material Thickness	.76 μm[30 μin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Length	17.27 mm[.68 in]
PCB Contact Termination Area Plating Material	Tin
Barrel Type	Open
Contact Type	Socket

C For support call+1 800 522 6752

5-583616-2

Socket Contact, Gold (Au), Locking Lance Contact Retention, Discrete Wire, 28 – 24 AWG, .08 – .24 mm² Wire, 159.8 – 642.4 CMA, Crimp, Phosphor Bronze



Contact Mating Area Plating Material	Gold (Au)	
Wire Contact Termination Area Plating Material	Tin	
Contact Retention Within Housing	With	
Contact Base Material	Phosphor Bronze	
Contact Current Rating (Max)	5 A	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Product Terminates To	Wire & Cable	
Mechanical Attachment		
Wire Insulation Support	With	
Contact Retention Type Within Housing	Locking Lance	
Dimensions		
Compatible Insulation Diameter Range	.89 – 1.4 mm[.035 – .055 in]	
Wire Size	159.8 – 642.4 CMA	
Usage Conditions		
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Identification Marking		
Contact Color Code	Orange	
Packaging Features		
Packaging Quantity	7000	
Packaging Method	Reel & Box	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247)	

5-583616-2

Socket Contact, Gold (Au), Locking Lance Contact Retention, Discrete Wire, 28 – 24 AWG, .08 – .24 mm² Wire, 159.8 – 642.4 CMA, Crimp, Phosphor Bronze



Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability


Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

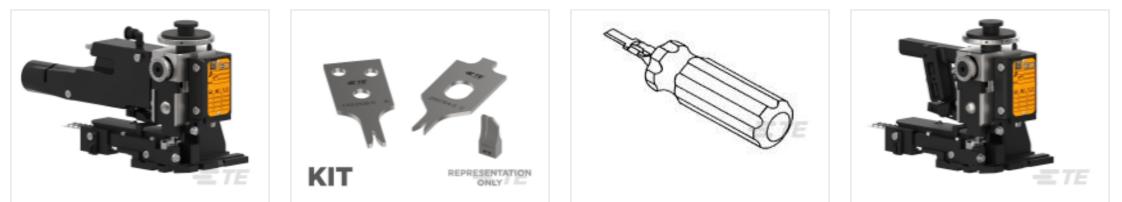

TE Part # 2151967-2	TE Part # 7-2151967-7	TE Part # 91073-1	TE Part # 2151967-1
OCEAN_2.0_Applicator-S-042F062O- RSA	OCEAN_2.0_SPARE_PART_KIT- 042F062O	TW LF EXT TOOL	OCEAN_2.0_Applicator-S-042F062O- RSM

Customers Also Bought



5-583616-2

Socket Contact, Gold (Au), Locking Lance Contact Retention, Discrete Wire, 28 – 24 AWG, .08 – .24 mm² Wire, 159.8 – 642.4 CMA, Crimp, Phosphor Bronze









TE Part #5053044177

RNF-100-3/16-BK-SP

Documents

Product Drawings CONT.CRP.SNAP TW.LF. STRIP

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_5-583616-2_BM.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-583616-2_BM.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-583616-2_BM.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Product Specifications Application Specification

English