



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **100**

Number of Rows: **2**

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Breakaway
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Connector Contact Load Condition	Fully Loaded
Board-to-Board Configuration	Parallel
PCB Mount Orientation	Vertical
Number of Positions	100
Number of Rows	2

Electrical Characteristics

Insulation Resistance	5000 MΩ
-----------------------	---------



Dielectric Withstanding Voltage (Max)750 Vrms

Body Features

Primary Product ColorGreen

Contact Features

Contact Underplating MaterialNickel

Contact Mating Area Plating Material Thickness.8 µm[31.5 µin]

Mating Square Post Dimension.64 mm[.025 in]

PCB Contact Termination Area Plating Material Thickness2.5 µm

Contact Shape & FormSquare

Contact Base MaterialBrass

PCB Contact Termination Area Plating MaterialTin

Contact Mating Area Plating MaterialGold (Au), Gold Flash

Contact TypePin

Contact Current Rating (Max)5 A

Termination Features

Termination Post & Tail Length3.2 mm[.126 in]

Square Termination Post & Tail Dimension.64 mm[.025 in]

Termination Method to PCBThrough Hole - Solder

Mechanical Attachment

PCB Mount RetentionWithout

PCB Mount AlignmentWithout

Connector Mounting TypeBoard Mount

Mating AlignmentWithout

Housing Features

Housing MaterialPBT

Centerline (Pitch)2.54 mm[.1 in]

Dimensions

Row-to-Row Spacing2.54 mm[.1 in]

PCB Thickness (Recommended)1.57 mm[.062 in]

Usage Conditions

Housing Temperature RatingStandard

Operating Temperature (Max)105 °C[221 °F]



Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	130
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 5-925370-0
MOD IV REC HSG, 2X50P

Also in the Series | AMPMODU Headers




Automotive Headers(1)

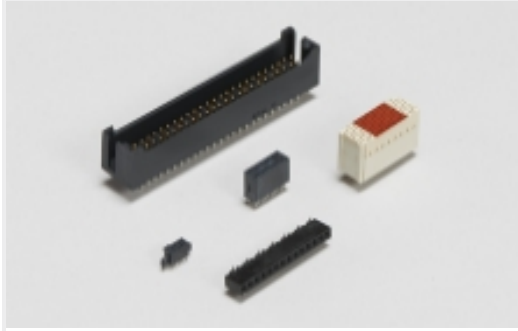


Board-to-Board Headers & Receptacles(1576)



Connector Contacts(47)

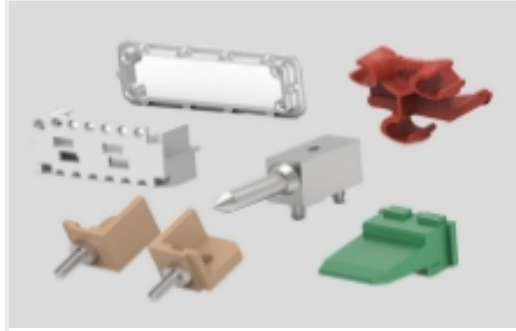

Connector Hardware(1)

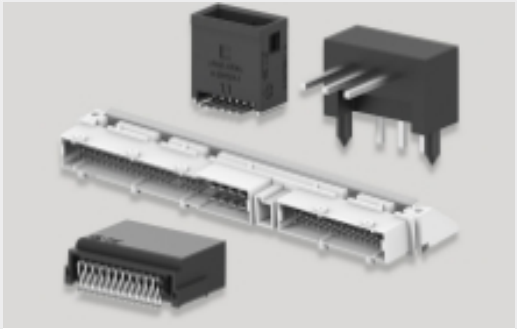


PCB Headers & Receptacles(1621)



Rectangular Power Connectors(43)




Wire-to-Board Connector Assemblies & Housings(5)

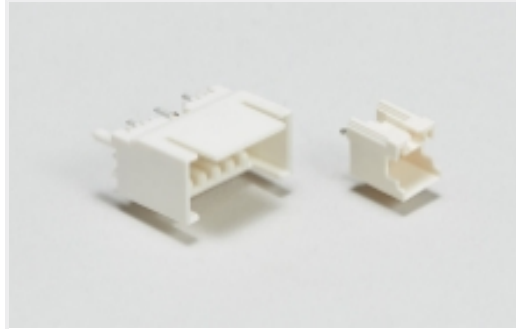

Wire-to-Board Headers & Receptacles (114)

Customers Also Bought

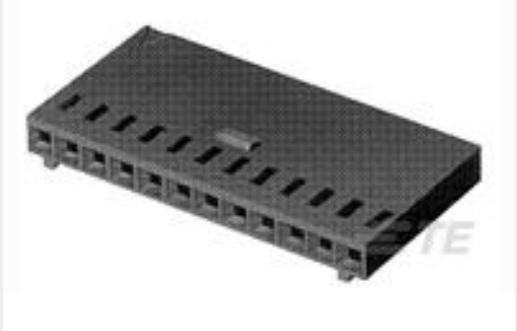

TE Part #1-102241-4
16 MODIV HSG COMP SR .100 POL



TE Part #1-1625959-5
HB03RE 20M 1% 100PPM



TE Part #5-826656-0
50P AMPMODU II STIFT LEI




TE Part #647402-6
06P SL156 HSG W/RMP&TABS,OVSZ




TE Part #926209-5
LOCKING CLIP HSG.




TE Part #1-215570-2
MICRO-MATCH PBC.12P

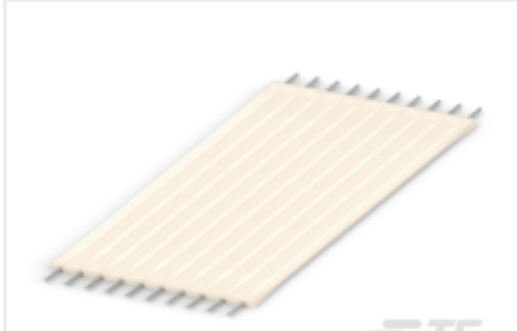

TE Part #1-6437158-6
FSN-11A

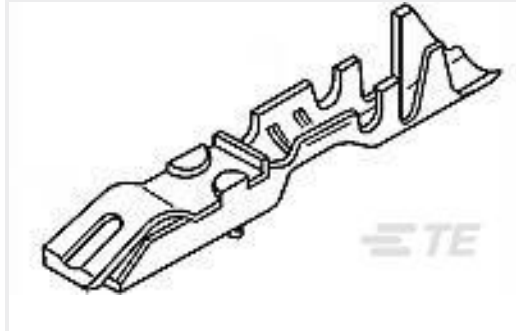

TE Part #5-867052-1
LOCKING CLIP CONT ASSY .025 SQ

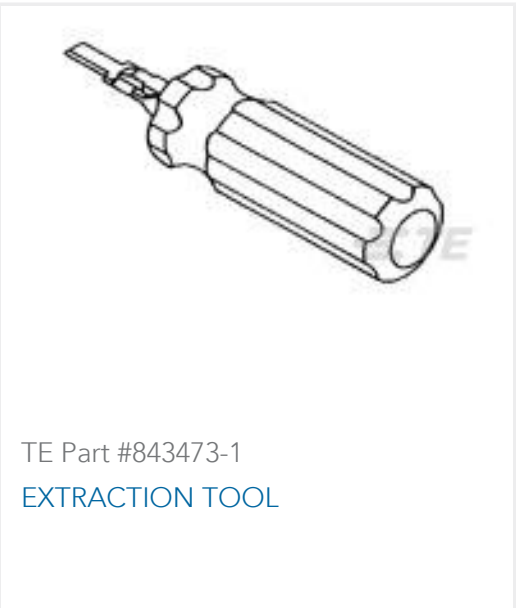

Documents

Product Drawings

MOD 2 PINHDR 2X50P.

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_5-825440-0_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_5-825440-0_F.3d_igs.zip

English

Customer View Model

ENG_CVM_5-825440-0_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Agency Approvals

UL Report

English