



Heat Shrink Tubing

Tubing Product Type: **Heat Shrink Tubing**

Primary Product Color: **Gray**

Shrink Ratio: **1.38:1**

Wall Type: **Single Wall**

Recovered Inside Diameter (Max): **15.87 mm [.625 in]**

Features

Product Type Features

Tubing Product Type	Heat Shrink Tubing
Wall Type	Single Wall

Electrical Characteristics

Operating Voltage (Max)	.6 kV
-------------------------	-------

Body Features

Primary Product Color	Gray
Shrink Ratio	1.38:1
Primary Product Material	Silicone Rubber
Flexibility	Very Flexible

Dimensions

Recovered Wall Thickness (Nominal)	.5 mm[.02 in]
Recovered Inside Diameter (Max)	15.87 mm[.625 in]
Expanded Inside Diameter (Min)	31.75 mm[1.25 in]
Tubing Size Range	15.88 – 31.75 mm[.625 – 1.25 in]

Usage Conditions

Shrink Temperature (Min)	135 °C
Tubing Flammability Type	Highly Flame-Resistant
Operating Temperature Range	-75 – 200 °C
Recovery Temperature	175 °C

Operation/Application

Mechanical Resistance	Radiation Sterilization
-----------------------	-------------------------



Product Availability

Applicable Region	Worldwide
-------------------	-----------

Packaging Features

Packaging Method	Piece
------------------	-------

Other

Meets Low Outgassing Requirements	No
Product Source	UK

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought

SRFR-4/2.9-8-SP

Heat Shrink Tubing, Gray, 1.38:1, Single Wall, Shrinks To 15.87 mm [.625 in], Silicone Rubber, 31.75 mm [1.25 in] Expanded Inside



TE Part #5039964005
SRFR-15/9.6-8-SP




TE Part #2-34853-1
TERM,PG, R, 12-10, #8, T&R



TE Part #2181133003
55A0811-24-9



TE Part #1SNK906303R0000
JB6-3

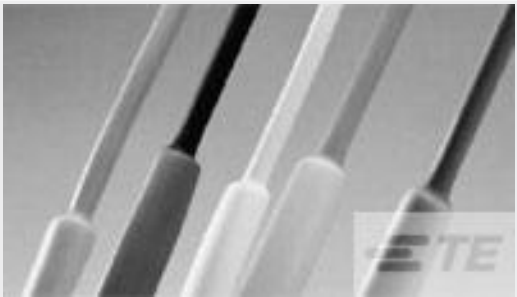

TE Part #5220234001
ZH-100-1/8-0-SP



TE Part #1SNK908302R0000
JB8-2



TE Part #1SNK908303R0000
JB8-3



TE Part #1SNK906302R0000
JB6-2



TE Part #5039944006
SRFR-7.8/4.6-8-SP



TE Part #CD39543001
55K9512-20-2/6-6LCK0479

Documents

Product Drawings

SRFR-4/2.9-8-SP

English

Datasheets & Catalog Pages

1654025_Sec3_SRFR

English

raychem-tubing-product-selection-guide

English