

STRATO-THERM

TE Internal #: 50835


Closed Ring Tongue Terminal, 18 – 16 AWG, #6 / M3.5 Stud, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Nickel Plating,

STRATO-THERM

View on TE.com >



Terminals & Splices > Ring Terminals

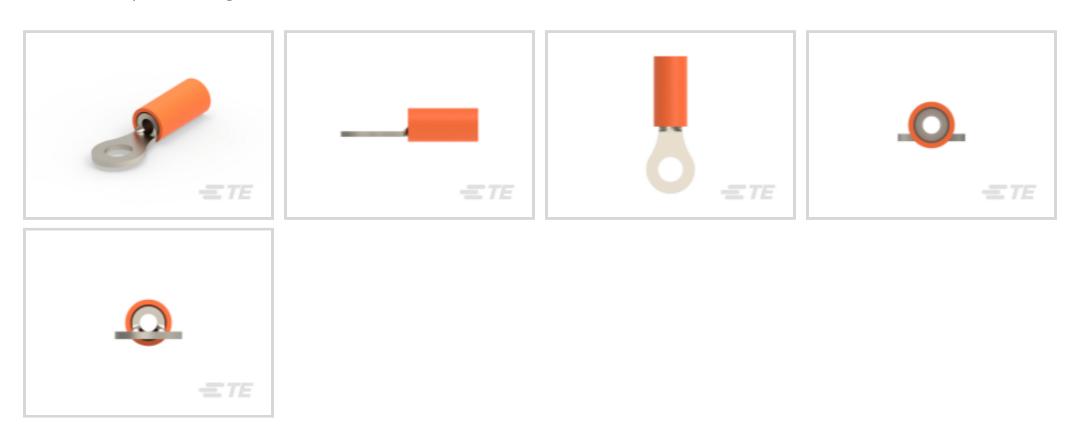

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 1600 – 2800 CMA

Stud Size: **#6, M3.5**

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#6, M3.5
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Electrical Characteristics	
Voltage Rating	300 V
Body Features	
Product Weight	5.277 g
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Nickel



Wire Insulation Support	With
Dimensions	
Wire Size	1600 – 2800 CMA
Stud Diameter	3.68 mm[.145 in]
Tongue Thickness	.84 mm[.033 in]
Product Length	20.24 mm[.797 in]
Compatible Insulation Diameter (Max)	3.43 mm[.135 in]
Compatible Insulation Diameter Range	1.4 – 3.43 mm[.055 – .135 in]
Usage Conditions	
Insulation Option	Partially Insulated
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	5000
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | STRATO-THERM



Crimp Wire Pins, Tabs & Ferrules(1)



Ring Terminals(85)



Splices(13)

Customers Also Bought



TE Part #35148
TERMINAL,PIDG R 12-10 4



TE Part #174670-1 KEYING PLUG MINI U-M-N-L



TE Part #0662-207-1631L CONT SOC ASSY









TE Part #983843-000 RMK-25X50-A4





TE Part #2291686-1 COPALUM,SLD,R,1 CU 3/8

TE Part #2331835-1
TERMINAL, COPALUM R 1/0 3/8

Documents

Product Drawings

TERMINAL, PIDG PTFE R 18-16 6

English

CAD Files

Customer View Model

ENG_CVM_CVM_50835_E.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_50835_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_50835_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

STRATO-THERM Terminals & Splices for High Temperature Applications

English

Product Specifications

Application Specification

English