




Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors >

Hard Metric Backplane Receptacle Connector: Mezzanine, 2mm

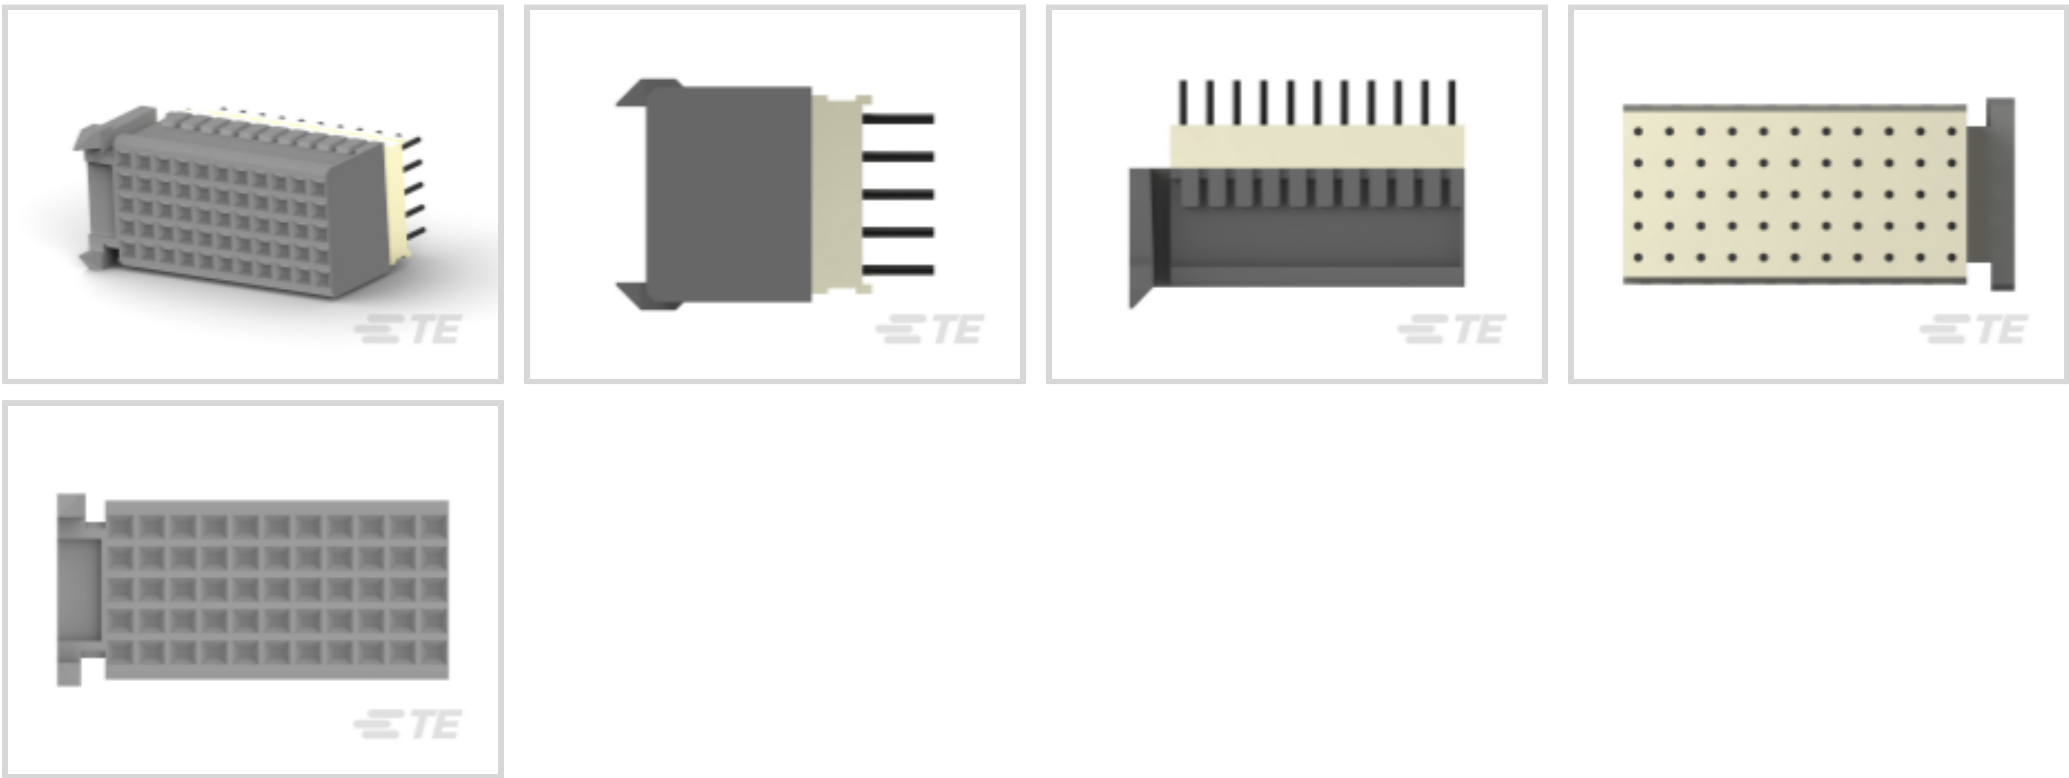

PCB Connector Type: **PCB Mount Receptacle**

Data Rate: **≤1 Gb/s**

Number of Columns: **11**

Number of Rows: **5**

Backplane Architecture: **Mezzanine**

[All Hard Metric Backplane Receptacle Connector: Mezzanine, 2mm \(27\)](#)

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Backplane Interface Type	2mm HM
Connector System	Board-to-Board
PCB Connector Type	PCB Mount Receptacle
Sealable	No

Configuration Features

Number of Columns	11
Number of Rows	5
Backplane Architecture	Mezzanine
Number of Positions	55
PCB Mount Orientation	Vertical

Signal Characteristics



Crosstalk Version	Reduced
-------------------	---------

Data Rate	≤1 Gb/s
-----------	---------

Body Features

Primary Product Color	Gray
-----------------------	------

Contact Features

Contact Underplating Material	Nickel
-------------------------------	--------

Contact Mating Area Length	3.3 mm
----------------------------	--------

Contact Base Material	Phosphor Bronze
-----------------------	-----------------

CompactPCI Designation	None
------------------------	------

PCB Contact Termination Area Plating Material	Tin
---	-----

Feedthrough Post Length	3.7 mm
-------------------------	--------

Contact Type	Socket
--------------	--------

Contact Mating Area Plating Material	Nickel (Ni)
--------------------------------------	-------------

Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
--	-----------------

Contact Current Rating (Max)	1.5 A
------------------------------	-------

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
---------------------------	--------------------------

Mechanical Attachment

Connector Mounting Type	Board Mount
-------------------------	-------------

Housing Features

Housing Material	Polyester GF
------------------	--------------

Centerline (Pitch)	2 mm[.078 in]
--------------------	---------------

Dimensions

Backplane Module Length	25 mm
-------------------------	-------

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Shielded	No
----------	----

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------



Packaging Features

Packaging Quantity	22
Packaging Method	Tray

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 122561-1
SUPPORT ANVIL 2MM H.M. 7 ROW

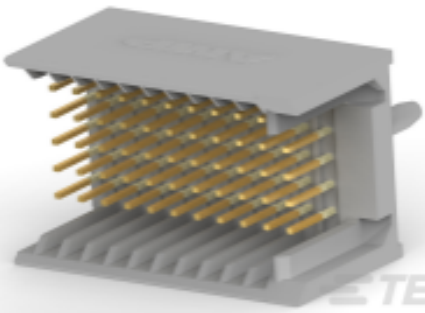

TE Part # 5100159-1
2MM HDR, 55 POS EXTN MOD


Also in the Series | Z-PACK 2mm HM

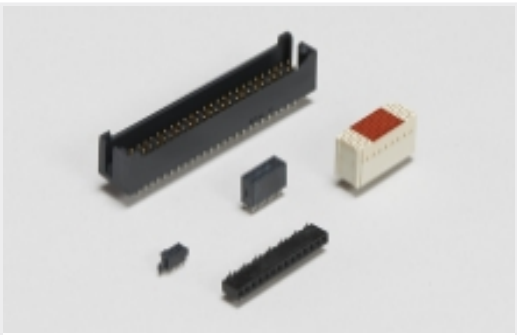


Board-to-Board Headers & Receptacles(46)



Connector Contacts(2)

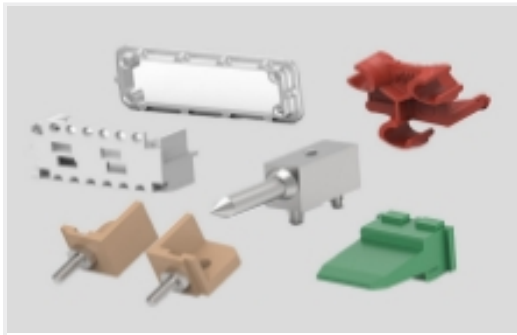

Connector Hardware(91)

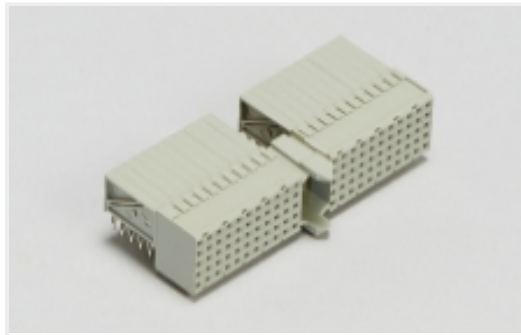

Hard Metric Backplane Connectors (266)




Power Contacts(2)




Rectangular Power Connectors(46)

Customers Also Bought




TE Part #ZPF00000000077499
DBAS 76G 61-42 PN

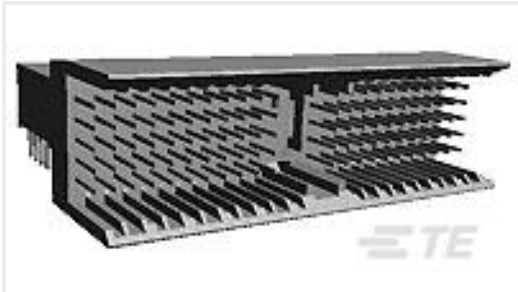

TE Part #5106012-1
Z-PACK/C RAMH. 55P.



TE Part #6469076-1
HM-ZD 2PR HDR ASSY 1.8MM

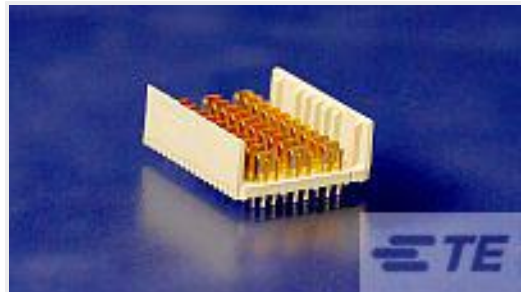


TE Part #6469085-1
HMZD 3PAIR, HDR ASSY, 25MM MOD




TE Part #ZPF00000000013738
DBAS 76G 61-42 SN 1A




TE Part #ZPF000000000105846
DBAS 74-61-42 PN 1A

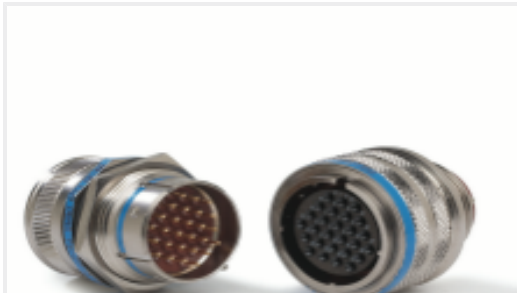


TE Part #ZPF000000000106584
DBAS 74-61-21 PN 090

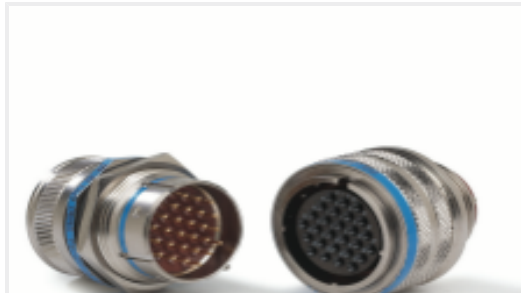

TE Part #ZPF000000000205570
DBAS 76G 61-21 SN 090-6117



TE Part #7-6450830-2
MBXL R/A HDR 1P + 8S + 1P



TE Part #ZPF000000000000168
006-0040-08

Documents



Product Drawings

Z-PACK/C VF 55P

English

CAD Files

Customer View Model

ENG_CVM_CVM_5106775-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5106775-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5106775-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English