



Terminals & Splices > Quick Disconnects > ULTRA POD: Straight, Receptacle Assembly, Unplated, .250 inch



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .32 – .82 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

[All ULTRA POD: Straight, Receptacle Assembly, Unplated, .250 inch \(11\)](#)

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Electrical Characteristics

Voltage Rating	600 V
----------------	-------

Body Features

Insulation Material	Nylon
---------------------	-------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight



Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Product Length	34.67 mm[1.365 in]
Compatible Insulation Diameter Range	2.29 – 3.3 mm[.09 – .13 in]
Terminal Material Thickness	.41 mm[.016 in]
Wire Size	.32 – .82 mm²

Usage Conditions

Insulation Option	Fully Insulated
Operating Temperature Range	-40 – 150 °C[-40 – 302 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Flammability Rating	UL 94V-2
Compatible With Approved Standards Products	UL E66717

Packaging Features

Packaging Quantity	2000
Packaging Method	Strip/Reel

Other

Barrel Color	Natural
--------------	---------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	




Current ECHA Candidate List: JAN 2025
(247)
Candidate List Declared Against: JAN 2025
(247)
Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

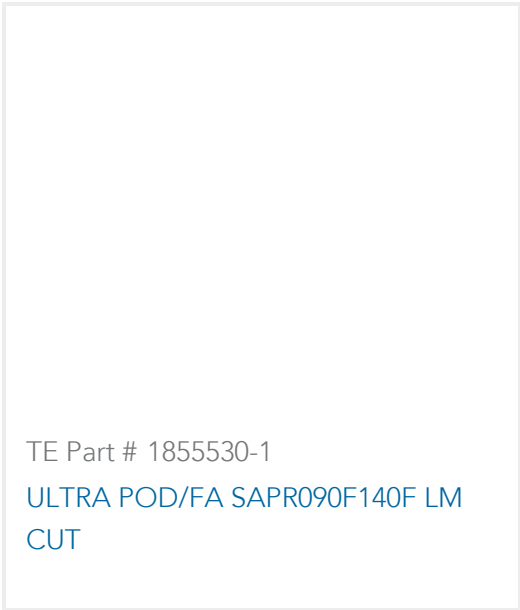

TE Part # 1855530-1
ULTRA POD/FA SAPR090F140F LM CUT

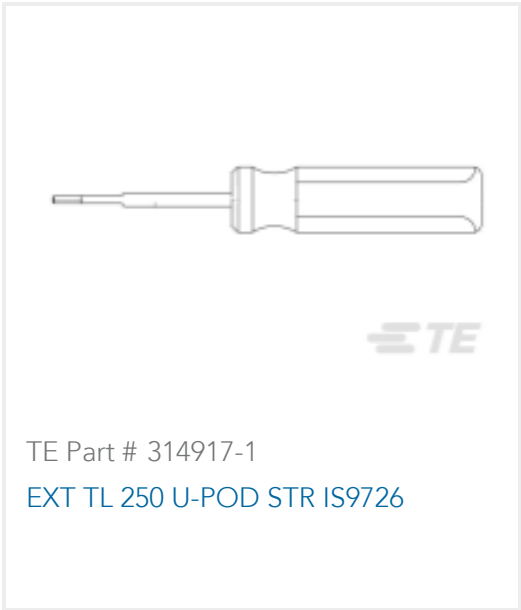

TE Part # 314917-1
EXT TL 250 U-POD STR IS9726

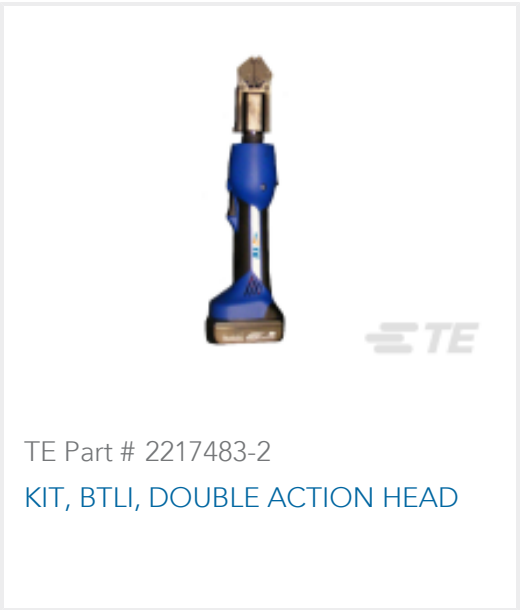

TE Part # 2217483-2
KIT, BTLI, DOUBLE ACTION HEAD



TE Part # 1969161-5
ULTRA-POD 250 ASY REC 0.3-0.8 MM2 TPBR



TE Part # 1852889-1
MACH,U-POD.250 SAPR090F130F LM



TE Part # 2217483-1
KIT, BTLI, DOUBLE ACTION HEAD



TE Part # 91514-1
CCII FASTON 250 REC 22-18 ASSY



TE Part # 90166-1
DAHT 250 FASTON REC 22-18 ASSY







TE Part # 314916-1

INSER TL 250 U-POD STR IS9725





TE Part # 90165-1

DAHT 250 FASTON REC 18-14 ASSY

Also in the Series | Ultra-Pod 250



Insertion & Extraction Tools(2)



Quick Disconnects(43)

Customers Also Bought



TE Part #63306-2

250 FASTON REC 18-14 AWG TPBR





TE Part #61769-1

SPLICE 1200-2600 .020 BR





TE Part #520973-1

ULTRA-POD 187 ASSY REC 20-16 AWG BR





TE Part #521637-1


ULTRA-POD 250 ASSY REC 18-14 AWG BR





TE Part #521411-1

ULTRA-POD 250 ASY REC 22-18 AWG BR

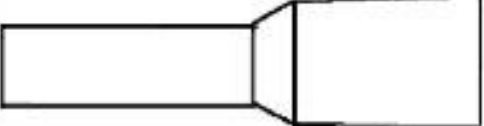

TE Part #966144-4

FER,WIRE,DBL,PL SLV,1.00/18,L8,RED, LP





TE Part #42452-1

187 FASTON REC 20-16 AWG BR





TE Part #42800-1

187 FASTON REC 20-16 AWG BR



TE Part #63435-1

250 FASTON REC 14-10 AWG SPBR



TE Part #63609-1

250 FASTON REC 22-18 AWG BR



Documents

Product Drawings

ULTRA-POD 250 ASSY REC 22-18 AWG BR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_520988-1_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_520988-1_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_520988-1_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Ultra-Fast and Ultra Fast Plus

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English

UL Report

English