# 521213-2 × OBSOLETE

#### Ultra-Pod | Ultra-Pod 250

TE Internal #: 521213-2

TE Internal Description: ULTRA-POD 250 ASSY REC 18-14 AWG


TPBR

ULTRA POD: Straight, Receptacle Assembly, Tin Plated, 0.25 inch

View on TE.com >



Terminals & Splices > Quick Disconnects > ULTRA POD: Straight, Receptacle Assembly, Tin Plated, 0.25 inch











Quick Disconnect Terminal Type: Receptacle

Wire Size: .82 – 2.08 mm<sup>2</sup>

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

All ULTRA POD: Straight, Receptacle Assembly, Tin Plated, 0.25 inch (13)

## Features

Product Type Features	
Insertion Force	Low
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single
Electrical Characteristics	
Voltage Rating	600 V
Body Features	
Insulation Material	Nylon
Contact Features	
Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]

.81 mm[.032 in]

Straight

Mating Tab Thickness

Terminal Orientation



Contact Base Material	Brass	
Terminal Plating Material	Tin	
Crimp Type	F-Crimp	
Barrel Type	Open	
Termination Features		
Product Terminates To	Wire & Cable	
Mechanical Attachment		
Wire Insulation Support	With	
Dimensions		
Product Length	33.53 mm[1.32 in]	
Compatible Insulation Diameter Range	2.79 – 4.57 mm[.11 – .18 in]	
Terminal Material Thickness	.41 mm[.016 in]	
Wire Size	.82 – 2.08 mm²	
Usage Conditions		
Insulation Option	Fully Insulated	
Industry Standards		
Compatible With Agency/Standards Products	CSA, UL	
UL Flammability Rating	UL 94V-2	
Packaging Features		
Packaging Quantity	2000	
Packaging Method	Strip/Reel	
Other		
Barrel Color	Natural	

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2022 (224)




$D_{\alpha\alpha\alpha}$	n 0+	aantain	REACH	CV/LIC
Does	not	contain	KEACH	SVHU

Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Also in the Series | Ultra-Pod 250

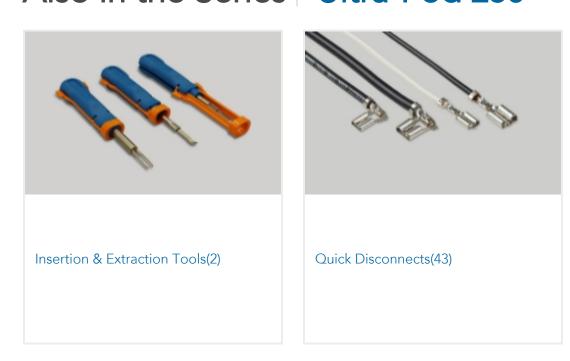

# **Customers Also Bought**























#### **Documents**

#### **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_521213-2\_G.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_521213-2\_G.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_521213-2\_G.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

Ultra-Fast and Ultra Fast Plus

English

### **Product Specifications**

**Application Specification** 

English

**Application Specification** 

English

## Agency Approvals

Agency Approval Document

English