



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Tab**

Wire Size: **3.31 – 5.26 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Electrical Characteristics

Voltage Rating	600 V
----------------	-------

Body Features

Insulation Material	Nylon
---------------------	-------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass



Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Product Length	38.87 mm[1.53 in]
Compatible Insulation Diameter Range	3.81 – 5.08 mm[.15 – .2 in]
Terminal Material Thickness	.4 mm[.015 in]
Wire Size	3.31 – 5.26 mm²

Usage Conditions

Insulation Option	Fully Insulated
Operating Temperature Range	-40 – 150 °C[-40 – 302 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Flammability Rating	UL 94V-2
Compatible With Approved Standards Products	UL E66717

Packaging Features

Packaging Quantity	1500
Packaging Method	Strip/Reel

Other

Barrel Color	Natural
--------------	---------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247)



Candidate List Declared Against: JAN 2025
(247)
Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 521747-1
ULTRA-POD 250 ASSY TAB 18-14
AWG BR

TE Part # 521451-2
ULTRA-POD 250 ASSY TAB 18-14
AWG TPBR

TE Part # 521217-2
ULTRA-POD 250 ASSY TAB 18-14
AWG TPBR

Also in the Series | Ultra-Pod 250

Insertion & Extraction Tools(2)

Quick Disconnects(43)

Customers Also Bought



TE Part #1-1879455-9
TE 1500W 33R 5% Bracket



TE Part #2329907-1
Power Versa-Lock SEAL TAB, 14-16 AWG



TE Part #2329908-1
Power Versa-Lock SEAL TAB, 18-20 AWG




TE Part #1-2345729-1
Power Versa-Lock FH CAP, 1X1 KEY A



TE Part #8-2232263-3
PTL 1X3 CAP PANEL MT GLW WIRE KEY D ORA



TE Part #1-2232263-1
PTL 1X2 CAP PANEL MT HOT WIRE KEY A BLK

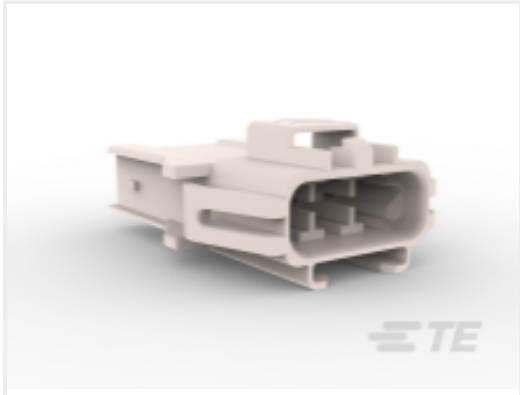

TE Part #1-2378158-3
Power Versa-Lock CAP, 1X3 KEY A



TE Part #2334614-1
Power Versa-Lock BACK COVER 1P



TE Part #350538-2
UMNL PIN 20-14 AU/Ni/BR



TE Part #9-1879214-9
CPF 0402 3K92 0.1% 25PPM 1K RL

Documents

Product Drawings

ULTRA-POD 250 ASSY TAB 12-10 AWG TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_521227-2_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_521227-2_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_521227-2_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



Ultra-Fast and Ultra Fast Plus

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English

UL Report

English