



TE Internal #: 5227161-2
BNC Connector, Jack, 50 ohm, Bayonet, 4 GHz, Cable-to-Board, 1
Position, Printed Circuit Board, Panel Mount, -55 – 85 °C [-67 – 185 °
F], Zinc, Nickel
[View on TE.com >](#)

Connectors > RF Connectors > Coax Connectors > BNC RF Connector: Male (Jack), Right Angle



RF Interface: **BNC**
RF Connector Style: **Jack**
RF Connector Mated Outer Diameter (Approximate): **14.53 mm [.572 in]**
Impedance: **50 Ω**
RF Connector Coupling Mechanism: **Bayonet**

[All BNC RF Connector: Male \(Jack\), Right Angle \(30\)](#)

Features

Product Type Features

RF Interface	BNC
RF Connector Style	Jack
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

EMI & RFI Protection & Suppression Type	PCB Ground
Impedance	50 Ω

Body Features



Body Material	Zinc
Body Plating Material	Nickel

Contact Features

RF Connector Center Contact Underplating Material	Nickel
	5080 µin
RF Connector Center Contact Plating Material	Tin (Sn)
RF Connector Center Contact Material	Phosphor Bronze

Termination Features

Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	4.11 mm[.162 in]

Mechanical Attachment

Panel Attachment Style	Rear Mount
PCB Mount Retention	With
Panel Mount Feature Type	Lockwasher and Nut
RF Connector Coupling Mechanism	Bayonet
Connector Mounting Type	Panel Mount
RF Contact Captivation Method	Solder
Detent	With

Housing Features

Housing Color	Black
---------------	-------

Dimensions

Mounting Post Length	3.48 mm[.137 in]
Profile Height from PCB	15.88 mm[.625 in]
RF Connector Mated Outer Diameter (Approximate)	14.53 mm[.572 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]

Operation/Application

Operating Frequency	4 GHz
---------------------	-------

Packaging Features

Packaging Method	Tube
------------------	------



Other

Grade	Commercial
Dielectric Material	Polymethylpentene

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (3.7% in 74019106) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-5221128-7
PLUG,COMMERCIAL BNC



TE Part # 8-5227079-2
COMM BNC PLUG



TE Part # 413779-3
COML BNC,50 OHM, HEX CRIMP



TE Part # 5227426-1
BNC BLKHD RECPT SEALED



TE Part # 5227169-5
BNC - SOLDER RECEPT



TE Part # 5227079-5
COMM BNC PLUG



TE Part # 5228980-7
JACK,BHD,COML,SERIES BNC,GOLD



TE Part # 5227169-8
BNC - SOLDER RECEPT



TE Part # 5227079-7
COMM. BNC-PLUG




TE Part # 5330876
BNC PLUG



TE Part # 1-5227079-1
COMM BNC PLUG



TE Part # CAT-076-BNCJKSH50
BNC RF Connector: jack assembly - short, 50 Ohm, 4Ghz

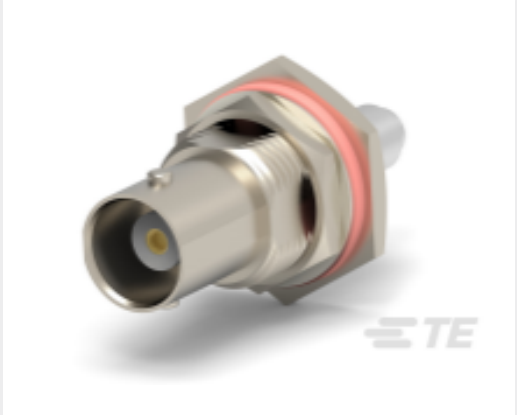

TE Part # 5413771-3
JACK BLKHD,COML BNC,HEX CRIMP



TE Part # 5227079-6
COMM. BNC-PLUG



TE Part # 1-5221128-0
PLUG,COMMERCIAL BNC



TE Part # 1-329631-2
JAM NUT, PLATED



TE Part # 1-5227079-6
COMM BNC PLUG



TE Part # 5413779-3
COML BNC,50 OHM, HEX CRIMP



TE Part # 5227169-7
BNC SOLDER JACK RECEPTACLE


Customers Also Bought




TE Part #5788801-1
25 HTMSFL ASSY RA 318 (SL,BL)



TE Part #1744037-3
03P EC PWR.200 CL HDR ASSY VRT

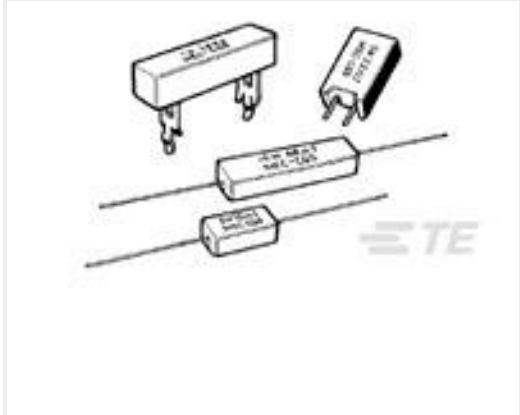

TE Part #1-1623795-6
SQP10 6R8 5% WIRE

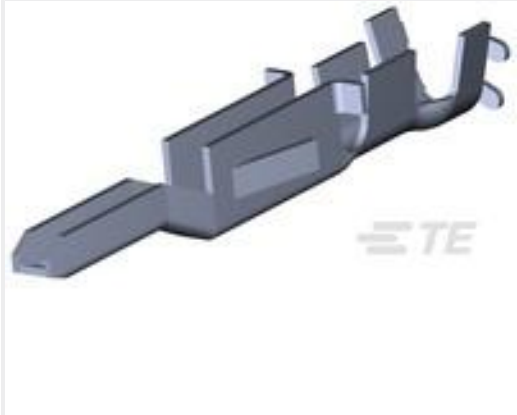

TE Part #2238022-1
VAL-U-LOK PIN BR SN 26-22 LP






TE Part #5749232-1
Mini DIN, 8 pos, R/A, Shield



TE Part #9-2176422-7
TLRP 2512 3.0W R180 1% 75PPM 4K RL



TE Part #1-2176057-4
RLP73M 3A R036 1% 1K RL

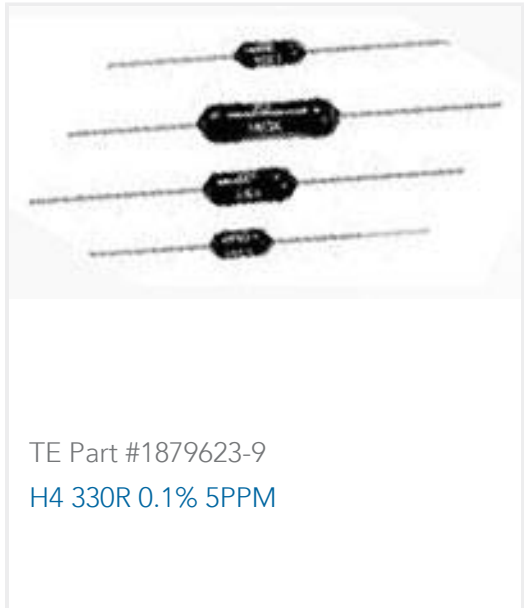

TE Part #1879623-9
H4 330R 0.1% 5PPM



TE Part #2273034-1
M12 x 1.0 straight plug pigt A



TE Part #1-5102321-1
A/L UNIV HDR 60P VERT LAT

Documents

Product Drawings
RTANG JK W/MTG PINS, BNC PCB
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_5227161-2_B.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_5227161-2_B.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_5227161-2_B.3d_stp.zip
English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages
BNC Connectors
English

Product Specifications
Product Specification
English
Product Specification
English

5227161-2

BNC Connector, Jack, 50 ohm, Bayonet, 4 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount, -55 – 85 °C [-67 – 185 °F], Zinc, Nickel



Instruction Sheets

Instruction Sheet (U.S.)

English