


### **PLASTI-GRIP**

TE Internal #: 52291-4

Closed Ring Tongue Terminal, 8 AWG, 5/16 / M8 Stud, 8.33 mm [. 328 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, PLASTI-GRIP

#### View on TE.com >

Terminals & Splices > Ring Terminals

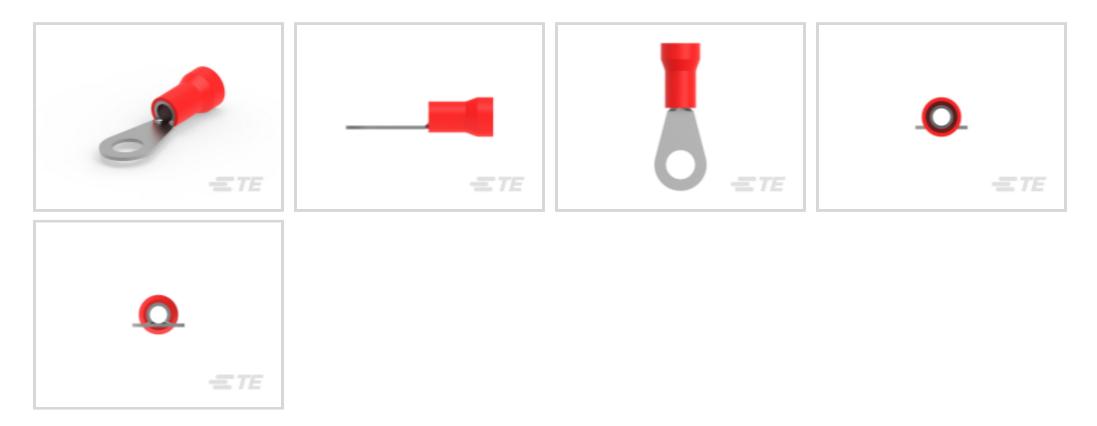

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 13100 – 20800 CMA

Stud Size: 5/16, M8

# Features

# **Product Type Features**

| Ring Terminal Product Type             | Closed Ring Tongue Terminal |  |
|--|-----------------------------|--|
| Stud Size                              | 5/16, M8                    |  |
| Sealable                               | No                          |  |
| Wire Insulation Support Retention Type | Insulation Support          |  |
| Configuration Features                 |                             |  |
| Number of Holes                        | 1                           |  |
| Electrical Characteristics             |                             |  |
| Voltage Rating                         | 600 V                       |  |
| Body Features                          |                             |  |
| Insulation Sleeve Color                | Red                         |  |
| Stripe Color                           | Red                         |  |
| Contact Features                       |                             |  |
| Barrel Type                            | Closed                      |  |
| Terminal Orientation                   | Straight                    |  |
| Terminal Plating Material              | Tin                         |  |



Closed Ring Tongue Terminal, 8 AWG, 5/16 / M8 Stud, 8.33 mm [.328 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, PLASTI-GRIP



## Mechanical Attachment

| Wire Insulation Support               | With                |  |
|---------------------------------------|---------------------|--|
| Dimensions                            |                     |  |
| Wire Size                             | 13100 – 20800 CMA   |  |
| Stud Diameter                         | 8.33 mm[.328 in]    |  |
| Tongue Thickness                      | .79 mm[.031 in]     |  |
| Product Length                        | 43.08 mm[1.696 in]  |  |
| Compatible Insulation Diameter (Max)  | 9.14 mm[.36 in]     |  |
| Compatible Insulation Diameter Range  | 9.14 mm[.36 in]     |  |
| Usage Conditions                      |                     |  |
| Insulation Option                     | Partially Insulated |  |
| Operation/Application                 |                     |  |
| Compatible With Wire Base Material    | Copper              |  |
| Compatible With Wire Plating Material | Tin                 |  |
| Industry Standards                    |                     |  |
| Government Qualified Terminal         | No                  |  |
|                                       |                     |  |

# Packaging Features

Packaging Quantity

Packaging Method

Tape Mounted

500

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant  |  |
|---|--|--|
| EU ELV Directive 2000/53/EC                   | Compliant  |  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold  |  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025<br>(247)<br>Candidate List Declared Against: JUNE<br>2024 (241)<br>Does not contain REACH SVHC |  |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900<br>ppm.  |  |
| Solder Process Capability                     | Not applicable for solder process capability   |  |


Closed Ring Tongue Terminal, 8 AWG, 5/16 / M8 Stud, 8.33 mm [.328 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, PLASTI-GRIP



#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

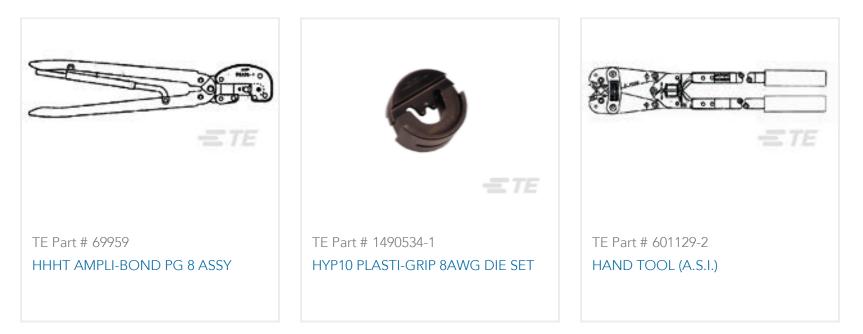

# Also in the Series | PLASTI-GRIP




|                           |                                      |                     | 10 20 20<br>20 20 20<br>20 20 20 |
|---------------------------|--------------------------------------|---------------------|----------------------------------|
| Compression Connectors(3) | Crimp Wire Pins, Tabs & Ferrules(20) | Ring Terminals(310) | Spade Terminals(158)             |



# **Customers Also Bought**

Closed Ring Tongue Terminal, 8 AWG, 5/16 / M8 Stud, 8.33 mm [.328 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, PLASTI-GRIP



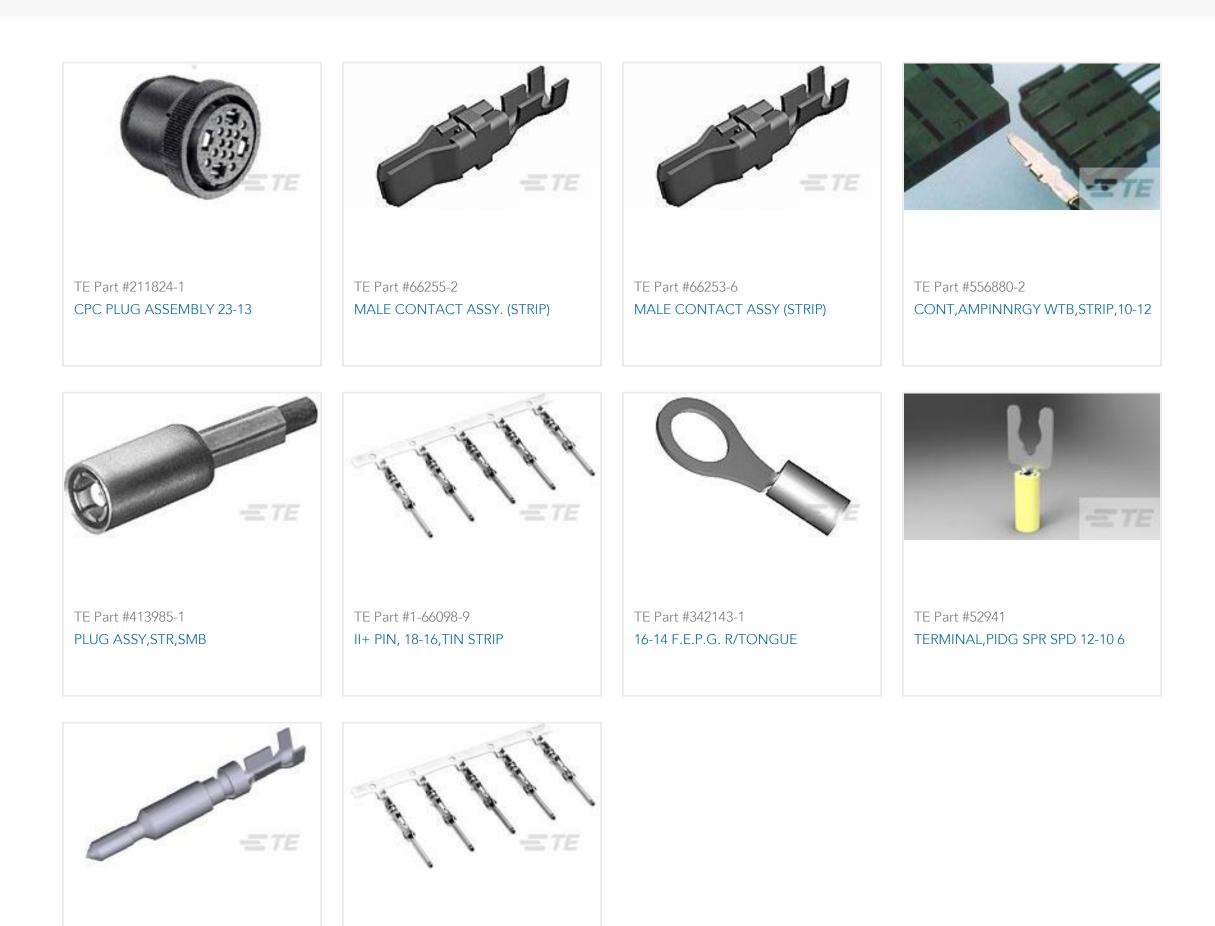

TE Part #770252-1 UMNL II PIN PTPBR LP 24-18

TE Part #66102-4 III+ PIN,24-20,30AU/FL,STRIP

# Documents

Product Drawings TERMINAL R PG 8 5/16

English

### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_52291-4\_W.2d\_dxf.zip

English

## 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_52291-4\_W.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_52291-4\_W.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# **Product Specifications**

**C** For support call+1 800 522 6752

Closed Ring Tongue Terminal, 8 AWG, 5/16 / M8 Stud, 8.33 mm [.328 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, PLASTI-GRIP



Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English