

#### **PIDG**

TE Internal #: 52423


Spring Spade Terminal, 16 – 14 AWG, M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially

Insulated, PIDG

View on TE.com >



Terminals & Splices > Spade Terminals

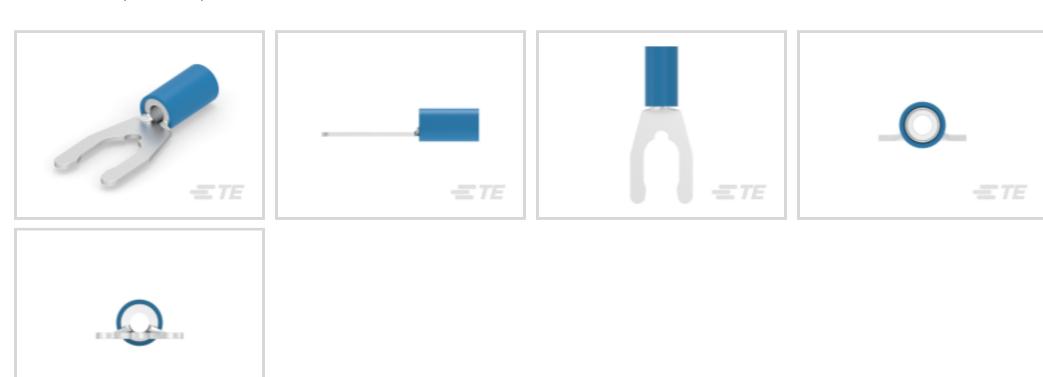

Spade Terminal Type: Spring Spade Terminal

Wire Size: **2050 – 5180 CMA** 

Stud Size: M6

#### **Features**

#### **Product Type Features**

Stud Size	M6
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Electrical Characteristics	
Voltage Rating	300 V
Body Features	
Insulation Sleeve Color	Blue
Stripe Color	Blue
Contact Features	
Spade Terminal Type	Spring Spade Terminal
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	

With

Wire Insulation Support



#### **Dimensions**

Wire Size	2050 – 5180 CMA
Stud Diameter	6.35 mm[.25 in]
Tongue Thickness	.84 mm[.033 in]
Product Length	27.99 mm[1.102 in]
Compatible Insulation Diameter (Max)	3.81 mm[.15 in]
Compatible Insulation Diameter Range	2.67 – 3.81 mm[.105 – .15 in]

### **Usage Conditions**

Insulation Option	Partially Insulated
-------------------	---------------------

### Operation/Application

Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin

### **Industry Standards**

Government Qualified Terminal No	Government Qualified Terminal	No	
----------------------------------	-------------------------------	----	--

#### **Packaging Features**

Packaging Quantity	5000
Packaging Method	Loose Piece

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## Compatible Parts









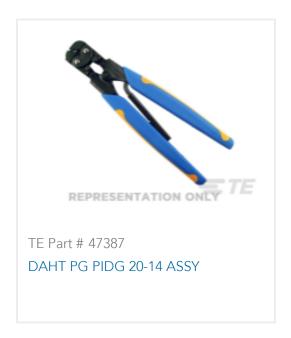

## Also in the Series | PIDG







Crimp Wire Pins, Tabs & Ferrules(41)




Hand Crimping Tools(2)



Knife Disconnects(11)



Ring Terminals(588)

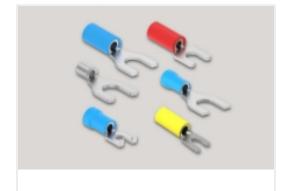

Spade Terminals(228)



Special Purpose Terminals(1)



Splices(41)



# Customers Also Bought





















#### **Documents**

**Product Drawings** 

TERM. PIDG SPR SPD 16-14, 1/4

English

#### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_52423\_J.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_52423\_J.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_52423\_J.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Spring Spade Terminal, 16 – 14 AWG, M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PIDG



**Instruction Sheets** 

Instruction Sheet (U.S.)

English

Agency Approvals

**UL Report** 

English