


TE Internal #: 52929-1 Spring Spade Terminal, 22 – 16 AWG, #6 / M3.5 Stud, 3.56 mm [.14 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated

### View on TE.com >

Terminals & Splices > Spade Terminals > PIDG Short Spring Spade Tongue Terminals

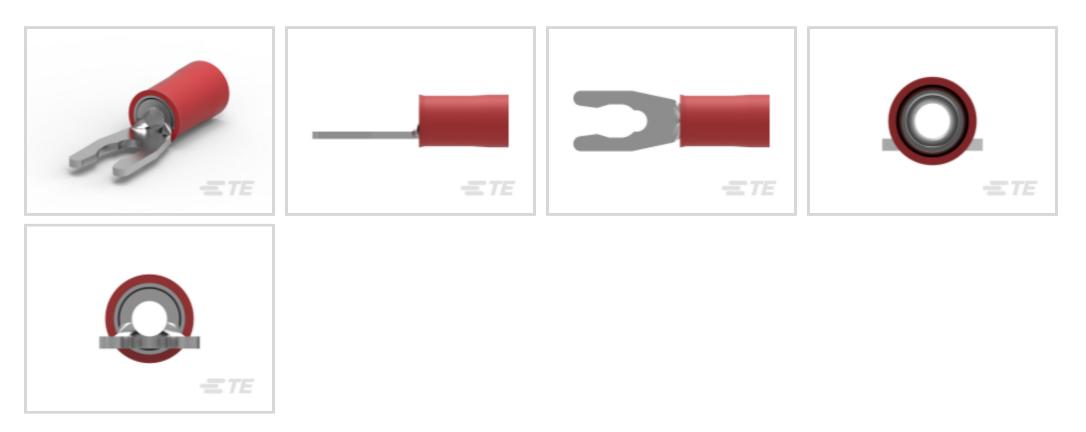

Spade Terminal Type: Spring Spade Terminal

Wire Size: 509 – 3260 CMA

Stud Size: #6, M3.5

All PIDG Short Spring Spade Tongue Terminals (38)

# Features



Product Type Features						
Stud Size	#6, M3.5					
Sealable	No					
Wire Insulation Support Retention Type	Insulation Support					
Electrical Characteristics						
Voltage Rating	300 V					
Body Features						
Insulation Sleeve Color	Red					
Stripe Color	Red					
Contact Features						
Spade Terminal Type	Spring Spade Terminal					
Barrel Type	Closed					
Terminal Orientation	Straight					
Terminal Plating Material	Tin					
Mechanical Attachment						

**C** For support call+1 800 522 6752

04/14/2025 01:38PM | Page 1

### 52929-1

Spring Spade Terminal, 22 – 16 AWG, #6 / M3.5 Stud, 3.56 mm [.14 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated



Wire Insulation Support	With				
Dimensions					
Wire Size	509 – 3260 CMA				
Stud Diameter	3.56 mm[.14 in]				
Tongue Thickness	.79 mm[.031 in]				
Product Length	20.3 mm[.799 in]				
Compatible Insulation Diameter (Max)	3.18 mm[.125 in]				
Compatible Insulation Diameter Range	2.03 – 3.18 mm[.08 – .125 in]				
Usage Conditions					
Insulation Option	Partially Insulated				
Operation/Application					
Compatible With Wire Base Material	Copper				
Compatible With Wire Plating Material	Tin				
Industry Standards					
Government Qualified Terminal	No				
Packaging Features					
Packaging Quantity	5000				

Packaging Method

# Tape Mounted

# Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant		
EU ELV Directive 2000/53/EC	Compliant		
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold		
EU REACH Regulation (EC) No. 1907/2006	<ul> <li>Current ECHA Candidate List: JAN 2025 (247)</li> <li>Candidate List Declared Against: JAN 2025 (247)</li> <li>Does not contain REACH SVHC</li> <li>Low Halogen - Br, Cl, F, I &lt; 900 ppm per homogenous material. Also BFR/CFR/PVC Free</li> </ul>		
Halogen Content			
Solder Process Capability	Not applicable for solder process capability		
Product Compliance Disclaimer			

**C** For support call+1 800 522 6752


### 52929-1

Spring Spade Terminal, 22 – 16 AWG, #6 / M3.5 Stud, 3.56 mm [.14 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

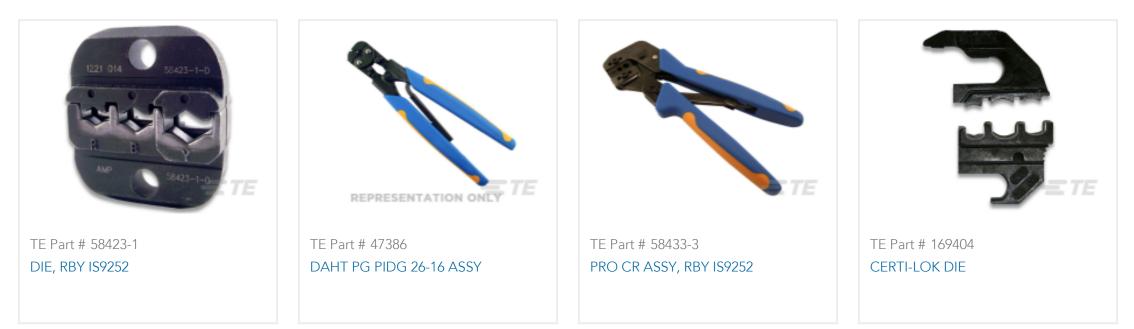

# Customers Also Bought









= TE	TE		THE TE
TE Part #1-327717-2	TE Part #1-280079-2	TE Part #2-1617039-3	TE Part #6643281-1
PIDG SPD 22-16 COMM 22-18MIL 4	250 FASTON,REC.,14-17AWG,TPBR	HMS1201S108M = M39016/44-008M	ICCON,PIN,ASSY
¥ E 75		= TE	
TE Part #1-52929-0	TE Part #2-36153-2	TE Part #350079-4	TE Part #1-1761609-5
TERMINAL,PIDG SPR SPD 22-16 6	PIDG R 22-16 COMM 22-18 MIL 10	CMNL PIN 30-22 PTPHBZ	IDC LOW PRO HDR 50P RA SHT LAT

### 52929-1

Spring Spade Terminal, 22 – 16 AWG, #6 / M3.5 Stud, 3.56 mm [.14 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated





# Documents

## Product Drawings PIDG SP SPD 22-16COMM22-18MIL6

English

### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_52929-1\_Z.2d\_dxf.zip

English

### 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_52929-1\_Z.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_52929-1\_Z.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Instruction Sheets** 

AMP\* PIDG\* (VINYL) & PLASTI-GRIP\* SHORT SPRING SPADE TERMINALS FOR BAR

English

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English

Agency Approvals UL Report

English