


PLASTI-GRIP

TE Internal #: 52951-1 Spring Spade Terminal, 22 – 16 AWG, #10 Stud, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PLASTI-GRIP

View on TE.com >

Terminals & Splices > Spade Terminals

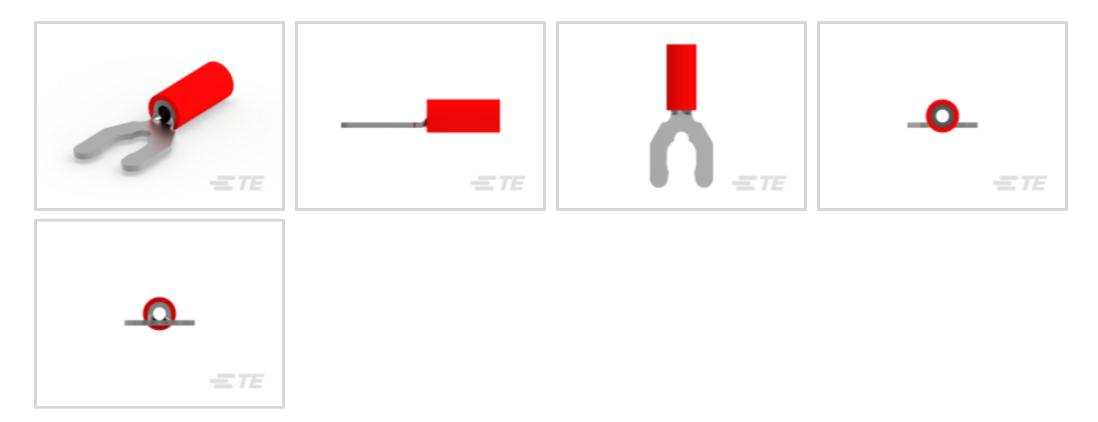

Spade Terminal Type: Spring Spade Terminal

Wire Size: 509 – 3260 CMA

Stud Size: **#10**

Features

Product Type Features



Stud Size	#10							
Sealable	No							
Wire Insulation Support Retention Type	Insulation Support							
Electrical Characteristics								
Voltage Rating	600 V							
Body Features								
Insulation Sleeve Color	Red							
Stripe Color	Red							
Contact Features								
Spade Terminal Type	Spring Spade Terminal							
Barrel Type	Closed							
Terminal Orientation	Straight							
Terminal Plating Material	Tin							
Mechanical Attachment								
Wire Insulation Support	With							

Spring Spade Terminal, 22 – 16 AWG, #10 Stud, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PLASTI-GRIP



Dimensions

Wire Size	509 – 3260 CMA							
VVITE SIZE	JU7 - JZOU CIVIA							
Stud Diameter	4.82 mm[.19 in]							
Tongue Thickness	.79 mm[.031 in]							
Product Length	23.39 mm[.92 in]							
Compatible Insulation Diameter (Max)	3.56 mm[.14 in]							
Compatible Insulation Diameter Range	2.67 – 3.56 mm[.105 – .14 in]							
Usage Conditions								
Insulation Option	Partially Insulated							
Operation/Application								
Compatible With Wire Base Material	Copper							
Compatible With Wire Plating Material	Tin							
Industry Standards								
Industry Standards								
Industry Standards Government Qualified Terminal	No							
	No							
Government Qualified Terminal	No 5000							

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

Spring Spade Terminal, 22 – 16 AWG, #10 Stud, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PLASTI-GRIP



chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Also in the Series | PLASTI-GRIP




Compression Connectors(3)	Crimp Wire Pins, Tabs & Ferrules(20)	Ring Terminals(310)	Spade Terminals(158)



Customers Also Bought

Spring Spade Terminal, 22 – 16 AWG, #10 Stud, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PLASTI-GRIP



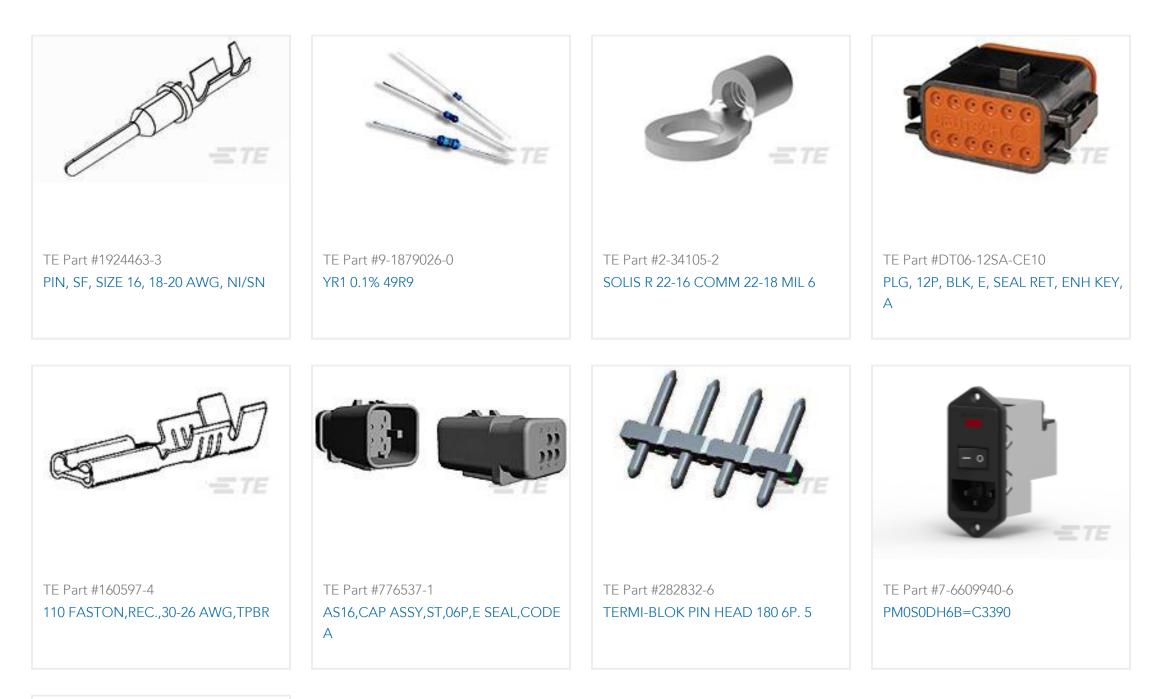



TE Part #CAT-H3910-B128 DEUTSCH HD10 Backshells

Documents

Product Drawings PG SPR SPD 22-16COM22-18MIL 10

English

CAD Files

Customer View Model ENG_CVM_CVM_52951-1_S.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_52951-1_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_52951-1_S.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

C For support call+1 800 522 6752

Spring Spade Terminal, 22 – 16 AWG, #10 Stud, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PLASTI-GRIP



Application Specification

English

Instruction Sheets

AMP* PIDG* (VINYL) & PLASTI-GRIP* SHORT SPRING SPADE TERMINALS FOR BAR

English

Instruction Sheet (U.S.)

English