


PLASTI-GRIP

TE Internal #: 52963-5 Spring Spade Terminal, 12 – 10 AWG, #10 Stud, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PLASTI-GRIP

View on TE.com >

Terminals & Splices > Spade Terminals

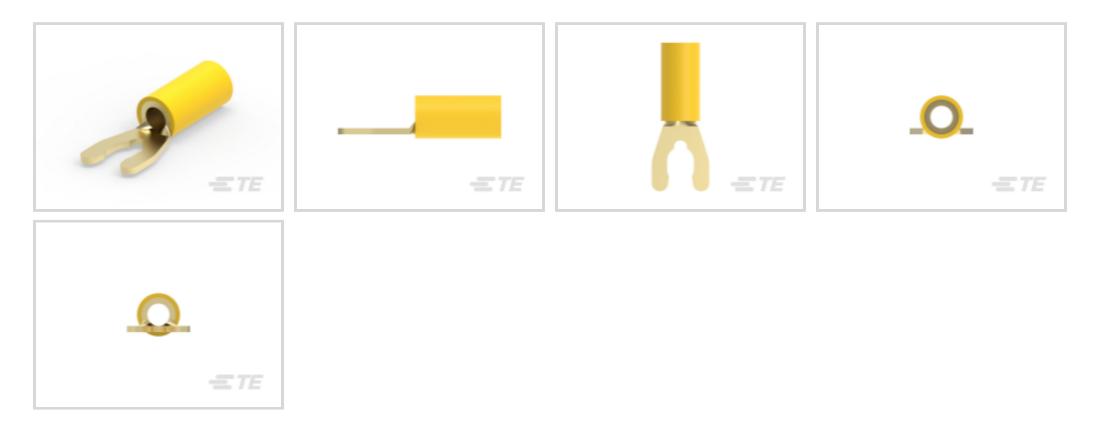

Spade Terminal Type: Spring Spade Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: **#10**

Features

Product Type Features



Stud Size	#10							
Sealable	No							
Wire Insulation Support Retention Type	Insulation Support							
Electrical Characteristics								
Voltage Rating	600 V							
Body Features								
Insulation Sleeve Color	Yellow							
Stripe Color	Yellow							
Contact Features								
Spade Terminal Type	Spring Spade Terminal							
Barrel Type	Closed							
Terminal Orientation	Straight							
Terminal Plating Material	Tin							
Mechanical Attachment								
Wire Insulation Support	With							

Spring Spade Terminal, 12 – 10 AWG, #10 Stud, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PLASTI-GRIP



Dimensions

Wire Size	5180 – 13100 CMA						
Stud Diameter	4.82 mm[.19 in]						
Tongue Thickness	.99 mm[.039 in]						
Product Length	40.39 mm[1.59 in]						
Compatible Insulation Diameter (Max)	7.62 mm[.3 in]						
Compatible Insulation Diameter Range	6.35 – 7.62 mm[.25 – .3 in]						
Usage Conditions							
Insulation Option	Partially Insulated						
Operation/Application							
Compatible With Wire Base Material	Copper						
Compatible With Wire Plating Material	Tin						
Industry Standards							
Government Qualified Terminal	No						
Packaging Features							
Packaging Quantity	1500						
Packaging Method	Tape Mounted						

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

Spring Spade Terminal, 12 – 10 AWG, #10 Stud, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PLASTI-GRIP



chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



TE Part # 567200-3 APPL,HDM,TAPE 9CB W/O DIES G

Also in the Series | PLASTI-GRIP




Compression Connectors(3)	Crimp Wire Pins, Tabs & Ferrules(20)	Ring Terminals(310)	Spade Terminals(158)



Customers Also Bought

Spring Spade Terminal, 12 – 10 AWG, #10 Stud, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PLASTI-GRIP



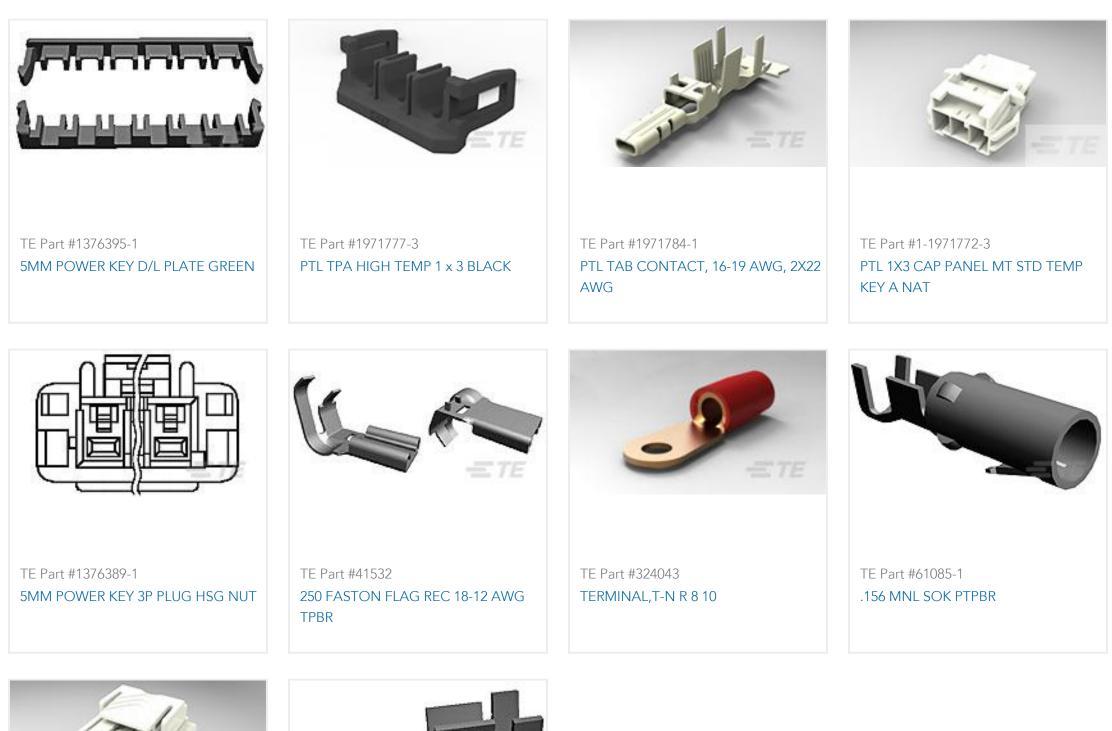



TE Part #1-1971773-3 PTL 1X3 PLUG HSG STD TEMP KEY A NAT



TE Part #40696 RING TERMINAL 12-10 AWG TPBR

Documents

Product Drawings TERMINAL, PG SPR SPD 12-10 10

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_52963-5_AC.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_52963-5_AC.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_52963-5_AC.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

C For support call+1 800 522 6752

Spring Spade Terminal, 12 – 10 AWG, #10 Stud, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PLASTI-GRIP



Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

LARGE EXPANSION PRODUCTS (FOR WIRE INSTULATION WITH 1/16" AND 5/64" WA

English

Agency Approvals

UL Report

English