
532433-7 **~** ACTIVE

AMP-HDI

TE Internal #: 532433-7 PCB Mount Header, Vertical, Board-to-Board, 150 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold (Au), Through Hole -Solder, Signal, Black

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

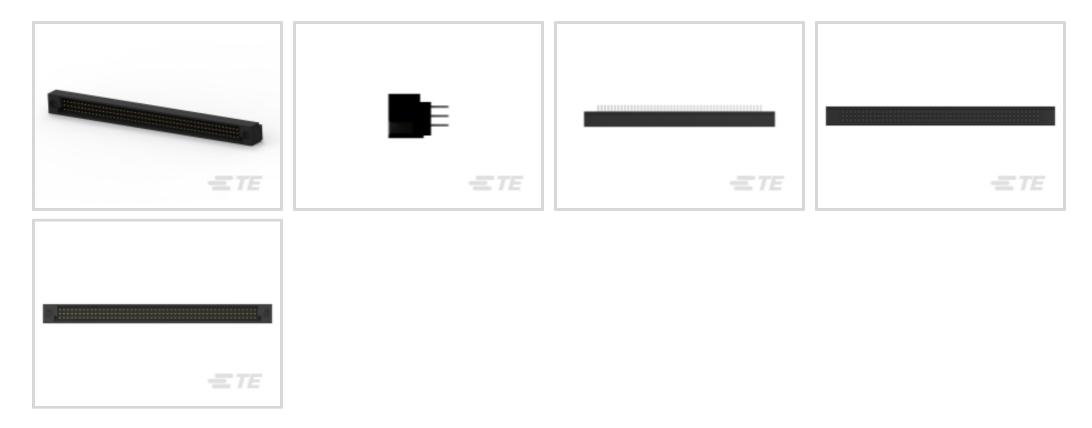

PCB Connector Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 150

Number of Rows: 3

Features

connectivity

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly
Configuration Features	
Stackable	No
Stackable PCB Mount Orientation	No Vertical
PCB Mount Orientation	Vertical
PCB Mount Orientation Number of Positions	Vertical 150
PCB Mount Orientation Number of Positions Number of Rows	Vertical 150

PCB Mount Header, Vertical, Board-to-Board, 150 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold (Au), Through Hole - Solder, Signal, Black



Primary Product Color	Black
Contact Features	
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Mating Square Post Dimension	.64 mm[.025 in]
Contact Shape & Form	Four Beam
Contact Layout	Matrix
Contact Mating Area Length	5.33 mm
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Pin
Contact Current Rating (Max)	3 A
ermination Features	
Termination Post & Tail Length	4.83 mm[.19 in]
Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Keyed	
PCB Mount Retention	Without	
PCB Mount Alignment	Without	
Connector Mounting Type	Board Mount	
Mating Alignment	Without	
Housing Features		
Housing Material	Thermoplastic	
Centerline (Pitch)	2.54 mm[.1 in]	
Dimensions		
PCB Thickness (Recommended)	1.57 mm[.76 in]	
Connector Height	11.73 mm[.46 in]	
Usage Conditions		
Housing Temperature Rating	High	
Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]	
Operation/Application		

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 150 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold (Au), Through Hole - Solder, Signal, Black



Solder Process Feature	Board Standoff
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	4
Packaging Method	Tube
For compliance documentation, visit the product page on TE.com>	
FU RoHS Directive 2011/65/FU	Not Compliant
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Not Compliant Compliant with Exemptions
	Not CompliantCompliant with ExemptionsRestricted Materials Above Threshold

Halogen Content

Solder Process Capability

Alticle Sale Usage Statements.

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not lead free process capable

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

PCB Mount Header, Vertical, Board-to-Board, 150 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold (Au), Through Hole - Solder, Signal, Black





Customers Also Bought



24 SYSTEM 50 HDR DRST SHRD	LSAW-2C-12B = 1/2 LATCH 2 POLE	TERMINAL, PIDG SPR SPD 26-22 6	STM025M6IQ = THRU-HOLE
TE Part #5-146256-2 04 MODII HDR DRST B/A .100CL LF	TE Part #7-1589488-5 STM065M5PQ = Thru-Hole		

Documents

Product Drawings HDI PIN ASSY 3 ROW 150 POS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_532433-7_T.2d_dxf.zip

PCB Mount Header, Vertical, Board-to-Board, 150 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold (Au), Through Hole - Solder, Signal, Black



English

Customer View Model ENG_CVM_CVM_532433-7_T.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_532433-7_T.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773957-5_AMP_HDI_BTB_CONNECTORS_EN

English

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals Agency Approval Document

English