532434-7 - ACTIVE

## AMP-HDI

TE Internal #: 532434-7 PCB Mount Receptacle, Right Angle, Board-to-Board, 200 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Natural, Tube

## View on TE.com >

### Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: PCB Mount Receptacle

PCB Mount Orientation: Right Angle

Connector System: Board-to-Board

Number of Positions: 200

Number of Rows: 4

# Features



# Product Type Features

PCB Connector Type	PCB Mount Receptacle				
Connector System	Board-to-Board				
Sealable	No				
Connector & Contact Terminates To	Printed Circuit Board				
Connector Product Type	Connector Assembly				
Configuration Features					
Stackable	No				
PCB Mount Orientation	Right Angle				
Number of Positions	200				
Number of Rows	4				
Electrical Characteristics					
Insulation Resistance	4 ΜΩ				
Body Features					
Primary Product Color	Natural				

**C** For support call+1 800 522 6752

PCB Mount Receptacle, Right Angle, Board-to-Board, 200 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Natural, Tube



## **Contact Features**

Mating Square Post Dimension	.64 mm[.025 in]
Contact Shape & Form	Four Beam
Contact Layout	Matrix
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Socket
Contact Current Rating (Max)	3 A
Termination Features	
Rectangular Termination Post & Tail Width	.58 mm[.023 in]
Rectangular Termination Post & Tail Thickness	.25 mm[.01 in]
Termination Post & Tail Length	4.57 mm[.18 in]
Termination Method to PCB	Through Hole - Solder
Mechanical Attachment	
Mating Alignment Type	Keyed
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Mating Alignment	Without
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Connector Height	11.68 mm[.46 in]
Usage Conditions	
Housing Temperature Rating	High
Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
Operation/Application	
Assembly Process Feature	None
Circuit Application	Signal

PCB Mount Receptacle, Right Angle, Board-to-Board, 200 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Natural, Tube



## **Industry Standards**

UL Flammability Rating	UL 94V-0						
Packaging Features							
Packaging Quantity	4						
Packaging Method	Tube						
Product Compliance							
For compliance documentation, visit the product page on TE.com>							
EU RoHS Directive 2011/65/EU	Not Compliant						
EU ELV Directive 2000/53/EC	Compliant with Exemptions						

China RoHS 2 Directive MIIT Order No 32, 2016

EU REACH Regulation (EC) No. 1907/2006

## . .

Restricted Materials Above Threshold

Current ECHA Candidate List: JAN 2025 (247)

Candidate List Declared Against: JAN 2025

(247)

SVHC > Threshold:

Pb (100% in Component Part)

#### Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

### Solder Process Capability

Not lead free process capable

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

PCB Mount Receptacle, Right Angle, Board-to-Board, 200 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Natural, Tube





# **Customers Also Bought**

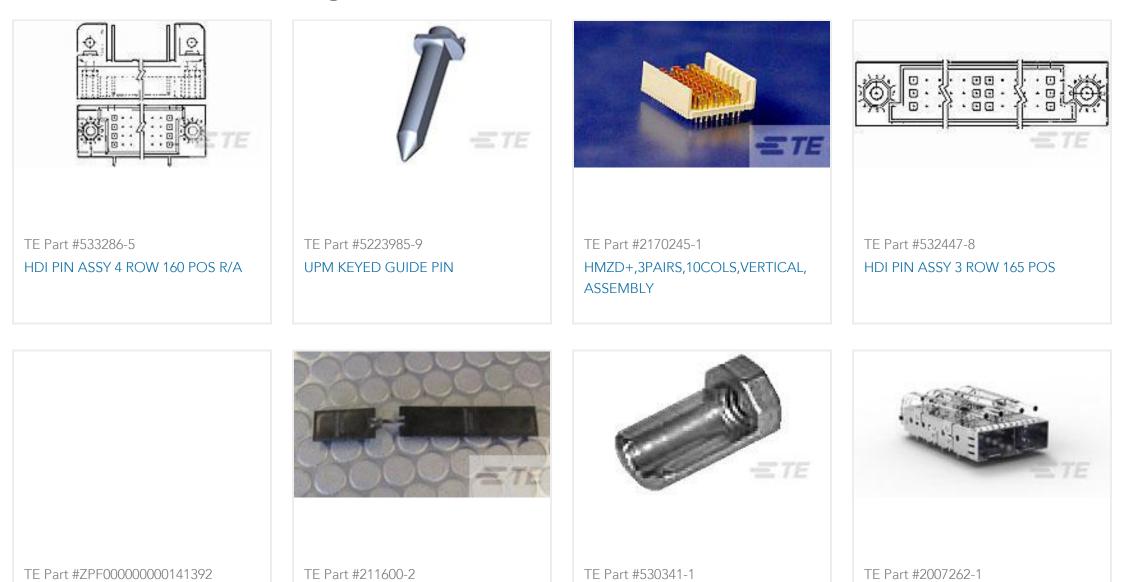

TE Part #2007262-1

DMC-M 45-01	DUST COVER,SZ 2,NIC 600	BOX EST KEY PASSIVATED	SFP+ 1x2 Cage Assembly, Light
TE Part #533268-8 HDI RECP ASSY 3 ROW 165 POS	TE Part #2184474-1 MiniMRP SWSH Encl Ft & Conn(x1)		

# Documents

**Product Drawings** HDI RECP ASSY 4 ROW 200 POS

English

# **CAD** Files

## 3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_532434-7\_R.2d\_dxf.zip

PCB Mount Receptacle, Right Angle, Board-to-Board, 200 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Natural, Tube



English

Customer View Model ENG\_CVM\_CVM\_532434-7\_R.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_532434-7\_R.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773957-5\_AMP\_HDI\_BTB\_CONNECTORS\_EN

English

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals Agency Approval Document

English