


PLASTI-GRIP

TE Internal #: 53246-2 Spring Spade Terminal, 12 – 10 AWG, #6 / M3.5 Stud, 3.56 mm [.14 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, PLASTI-GRIP

View on TE.com >

Terminals & Splices > Spade Terminals

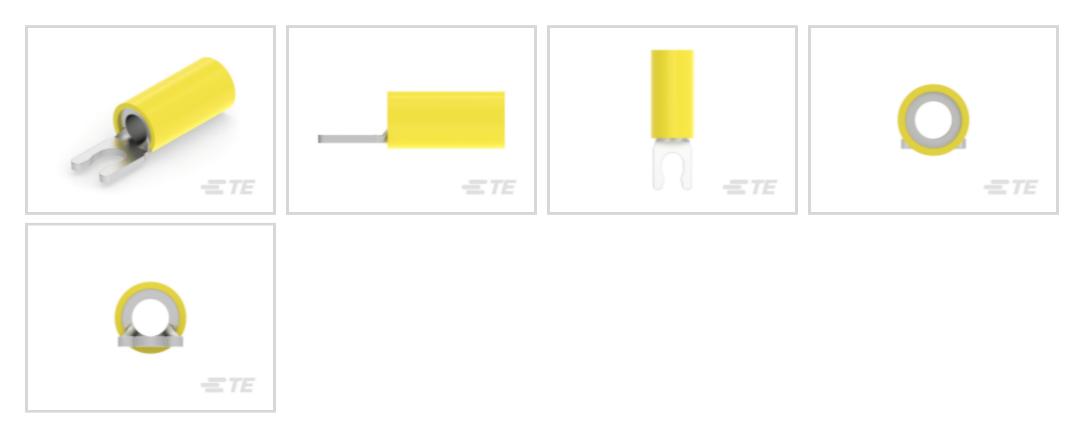

Spade Terminal Type: Spring Spade Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: **#6, M3.5**

Features

Product Type Features

Stud Size



Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Electrical Characteristics	
Voltage Rating	600 V
Body Features	
Insulation Sleeve Color	Yellow
Stripe Color	Yellow
Contact Features	
Spade Terminal Type	Spring Spade Terminal
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	With

Spring Spade Terminal, 12 – 10 AWG, #6 / M3.5 Stud, 3.56 mm [.14 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, PLASTI-GRIP



Dimensions

Wire Size	5180 – 13100 CMA
Stud Diameter	3.56 mm[.14 in]
Tongue Thickness	1.02 mm[.04 in]
Product Length	24.36 mm[.959 in]
Compatible Insulation Diameter (Max)	6.35 mm[.25 in]
Compatible Insulation Diameter Range	3.81 – 6.35 mm[.15 – .25 in]
Usage Conditions	
Insulation Option	Partially Insulated
Operation/Application	
Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	2500
Packaging Method	Tape Mounted

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

Spring Spade Terminal, 12 – 10 AWG, #6 / M3.5 Stud, 3.56 mm [.14 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, PLASTI-GRIP




chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts





Also in the Series | PLASTI-GRIP

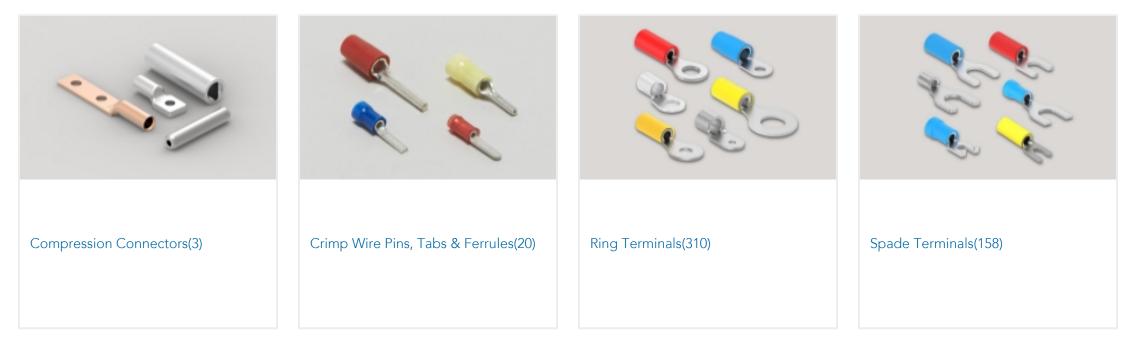



Splices(45)

C For support call+1 800 522 6752

Spring Spade Terminal, 12 – 10 AWG, #6 / M3.5 Stud, 3.56 mm [.14 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, PLASTI-GRIP



Customers Also Bought



TE Part #T4151420004-003 RPC-M12-FR-4CON-PUR-1.5



TE Part #53427-1 TERMINAL, PIDG PVF2 R 12-10



TE Part #BEA120N00000241000 923 RECEPTACLE, SPEEDTEC-READY



-ETE



TE Part #2299286-1

Documents

Product Drawings

TERMINAL, PG SPR SPD 12-10 6

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_53246-2_K.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_53246-2_K.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_53246-2_K.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

S For support call+1 800 522 6752

Spring Spade Terminal, 12 – 10 AWG, #6 / M3.5 Stud, 3.56 mm [.14 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, PLASTI-GRIP



Product Specifications Application Specification

English