


AMP-HDI

TE Internal #: 532903-5 PCB Mount Receptacle, Right Angle, Board-to-Board, 160 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Black, Tube

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

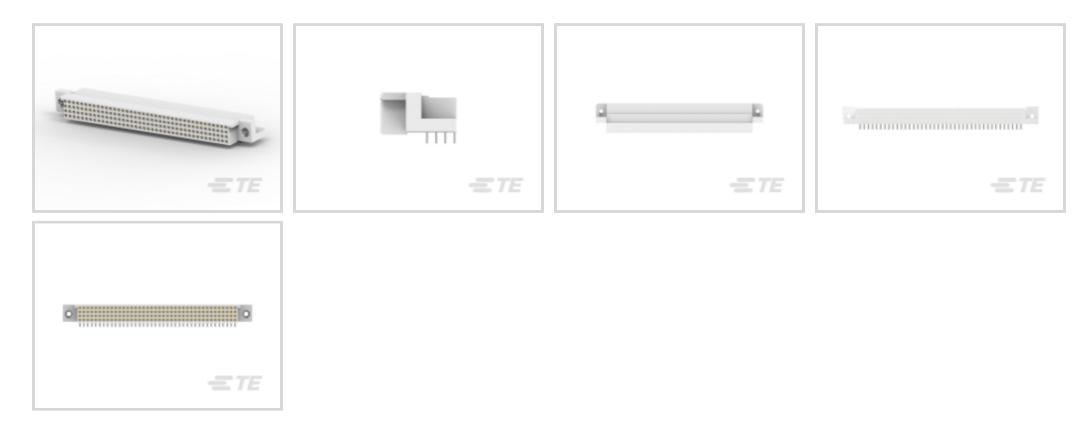

PCB Connector Type: PCB Mount Receptacle

PCB Mount Orientation: Right Angle

Connector System: Board-to-Board

Number of Positions: 160

Number of Rows: 4

Features

connectivity

Product Type Features

| PCB Connector Type | PCB Mount Receptacle |
|-----------------------------------|-----------------------|
| Connector System | Board-to-Board |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |
| Connector Product Type | Connector Assembly |
| Configuration Features | |
| Stackable | No |
| PCB Mount Orientation | Right Angle |
| Number of Positions | 160 |
| Number of Rows | 4 |
| Electrical Characteristics | |
| Insulation Resistance | 4 ΜΩ |
| Body Features | |
| Primary Product Color | Black |

C For support call+1 800 522 6752

PCB Mount Receptacle, Right Angle, Board-to-Board, 160 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Black, Tube



Contact Features

| Contact Mating Area Plating Material Thickness | .76 μm[30 μin] |
|--|-----------------------|
| Mating Square Post Dimension | .64 mm[.025 in] |
| Contact Shape & Form | Four Beam |
| Contact Layout | Matrix |
| Contact Base Material | Copper Alloy |
| PCB Contact Termination Area Plating Material | Tin |
| Contact Mating Area Plating Material | Gold (Au) |
| Contact Type | Socket |
| Contact Current Rating (Max) | 3 A |
| Termination Features | |
| Rectangular Termination Post & Tail Width | .58 mm[.023 in] |
| Rectangular Termination Post & Tail Thickness | .25 mm[.01 in] |
| Termination Post & Tail Length | 3.05 mm[.12 in] |
| Termination Method to PCB | Through Hole - Solder |
| Mechanical Attachment | |
| Mating Alignment Type | Keyed |

| PCB Mount Retention | Without |
|-----------------------------|----------------------------|
| PCB Mount Alignment | Without |
| Connector Mounting Type | Board Mount |
| Mating Alignment | Without |
| Housing Features | |
| Housing Material | Thermoplastic |
| Centerline (Pitch) | 2.54 mm[.1 in] |
| Dimensions | |
| PCB Thickness (Recommended) | 2.36 mm[.76 in] |
| Connector Height | 11.68 mm[.46 in] |
| Usage Conditions | |
| Housing Temperature Rating | High |
| Operating Temperature Range | -65 – 125 °C[-85 – 257 °F] |
| Operation/Application | |
| Assembly Process Feature | None |

C For support call+1 800 522 6752

PCB Mount Receptacle, Right Angle, Board-to-Board, 160 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Black, Tube



| Circuit Application | Signal |
|---|---|
| ndustry Standards | |
| UL Flammability Rating | UL 94V-0 |
| Packaging Features | |
| Packaging Quantity | 4 |
| Packaging Method | Tube |
| EU RoHS Directive 2011/65/EU | Not Compliant |
| EU RoHS Directive 2011/65/EU | Not Compliant |
| EU ELV Directive 2000/53/EC | Compliant with Exemptions |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2023 (223) SVHC > Threshold: Pb (13% in component part) |
| | Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |

Halogen Content

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Not lead free process capable

Solder Process Capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

PCB Mount Receptacle, Right Angle, Board-to-Board, 160 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Black, Tube



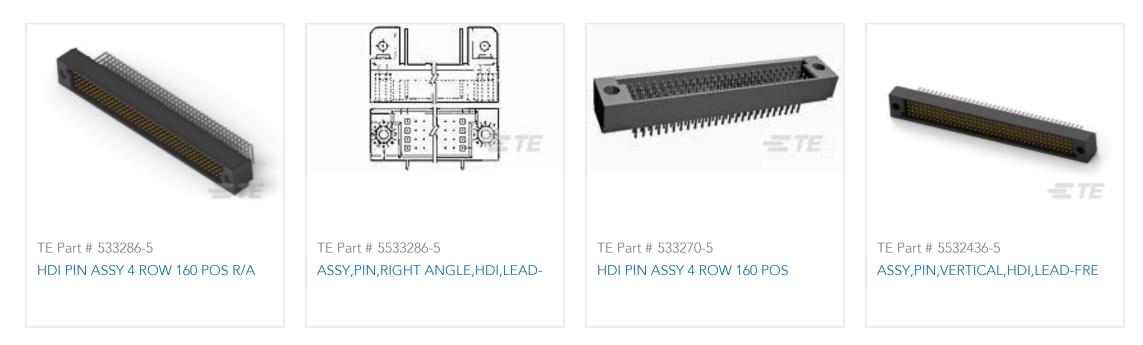



Customers Also Bought



ASSY, PIN, EUROCARD, TYPE R, LEAD-

ASSY,RECEPTACLE,EURO,TYPE C/2,L-FREE,A&C HDI PIN ASSY 4 ROW 160 POS





Documents

PCB Mount Receptacle, Right Angle, Board-to-Board, 160 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Black, Tube



Product Drawings HDI RECP ASSY 4 ROW 160 POS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_532903-5_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_532903-5_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_532903-5_M.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages 1-1773957-5_AMP_HDI_BTB_CONNECTORS_EN

English

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals Agency Approval Document

English