



Connectors > Audio & Video Connectors > USB Connectors



USB Adapter Type: A

USB Version: 2.0

Connector Profile: Standard

Connector & Housing Type: Receptacle

Number of Ports: 1

Features

Product Type Features

|                                   |                                |
|-----------------------------------|--------------------------------|
| Ground Feature Type               | M2 Threaded Hole               |
| Grounding Options                 | Panel Ground                   |
| USB Adapter Type                  | A                              |
| USB Version                       | 2.0                            |
| Connector & Housing Type          | Receptacle                     |
| Connector System                  | Cable-to-Board, Cable-to-Panel |
| Connector & Contact Terminates To | Printed Circuit Board          |
| USB Connector Type                | USB 2.0 Type-A                 |

Configuration Features

|                         |            |
|-------------------------|------------|
| Panel Ground Location   | Right/Left |
| Number of Mounting Legs | 2          |
| Number of Ports         | 1          |
| Number of Positions     | 4          |

Body Features

|  |  |
|--|--|
|  |  |
|--|--|



|                        |                 |
|------------------------|-----------------|
| Shell Plating Finish   | Bright          |
| Shell Plating Material | Tin over Nickel |
| Offset                 | 4 mm            |
| Connector Profile      | Standard        |

Contact Features

|                                                |                                          |
|------------------------------------------------|------------------------------------------|
| Contact Mating Area Plating Material Thickness | .76 µm[29.92 µin]                        |
| Contact Mating Area Plating Material           | Gold or Gold Flash over Palladium Nickel |
| Contact Current Rating (Max)                   | 1 A                                      |

Termination Features

|                                |                  |
|--------------------------------|------------------|
| Termination Post & Tail Length | 1.85 mm[.073 in] |
| Termination Method to PCB      | Surface Mount    |

Mechanical Attachment

|                          |                          |
|--------------------------|--------------------------|
| Locking Feature          | With                     |
| PCB Mount Alignment Type | Locating Posts           |
| PCB Mount Location       | Top                      |
| PCB Connector Seating    | Offset                   |
| PCB Mount Retention Type | SMT Hold-Down            |
| Panel Mount Feature Type | Flange                   |
| Connector Mounting Type  | Board Mount, Panel Mount |

Housing Features

|                    |                                |
|--------------------|--------------------------------|
| Housing Color      | White                          |
| Housing Material   | Thermoplastic                  |
| Body Orientation   | Right Angle                    |
| Centerline (Pitch) | 2 mm, 2.5 mm[.078 in][.098 in] |

Dimensions

|                             |               |
|-----------------------------|---------------|
| PCB Thickness (Recommended) | 1 mm[.039 in] |
|-----------------------------|---------------|

Usage Conditions

|                             |                           |
|-----------------------------|---------------------------|
| Soldering Temperature (Max) | 260 °C[500 °F]            |
| Mating Cycles (Max)         | 1500                      |
| Operating Temperature Range | -55 – 85 °C[-67 – 185 °F] |

Operation/Application

|              |    |
|--------------|----|
| Halogen Free | No |
|--------------|----|



|                          |                      |
|--------------------------|----------------------|
| Assembly Process Feature | Pick and Place Cover |
| Circuit Application      | Power & Signal       |

Industry Standards

|                            |          |
|----------------------------|----------|
| Industry Standard          | USB 2.0  |
| Moisture Sensitivity Level | 1        |
| Test Identification (TID)  | 60000276 |
| UL Flammability Rating     | UL 94V-0 |

Packaging Features

|                    |             |
|--------------------|-------------|
| Packaging Quantity | 350         |
| Packaging Method   | Tape & Reel |

Product Compliance

For compliance documentation, visit the product page on TE.com>


|                                               |                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                      |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                      |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JUNE 2022 (224)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                            |
| Solder Process Capability                     | Wave solder capable to 265°C                                                                                                   |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



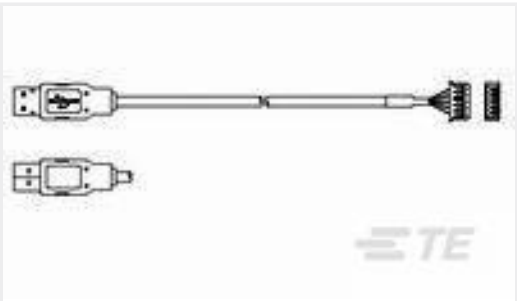


TE Part # 2142872-1  
cable assy, usb a plug to 5p hsg



TE Part # 1487595-3  
USB, A-B, 28/26, BLACK, .83M




TE Part # 1827525-1  
MECHATROLINK II CONNECTOR KIT

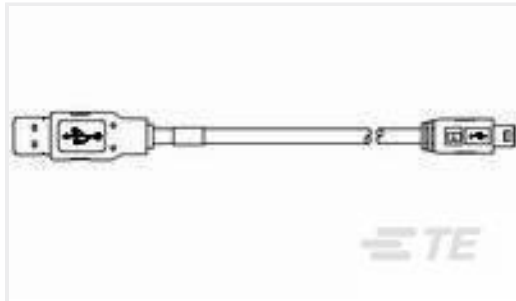

TE Part # 1929690-1  
USB CABLE, USB A to Mini USB,Blue



TE Part # 1487595-2  
USB, A-B, 28/26, BLACK, 1.3M

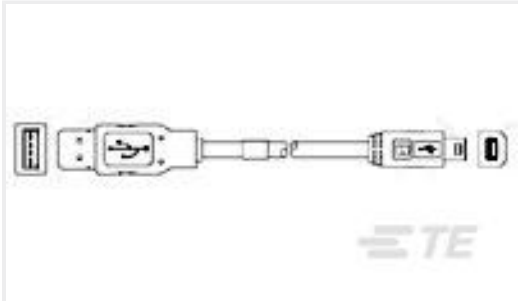

TE Part # 1487588-3  
USB, A-B, 28/24, WHITE, 1.8M



TE Part # 1487593-1  
USB, A-BLUNT,28/24,WHT,2.0M



TE Part # 1-1734028-1  
Std USB, Type A, Plug, Natural



TE Part # 1487600-1  
USB, A-BLUNT,28/26,BLK,1.0M



TE Part # 1734028-1  
Std USB Type A, Plug, Natural




TE Part # 1-1734028-3  
Std USB, Type A, Plug



TE Part # 1487594-3  
USB, A-B, 28/28, BLACK, 0.16M



TE Part # 1487593-2  
USB, A-BLUNT,28/24,WHT,1.5M

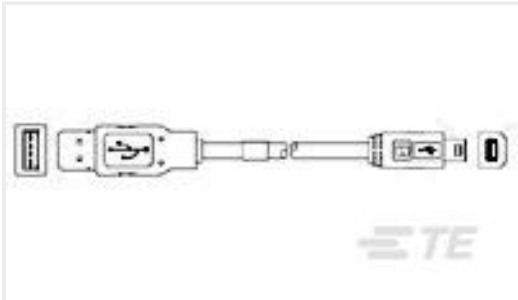

TE Part # 1496476-1  
STD USB-A TO MINI-B ASSY, 1M



TE Part # 1487588-2  
USB, A-B, 28/24, WHITE, 1.5M



TE Part # 1487594-2  
USB, A-B, 28/28, BLACK, 0.25M



TE Part # 1487595-1  
USB, A-B, 28/26, BLACK, 1.0M




TE Part # 1487594-1  
USB, A-B, 28/28, BLACK, 0.5M




TE Part # 1487599-1  
USB, A-BLUNT,28/28,BLK,0.83M

Customers Also Bought




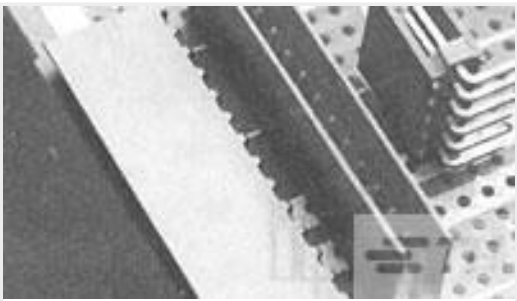

TE Part #281698-4  
[HEADER HE14 RA 4 P](#)

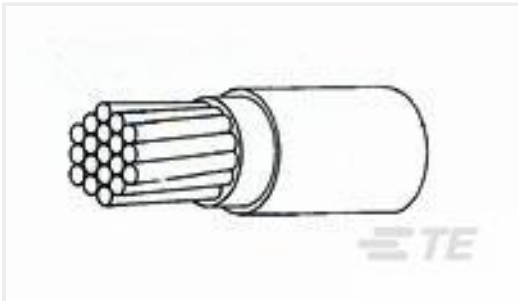

TE Part #2813813003  
[44/7031-20-0](#)

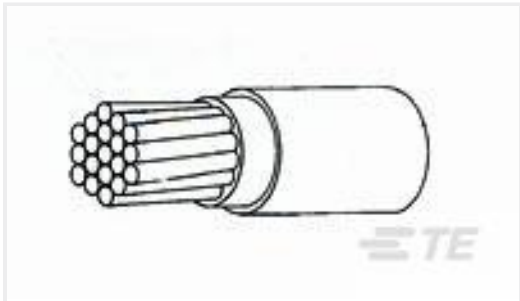


TE Part #2813803003  
[44/7031-20-9](#)



TE Part #2-1416010-6  
[RE034012](#)



TE Part #5070112026  
[RNF-100-1-1/2-X-STK](#)

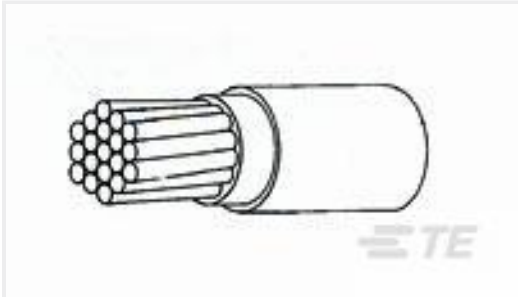


TE Part #2800313002  
[44/7031-20-2](#)



TE Part #1888250-3  
[Low Profile,RJ45,1x1,No Led's](#)



TE Part #4-1879128-1  
[RN 0402 750R 0.1% 10PPM 1K RL](#)

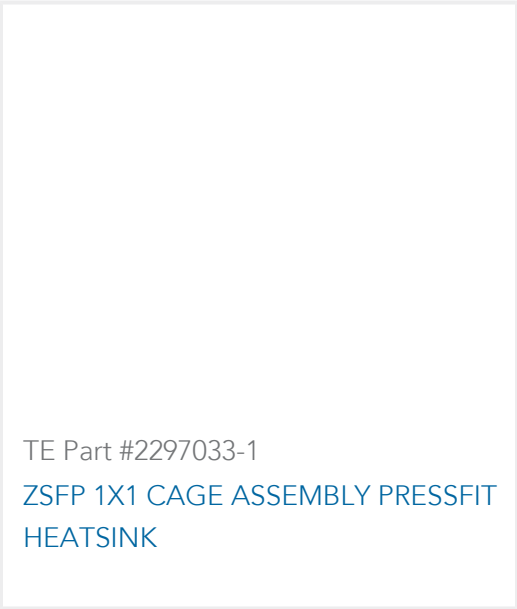

TE Part #2297033-1  
[ZSFP 1X1 CAGE ASSEMBLY PRESSFIT HEATSINK](#)



TE Part #1-5174053-2  
[040 MLC CAP H ASSY 16P GOLD](#)

Documents

CAD Files

3D PDF

English

Customer View Model

[ENG\\_CVM\\_5353929-1\\_O.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_5353929-1\\_O.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_5353929-1\\_O.2d\\_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_5353929-1\\_A.2d\\_dxf.zip](#)

English

Customer View Model



[ENG\\_CVM\\_CVM\\_5353929-1\\_A.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_5353929-1\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

**Datasheets & Catalog Pages**

[USB and Mini USB Datasheet 7-1773442-0](#)

English

**Product Specifications**

[Product Specification](#)

English

**Product Specification**

English

[AMP Universal Serial Bus\(USB\) Receptacle Connectors\(Type A, SMT\)](#)

English