
5406721-1 - ACTIVE

TE Internal #: 5406721-1 RJ45 Connector, Single Port, 1 x 1, Jack, Cat 5, Inverted - Latch Up, 8 Position, Low Profile, Surface Mount, Right Angle, Side Entry, None

View on TE.com >

connectivity

Connectors > Modular Jacks & Plugs > RJ45 Connectors

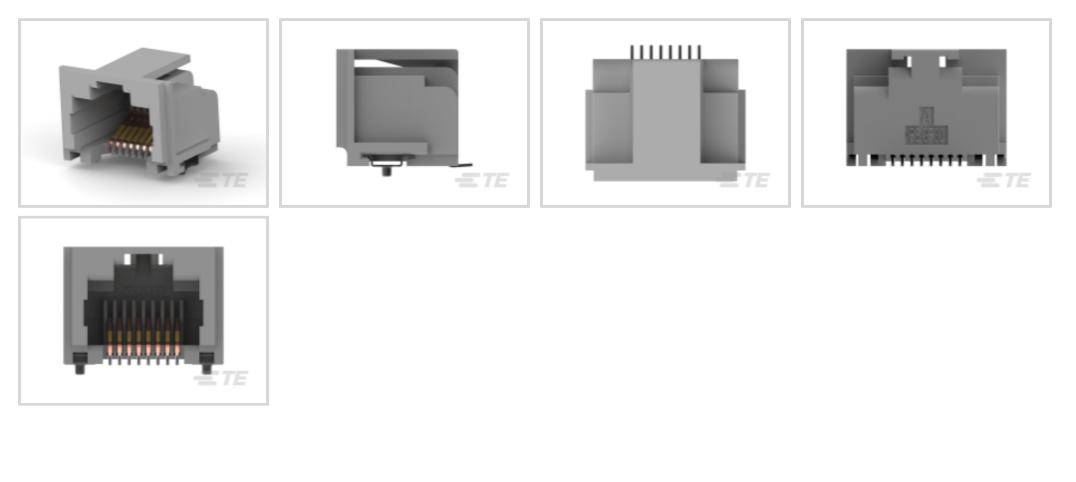

Modular Jack & Plug Interface Type: RJ45 Port Configuration: Single Port Port Matrix Configuration: 1 x 1 Modular Jacks & Plugs Products: RJ Type Jacks & Plugs Connector Contact Density: Standard

Features

Product Type Features

Connector Product Type	Connector Assembly
Modular Jack & Plug Interface Type	RJ45
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Grounding Options	None
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Port Configuration	Single Port
Port Matrix Configuration	1 x 1
Connector Contact Density	Standard
Number of Positions	8
Number of Loaded Positions	8
PCB Mount Orientation	Right Angle
Body Features	

RJ45 Connector, Single Port, 1 x 1, Jack, Cat 5, Inverted - Latch Up, 8 Position, Low Profile, Surface Mount, Right Angle, Side Entry, None



PCB Retention Feature Material	Phosphor Bronze
Modular Jack Latch Orientation	Inverted - Latch Up
Connector Profile	Low
Contact Features	
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Termination Features	
Termination Method to PCB	Surface Mount
Termination Post & Tail Length	1.52 mm[.059 in]
Mechanical Attachment	
Panel Mount Feature	With
Panel Mount Feature Type	Panel Stops
PCB Mount Retention Type	Boardlock
Connector Mounting Type	Board Mount, Panel Mount

Housing Features

Mating Entry Location	Side
Centerline (Pitch)	1.02 mm[.04 in]
Housing Color	Gray
Housing Material	High Temperature Thermoplastic
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
Connector Height	12.4 mm[.488 in]
Usage Conditions	
Operating Temperature Range	-40 – 70 °C[-40 – 158 °F]
Operation/Application	
Indicator Type	No Indicator
Shielded	No
Shielded Circuit Application	No Signal

RJ45 Connector, Single Port, 1 x 1, Jack, Cat 5, Inverted - Latch Up, 8 Position, Low Profile, Surface Mount, Right Angle, Side Entry, None



UL Flammability Rating	UL 94V-0
Performance Category	Cat 5
Packaging Features	
Packaging Quantity	650
Packaging Method	Tape & Reel
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 245°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

RJ45 Connector, Single Port, 1 x 1, Jack, Cat 5, Inverted - Latch Up, 8 Position, Low Profile, Surface Mount, Right Angle, Side Entry, None



ANTE TE Part # 188729-1 8P.COVER/SOLD.STOP

Customers Also Bought




TE Part #225361-E

TE Part #42095-1 250 FASTON TAB TPBR TE Part #4-641215-0

TE Part #1-2176081-1

M12 METAL SHELL, MALE, RA, SW16

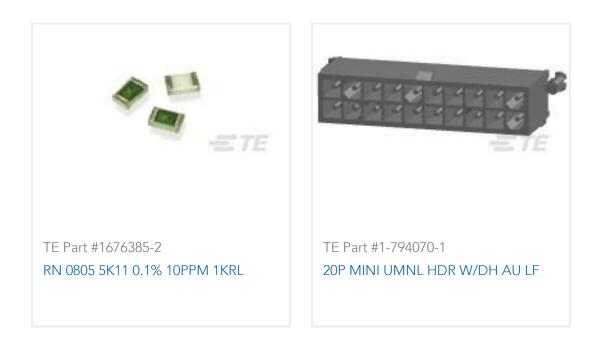

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5406721-1_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5406721-1_E.3d_igs.zip

English

C For support call+1 800 522 6752

RJ45 Connector, Single Port, 1 x 1, Jack, Cat 5, Inverted - Latch Up, 8 Position, Low Profile, Surface Mount, Right Angle, Side Entry, None



Customer View Model

ENG_CVM_CVM_5406721-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

82066 - Modular Jacks and MRJ21 Product catalog - Single Port Modular Jacks section

English

Product Specifications

Application Specification

English

Application Specification

English

Agency Approvals UL Report

English