

AMP-HDI

TE Internal #: 5532903-3 PCB Mount Receptacle, Right Angle, Board-to-Board, 128 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Black, Tube

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: PCB Mount Receptacle

PCB Mount Orientation: Right Angle

Connector System: Board-to-Board

Number of Positions: 128

Number of Rows: 4

Features

Product Type Features

PCB Connector Type Connector System

Sealable

PCB Mount Receptacle

Board-to-Board

No



Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly
Configuration Features	
Stackable	No
PCB Mount Orientation	Right Angle
Number of Positions	128
Number of Rows	4
Electrical Characteristics	
Insulation Resistance	4 MΩ
Body Features	
Primary Product Color	Black
Contact Features	
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
PCB Contact Termination Area Plating Material Thickness	1.27 – 2.54 μm[3.937 μin]
Contact Shape & Form	Four Beam

C For support call+1 800 522 6752

PCB Mount Receptacle, Right Angle, Board-to-Board, 128 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Black, Tube



Contact Layout	Matrix
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Socket
Contact Current Rating (Max)	3 A
Termination Features	
Rectangular Termination Post & Tail Width	.58 mm[.023 in]
Rectangular Termination Post & Tail Thickness	.25 mm[.01 in]
Termination Post & Tail Length	3.05 mm[.12 in]
Termination Method to PCB	Through Hole - Solder
Mechanical Attachment	
Mating Alignment Type	Polarization
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Housing Material	Thermoplastic
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
PCB Thickness (Recommended)	2.36 mm[.76 in]
Connector Height	11.02 mm[.433 in]
Usage Conditions	
Housing Temperature Rating	High
Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	5

C For support call+1 800 522 6752

PCB Mount Receptacle, Right Angle, Board-to-Board, 128 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Black, Tube



Packaging Method Tube **Product Compliance** For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU Compliant EU ELV Directive 2000/53/EC Compliant No Restricted Materials Above Threshold China RoHS 2 Directive MIIT Order No 32, 2016 Current ECHA Candidate List: JAN 2025 EU REACH Regulation (EC) No. 1907/2006 (247) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC Halogen Content BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources. Solder Process Capability Pin-in-Paste capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Customers Also Bought

PCB Mount Receptacle, Right Angle, Board-to-Board, 128 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Black, Tube



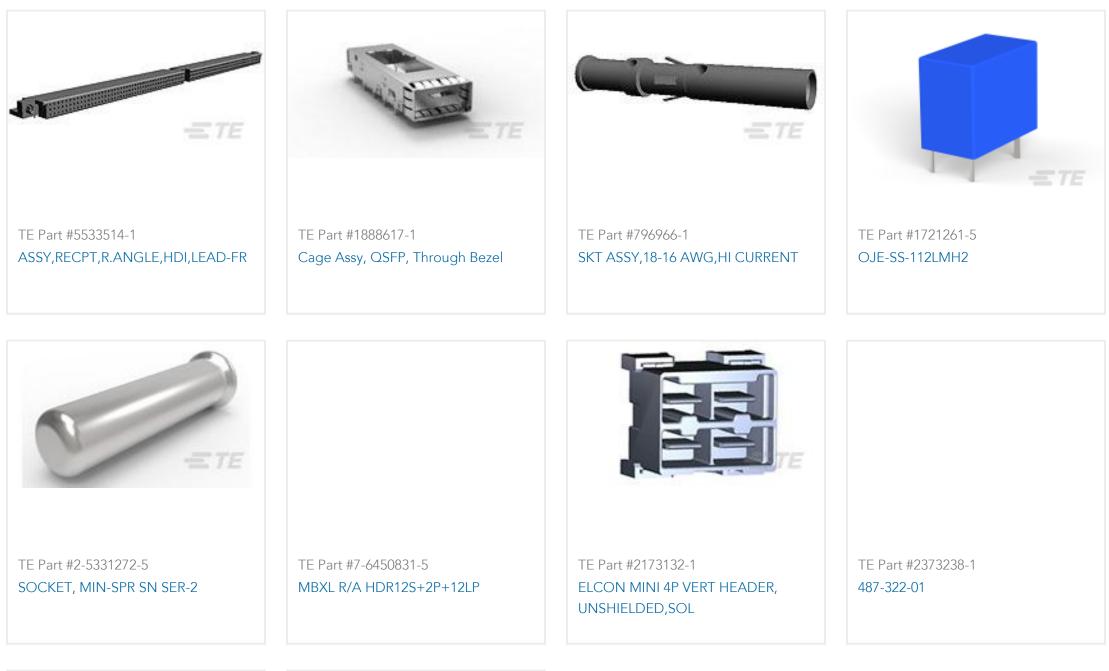



Documents

Product Drawings ASSY, RECPT, R.ANGLE, HDI, LEAD-FR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5532903-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5532903-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5532903-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

C For support call+1 800 522 6752

PCB Mount Receptacle, Right Angle, Board-to-Board, 128 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Black, Tube



Application Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals

Agency Approval Document

English