


CHAMP

TE Internal #: 553444-4 50 Position D-Shaped Connector, Plug, Cable-to-Board, Board Mount, 2.16 mm [.085 in] Centerline, Printed Circuit Board, Signal View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Plug Assembly: Vertical, Action Pin, 2.16mm

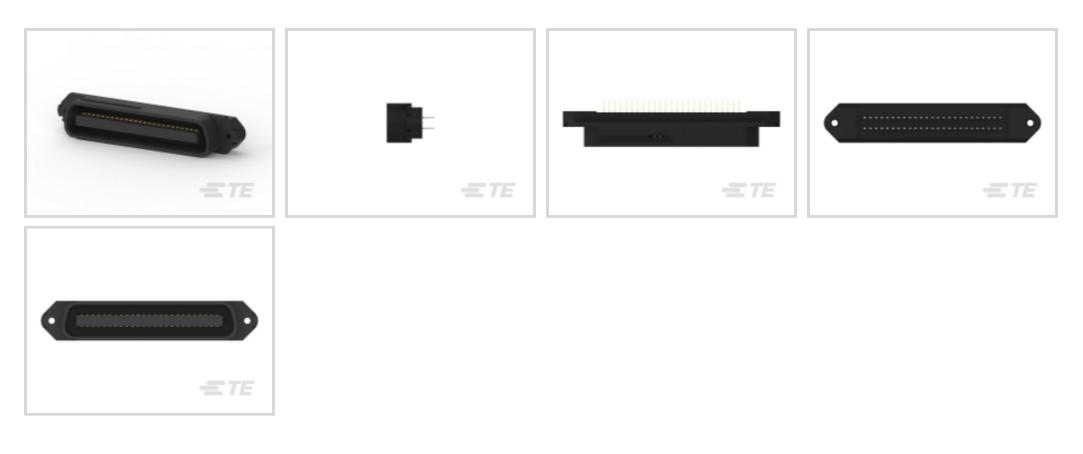

Number of Positions: 50

Connector & Housing Type: Plug

Connector System: Cable-to-Board

Connector Mounting Type: Board Mount

Centerline (Pitch): 2.16 mm [.085 in]

All D-Sub Plug Assembly: Vertical, Action Pin, 2.16mm (4)

Features

Product Type Features

Connector & Housing Type	Plug
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Vertical
Number of Rows	2
Number of Positions	50
Body Features	
Primary Product Color	Black
Connector Profile	Standard
Contact Features	
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Copper Alloy

50 Position D-Shaped Connector, Plug, Cable-to-Board, Board Mount, 2.16 mm [.085 in] Centerline, Printed Circuit Board, Signal



Contact Mating Area Plating Material Thickness	.76 µm
Contact Current Rating (Max)	3 A
Contact Options	Installed
Termination Features	
Rectangular Termination Post & Tail Width	.66 mm[.026 in]
Rectangular Termination Post & Tail Thickness	.48 mm[.018 in]
Termination Method to PCB	Through Hole - Press-Fit
Mechanical Attachment	
Mounting Hole Diameter	3.3 mm
Mating Retention	Without
PCB Mount Retention Type	Action/Compliant Tail
Panel Attachment Style	Rear Mount
PCB Mount Retention	With
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester
Centerline (Pitch)	2.16 mm[.085 in]

Dimensions

Row-to-Row Spacing	4.06 mm[.16 in]
PCB Thickness (Recommended)	1.57 – 3.18 mm[.062 – .125 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Shielded	No
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Tray
Packaging Quantity	20

Product Compliance

C For support call+1 800 522 6752

50 Position D-Shaped Connector, Plug, Cable-to-Board, Board Mount, 2.16 mm [.085 in] Centerline, Printed Circuit Board, Signal



For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-




Compatible Parts



Customers Also Bought

50 Position D-Shaped Connector, Plug, Cable-to-Board, Board Mount, 2.16 mm [.085 in] Centerline, Printed Circuit Board, Signal



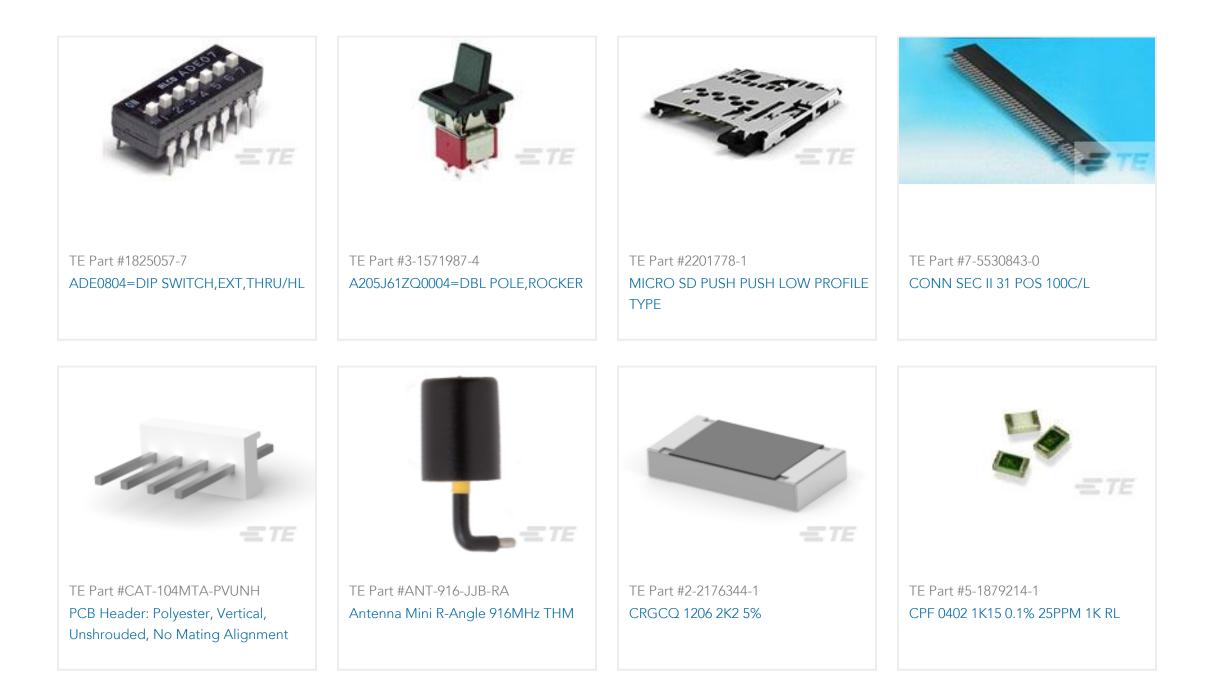

Documents

Product Drawings PLUG ASSY, ACTION PIN, CHAMP-LOK

English

CAD Files

Customer View Model ENG_CVM_CVM_553444-4_V.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_553444-4_V.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_553444-4_V.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Product Specifications Application Specification English **Application Specification** English

CHAMP Action Pin Connectors

English

Instruction Sheets

50 Position D-Shaped Connector, Plug, Cable-to-Board, Board Mount, 2.16 mm [.085 in] Centerline, Printed Circuit Board, Signal



Instruction Sheet (U.S.)

English

AMP CHAMP ACTION PIN Connectors (Preloaded)

English

Agency Approvals CSA Certificate

English