



Heat Shrink Tubing > Single Wall SFR: Heat Shrink Tubing, 1.75:1 Shrink Ratio



Tubing Product Type: **Heat Shrink Tubing**

Primary Product Color: **Black**

Shrink Ratio: **1.75:1**

Wall Type: **Single Wall**

Recovered Inside Diameter (Max): **9.1 mm [.36 in]**

[All Single Wall SFR: Heat Shrink Tubing, 1.75:1 Shrink Ratio \(13\)](#)

Features

Product Type Features

Tubing Product Type	Heat Shrink Tubing
Wall Type	Single Wall

Electrical Characteristics

Operating Voltage (Max)	.6 kV
-------------------------	-------

Body Features

Fluid Type	Aviation Fuel, Brake Fluid, Hydraulic Fluid, Lubricating Oil, Water
Primary Product Color	Black
Shrink Ratio	1.75:1
Primary Product Material	Crosslinked Silicone Elastomer
Flexibility	Very Flexible

Dimensions

Recovered Wall Thickness (Nominal)	1.32 mm[.052 in]
Recovered Inside Diameter (Max)	9.1 mm[.36 in]
Expanded Inside Diameter (Min)	15.9 mm[.625 in]

Usage Conditions

Shrink Temperature (Min)	175 °C
--------------------------	--------



Tubing Flammability Type	Flame-Retardant
Operating Temperature Range	-75 – 180 °C
Recovery Temperature	175 °C

Operation/Application

Mechanical Resistance	Fluids, Strain Relief
-----------------------	-----------------------

Product Availability

Applicable Region	Worldwide
-------------------	-----------

Packaging Features

Packaging Method	Piece
------------------	-------

Other

Meets Low Outgassing Requirements	No
Product Source	US

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Customers Also Bought




TE Part #52942
TERMINAL,PIDG SPR SPD 12-10 8



TE Part #CAT-R21-T7907
Single Wall DR 25: Heat Shrink Tubing, 2:1 Shrink Ratio



TE Part #3-1617146-0
JMGACDD-26MW = M39016/19-042M

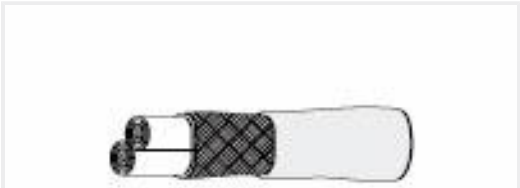

TE Part #162927-000
55A1121-16-9/96-9CS2275



TE Part #350551-3
UMNL SOK 20-14 PTPPHBZ L/P



TE Part #650076-000
D-436-38



TE Part #865656-4
7 PIN MIN PLUG KIT

Documents

Product Drawings

SFR-5/8-0-SP

English

Datasheets & Catalog Pages

1654025_Sec3_SFR

English

raychem-tubing-product-selection-guide

English

Product Specifications

Product Specification

English