




Connectors > Contacts > Connector Contacts

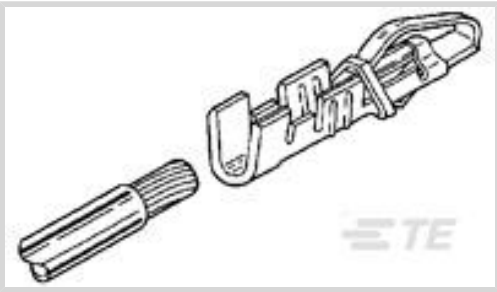

Contact Type: **Socket**
Contact Mating Area Plating Material: **Gold (Au)**
Wire Contact Termination Area Plating Material: **Gold Flash**
Contact Retention Within Housing: **With**
Contact Retention Type Within Housing: **Locking Lance**

Features

Product Type Features

Discrete Wire Type	Solid or Stranded
Sealable	No

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Contact Features

Contact Underplating Material	Nickel
Contact Orientation	Straight
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Length	14.48 mm[.57 in]
PCB Contact Termination Area Plating Material	Gold Flash
Barrel Type	Open
Contact Type	Socket
Contact Mating Area Plating Material	Gold (Au)
Wire Contact Termination Area Plating Material	Gold Flash
Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	5 A



Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Contact Retention Type Within Housing	Locking Lance

Dimensions

Compatible Insulation Diameter Range	1.27 – 1.63 mm[.05 – .064 in]
Wire Size	254.1 – 642.5 CMA

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Quantity	6000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent



chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp




TE Part # 465195-1
AMP-LEAF EXTRACTION TOOL


Customers Also Bought

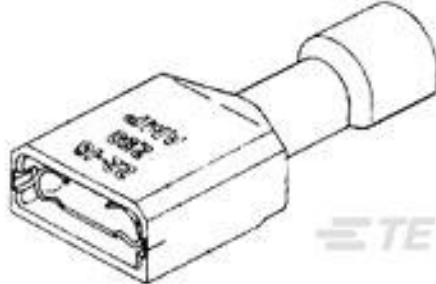


TE Part #3-520410-2
ULTRA-FAST 187 ASY REC 16-14 AWG TPBR




TE Part #2-1411573-1
ELOGED F5700Y75




TE Part #925076
4W CIRCULAR MATE-N-LOK SOCKET HSG NAT




TE Part #1825190-7
DIP Shunt,8 pos

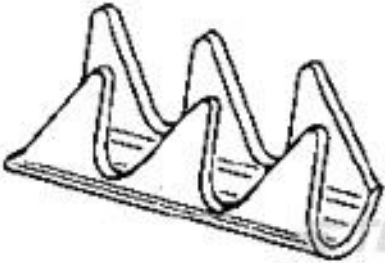


TE Part #926933-1
WIRE PIN 18-17 AWG .01 PTPB




TE Part #1393436-4
V23542C1028B300=KABELBAUMST. 8




TE Part #6473418-1
SUPER SEAL 26POS CAP ASSY V AU



TE Part #794273-1
04P UMNL INTERFACE SEAL



TE Part #60445-2
SPADE .137 24-20 AWG TPBR

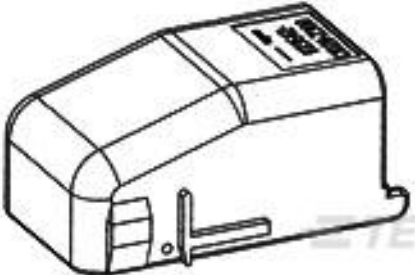

TE Part #1393454-5
V23542C1028Z300=ABDECK 28PDIC

Documents



Product Drawings

CONT AMP LF

English

CONT AMP LF

English

CAD Files

Customer View Model

ENG_CVM_CVM_583204-2_DF.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_583204-2_DF.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_583204-2_DF.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

POWER_CONNECTORS_CATALOG_SEC02_CABLE_MOUNTED

English

Product Specifications

Application Specification

English

Application Specification

Japanese

AMP-LEAF Contact

English

Application Specification

Japanese

AMP-LEAF Contacts

Japanese